

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 IE3 Three-Phase

Product code : 15624535

Frame	: 280S/M	Locked rotor time	: 36s (cold) 20s (hot)
Output	: 110 kW (150 HP)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 134 A	Protection degree	: IP55
L. R. Amperes	: 1058 A	Cooling method	: IC411 - TEFC
LRC	: 7.9	Mounting	: B3R(E)
No load current	: 42.1 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1785 rpm	Noise level ²	: 73.0 dB(A)
Slip	: 0.83 %	Starting method	: VFD
Rated torque	: 60.0 kgfm	Approx. weight ³	: 827 kg
Locked rotor torque	: 240 %		
Breakdown torque	: 270 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 2.33 kgm ²		
Design	: N		

Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	94.8	95.5	95.8	Max. traction	: 1004 kgf
Power Factor	0.00	0.75	0.83	0.86	Max. compression	: 1832 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
4.4	3.0	2.3	2.9	1.7	1.4	0.7

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6316 C3	6316 C3
Sealing	:	WSeal	WSeal
Lubrication interval	:	10000 h	10000 h
Lubricant amount	:	34 g	34 g
Lubricant type	:	Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in IEC 60034-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	16/01/2024		1 / 3	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermistor - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	16/01/2024		2 / 3	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IE3 Three-Phase

Product code : 15624535

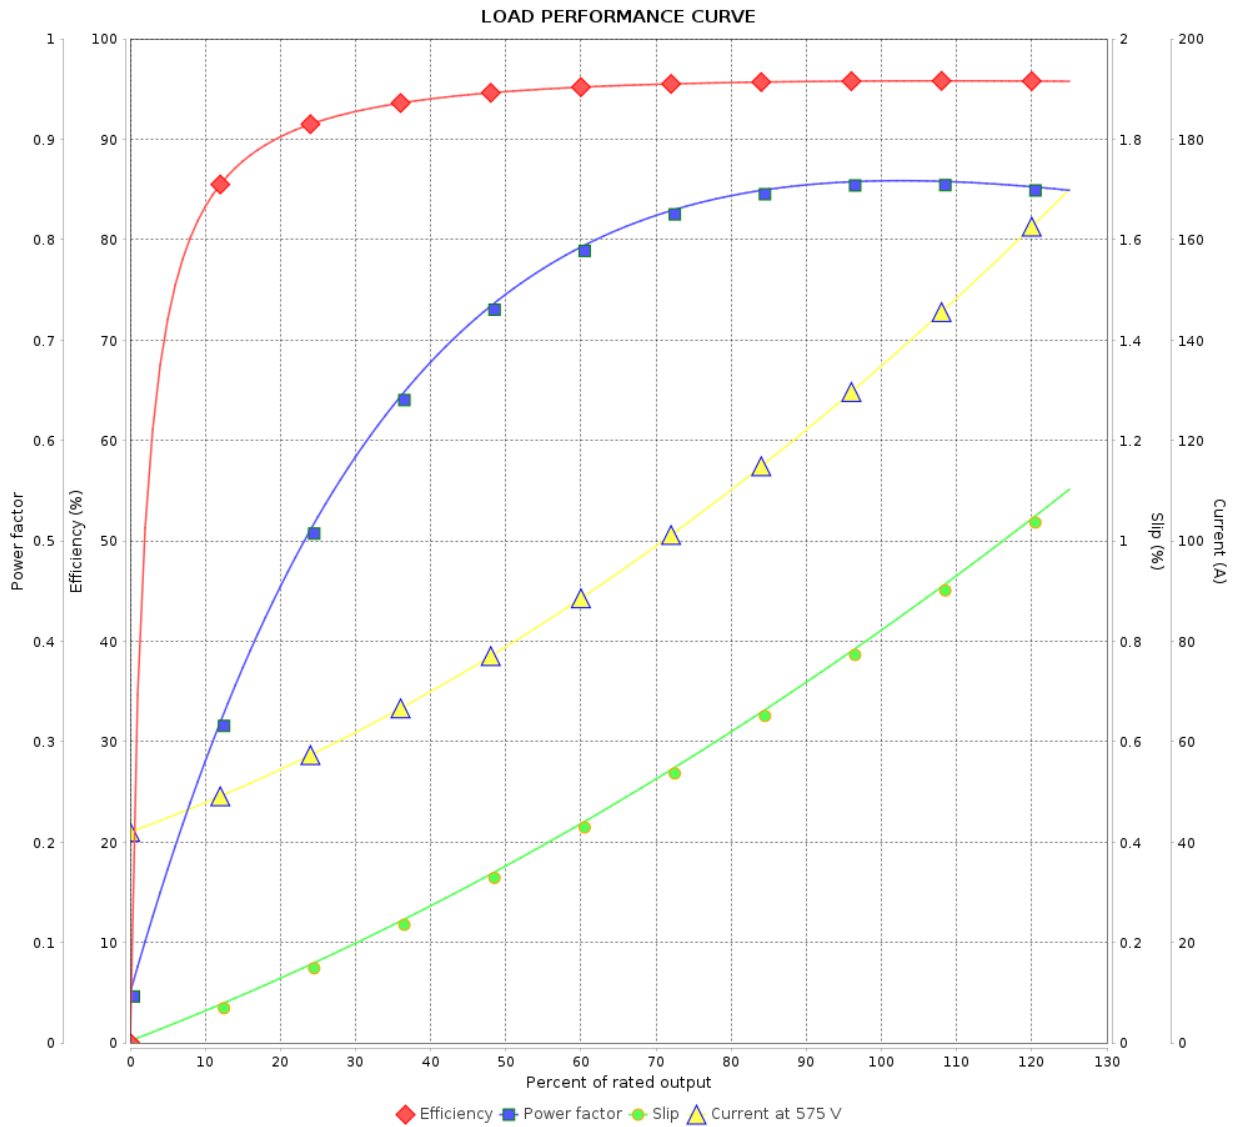

Performance : 575 V 60 Hz 4P

Rated current : 134 A
 LRC : 7.9
 Rated torque : 60.0 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 270 %
 Rated speed : 1785 rpm

Moment of inertia (J) : 2.33 kgm²
 Duty cycle : S1
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				