

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line : W22 Close Coupled Pump JP NEMA Premium Efficiency Three-Phase			Product code : 15712252			
Frame	: 182/4JP		Locked rotor time	: 30s (cold) 17s (hot)		
Output	: 7.5 HP (5.5 kW)		Temperature rise	: 80 K		
Poles	: 2		Duty cycle	: Cont.(S1)		
Frequency	: 60 Hz		Ambient temperature	: -20°C to +40°C		
Rated voltage	: 575 V		Altitude	: 1000 m.a.s.l.		
Rated current	: 7.01 A		Protection degree	: IP55		
L. R. Amperes	: 57.5 A		Cooling method	: IC411 - TEFC		
LRC	: 8.2x(Code J)		Mounting	: F-1		
No load current	: 2.32 A		Rotation ¹	: Both (CW and CCW)		
Rated speed	: 3485 rpm		Noise level ²	: 66.0 dB(A)		
Slip	: 3.19 %		Starting method	: Direct On Line		
Rated torque	: 1.56 kgfm		Approx. weight ³	: 45.1 kg		
Locked rotor torque	: 270 %					
Breakdown torque	: 330 %					
Insulation class	: F					
Service factor	: 1.25					
Moment of inertia (J)	: 0.0095 kgm ²					
Design	: A					
Output	50%	75%	100%	Foundation loads		
Efficiency (%)	88.5	89.5	89.5	Max. traction	: 85 kgf	
Power Factor	0.75	0.84	0.88	Max. compression	: 130 kgf	
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
11.4	9.4	8.7	5.3	3.4	2.1	1.3
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6307 ZZ		6206 ZZ		
Sealing	:	V'Ring		V'Ring		
Lubrication interval	:	-		-		
Lubricant amount	:	-		-		
Lubricant type	:	Mobil Polyrex EM				
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	15/01/2024				1 / 2	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : W22 Close Coupled Pump JP NEMA
Premium Efficiency Three-Phase

Product code : 15712252

LOAD PERFORMANCE CURVE

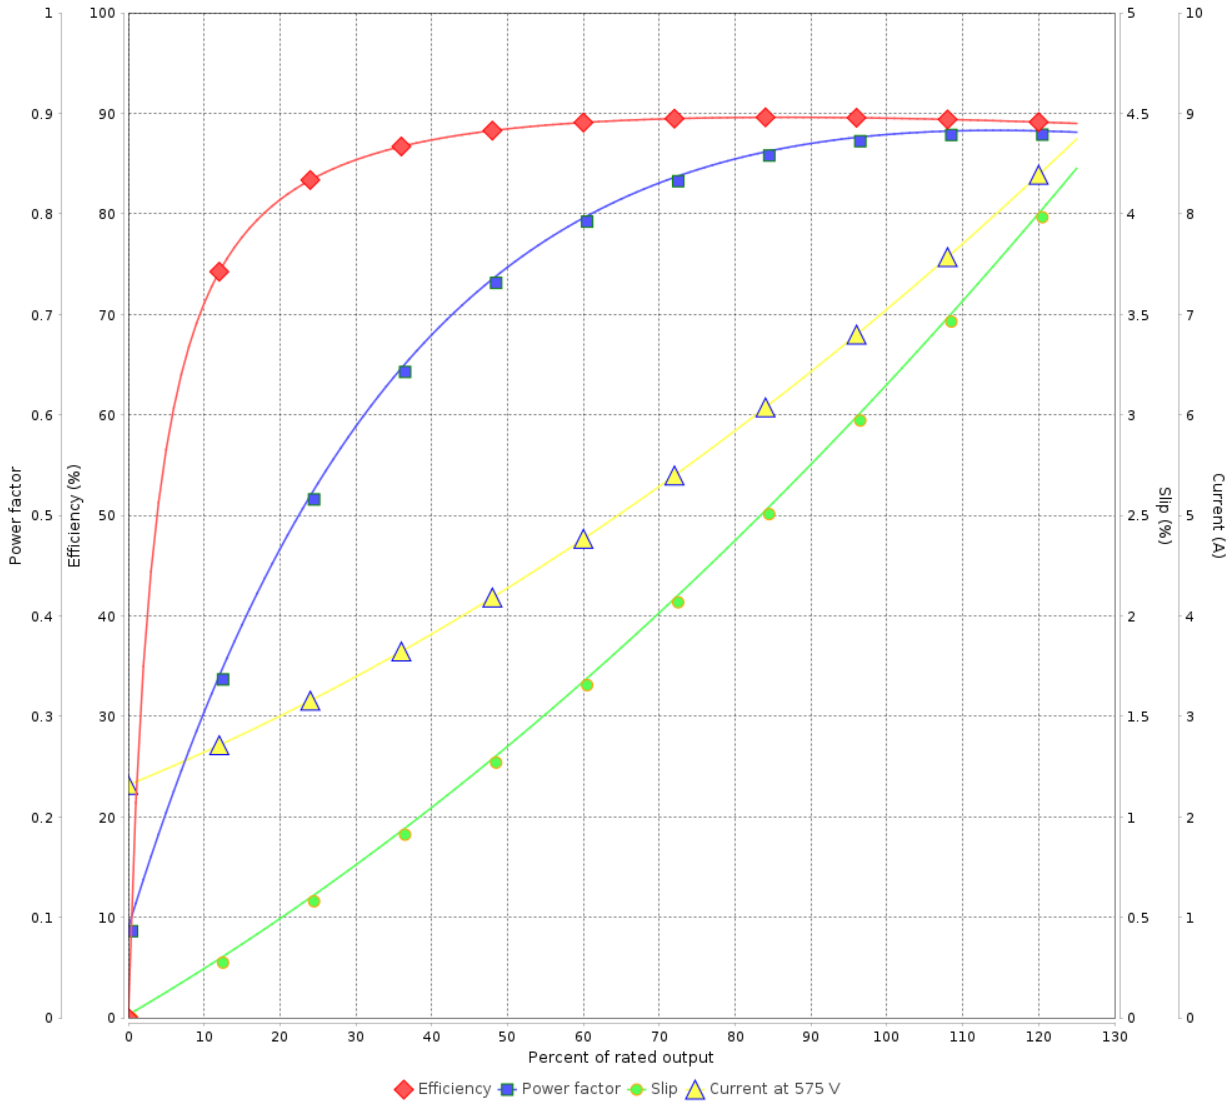

Performance : 575 V 60 Hz 2P

Rated current : 7.01 A
LRC : 8.2
Rated torque : 1.56 kgfm
Locked rotor torque : 270 %
Breakdown torque : 330 %
Rated speed : 3485 rpm

Moment of inertia (J) : 0.0095 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	15/01/2024			