

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line		: W21 In Line Extra Thrust NEMA Premium Efficiency Three-Phase		Product code : 15845772		
Frame	: 184LP		Locked rotor time	: 30s (cold) 17s (hot)		
Output	: 5 HP (3.7 kW)		Temperature rise	: 80 K		
Poles	: 4		Duty cycle	: Cont.(S1)		
Frequency	: 60 Hz		Ambient temperature	: -20°C to +40°C		
Rated voltage	: 460 V		Altitude	: 1000 m.a.s.l.		
Rated current	: 6.57 A		Protection degree	: IP55		
L. R. Amperes	: 46.6 A		Cooling method	: IC411 - TEFC		
LRC	: 7.1x(Code J)		Mounting	: W-6		
No load current	: 3.10 A		Rotation ¹	: Both (CW and CCW)		
Rated speed	: 1750 rpm		Noise level ²	: 56.0 dB(A)		
Slip	: 2.78 %		Starting method	: Direct On Line		
Rated torque	: 2.07 kgfm		Approx. weight ³	: 71.0 kg		
Locked rotor torque	: 250 %					
Breakdown torque	: 330 %					
Insulation class	: F					
Service factor	: 1.15					
Moment of inertia (J)	: 0.0156 kgm ²					
Design	: B					
Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	86.5	88.5	89.5	Max. traction	
Power Factor	0.00	0.59	0.71	0.79	Max. compression	
			<u>Drive end</u>		<u>Non drive end</u>	
Bearing type	:	6206 C3			7306BECB	
Sealing	:	Oil Seal			Lip Seal	
Lubrication interval	:	19765 h			16157 h	
Lubricant amount	:	5 g			7 g	
Lubricant type	:	Mobil Polyrex EM				
Notes						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	30/10/2024				1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W21 In Line Extra Thrust NEMA Premium Efficiency Three-Phase Product code : 15845772

LOAD PERFORMANCE CURVE

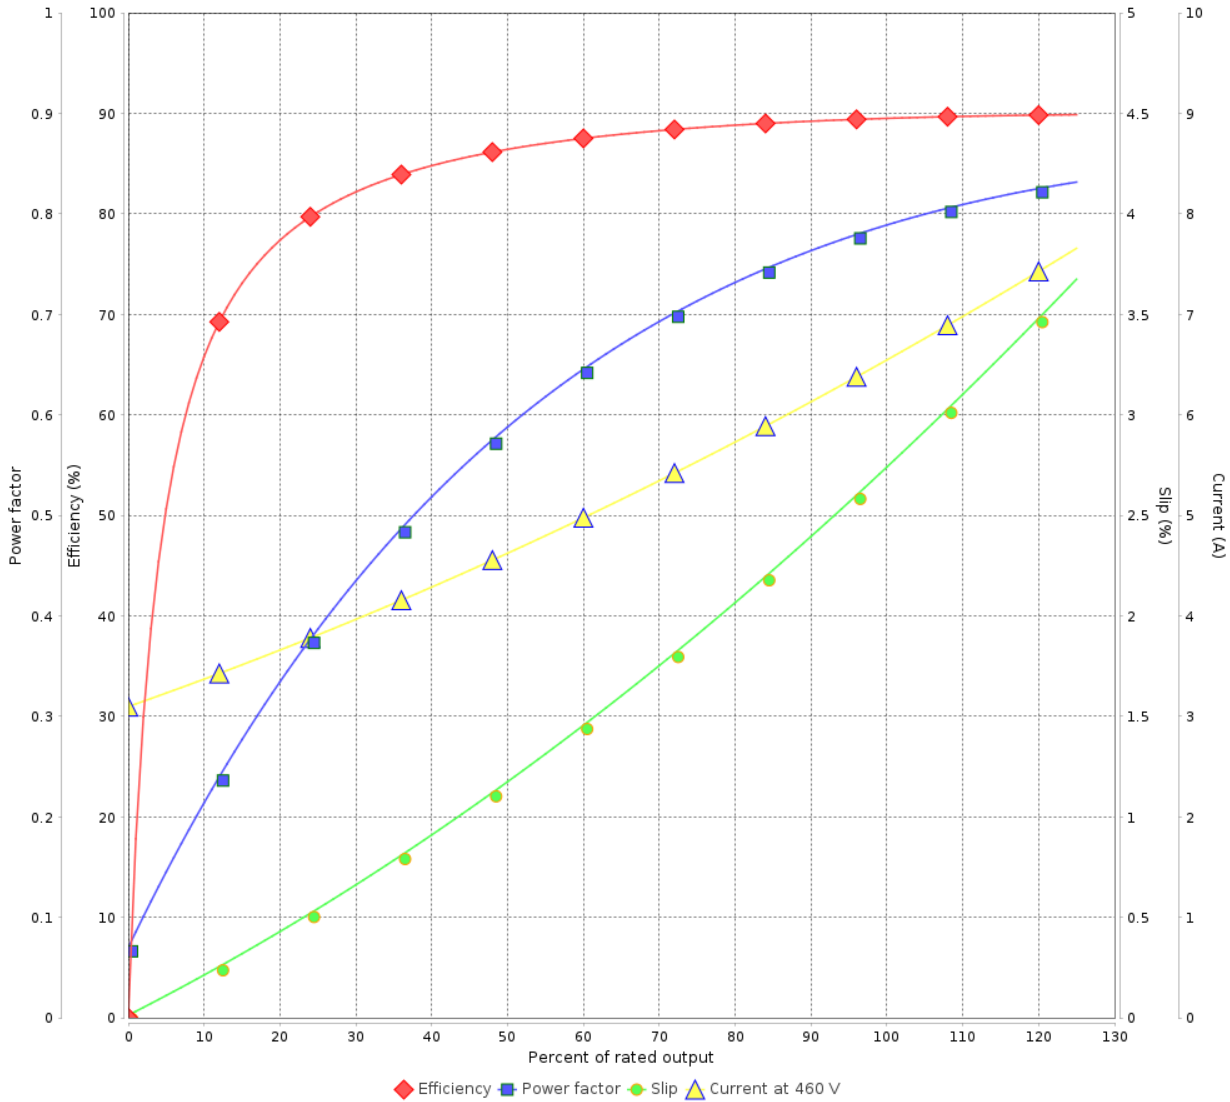

Performance : 460 V 60 Hz 4P

Rated current	: 6.57 A	Moment of inertia (J)	: 0.0156 kgm ²
LRC	: 7.1	Duty cycle	: Cont.(S1)
Rated torque	: 2.07 kgfm	Insulation class	: F
Locked rotor torque	: 250 %	Service factor	: 1.15
Breakdown torque	: 330 %	Temperature rise	: 80 K
Rated speed	: 1750 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	30/10/2024			