

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 JP Pump NEMA Premium Efficiency Three-Phase Product code : 15860068

Frame	: 284/6JP	Locked rotor time	: 28s (cold) 16s (hot)
Output	: 15 HP (11 kW)	Temperature rise	: 80 K
Poles	: 6	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 14.7 A	Protection degree	: IP23
L. R. Amperes	: 92.7 A	Cooling method	: IC01 - ODP
LRC	: 6.3x(Code G)	Mounting	: F-1
No load current	: 6.24 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1180 rpm	Noise level ²	: 59.0 dB(A)
Slip	: 1.67 %	Starting method	: Direct On Line
Rated torque	: 9.23 kgfm	Approx. weight ³	: 155 kg
Locked rotor torque	: 260 %		
Breakdown torque	: 260 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.2025 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads Max. traction Max. compression
Efficiency (%)	91.0	91.7	91.7	
Power Factor	0.67	0.77	0.82	

	<u>Drive end</u>	<u>Non drive end</u>
Bearing type	: 6311 Z C3	: 6211 Z C3
Sealing	: Without Bearing Seal	: Without Bearing Seal
Lubrication interval	: 20000 h	: 20000 h
Lubricant amount	: 18 g	: 11 g
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 1 / 2	Revision
Checked by				
Date	30/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W40 JP Pump NEMA Premium Efficiency Three-Phase Product code : 15860068

LOAD PERFORMANCE CURVE

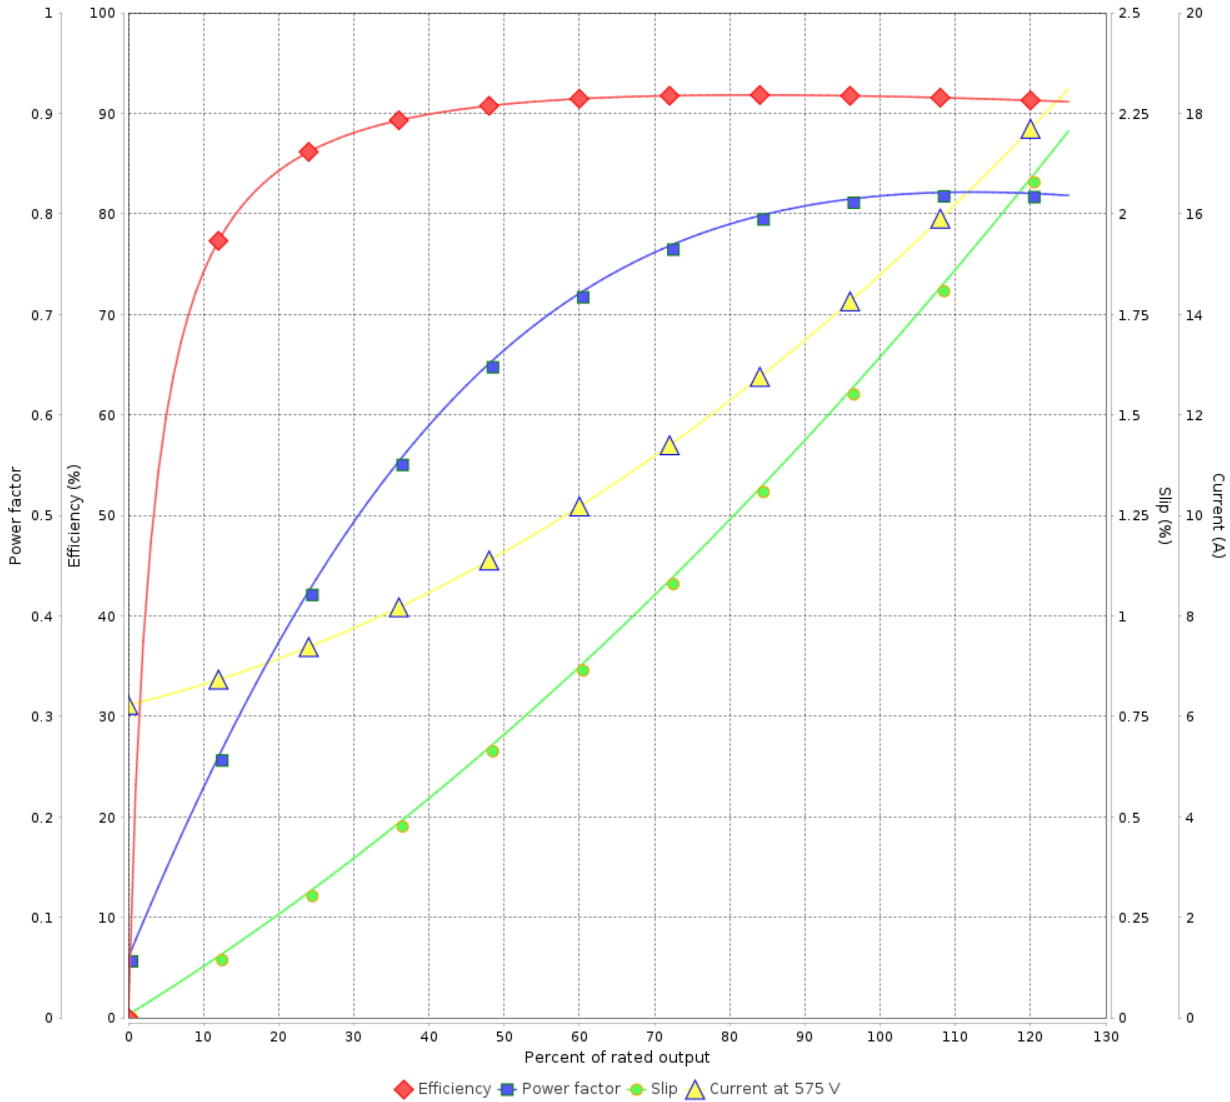

Performance : 575 V 60 Hz 6P

Rated current	: 14.7 A	Moment of inertia (J)	: 0.2025 kgm ²
LRC	: 6.3	Duty cycle	: Cont.(S1)
Rated torque	: 9.23 kgfm	Insulation class	: F
Locked rotor torque	: 260 %	Service factor	: 1.25
Breakdown torque	: 260 %	Temperature rise	: 80 K
Rated speed	: 1180 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	30/10/2024			