

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line		: W21 Explosion Proof NEMA Premium Efficiency Three-Phase		Product code : 15946558		
Frame	: 449T	Locked rotor time	: 25s (cold) 14s (hot)			
Output	: 350 HP (260 kW)	Temperature rise	: 80 K			
Poles	: 4	Duty cycle	: Cont.(S1)			
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C			
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.			
Rated current	: 323 A	Protection degree	: IP55			
L. R. Amperes	: 2650 A	Cooling method	: IC411 - TEFC			
LRC	: 8.2x(Code J)	Mounting	: F-1			
No load current	: 122 A	Rotation ¹	: Both (CW and CCW)			
Rated speed	: 1785 rpm	Noise level ²	: 80.0 dB(A)			
Slip	: 0.83 %	Starting method	: Direct On Line			
Rated torque	: 142 kgfm	Approx. weight ³	: 1486 kg			
Locked rotor torque	: 280 %					
Breakdown torque	: 290 %					
Insulation class	: F					
Service factor	: 1.15					
Moment of inertia (J)	: 4.98 kgm ²					
Design	: A					
Output	50%	75%	100%	Foundation loads		
Efficiency (%)	95.4	95.8	96.2	Max. traction : 2867 kgf		
Power Factor	0.70	0.80	0.84	Max. compression : 4353 kgf		
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6322 C3		6319 C3		
Sealing	:	Viton Oil Seal		Viton Seal		
Lubrication interval	:	5138 h		7038 h		
Lubricant amount	:	60 g		45 g		
Lubricant type	:	Mobil Polyrex EM				
Notes						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	22/10/2023				1 / 3	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	22/10/2023		2 / 3	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W21 Explosion Proof NEMA Premium
Efficiency Three-Phase

Product code : 15946558

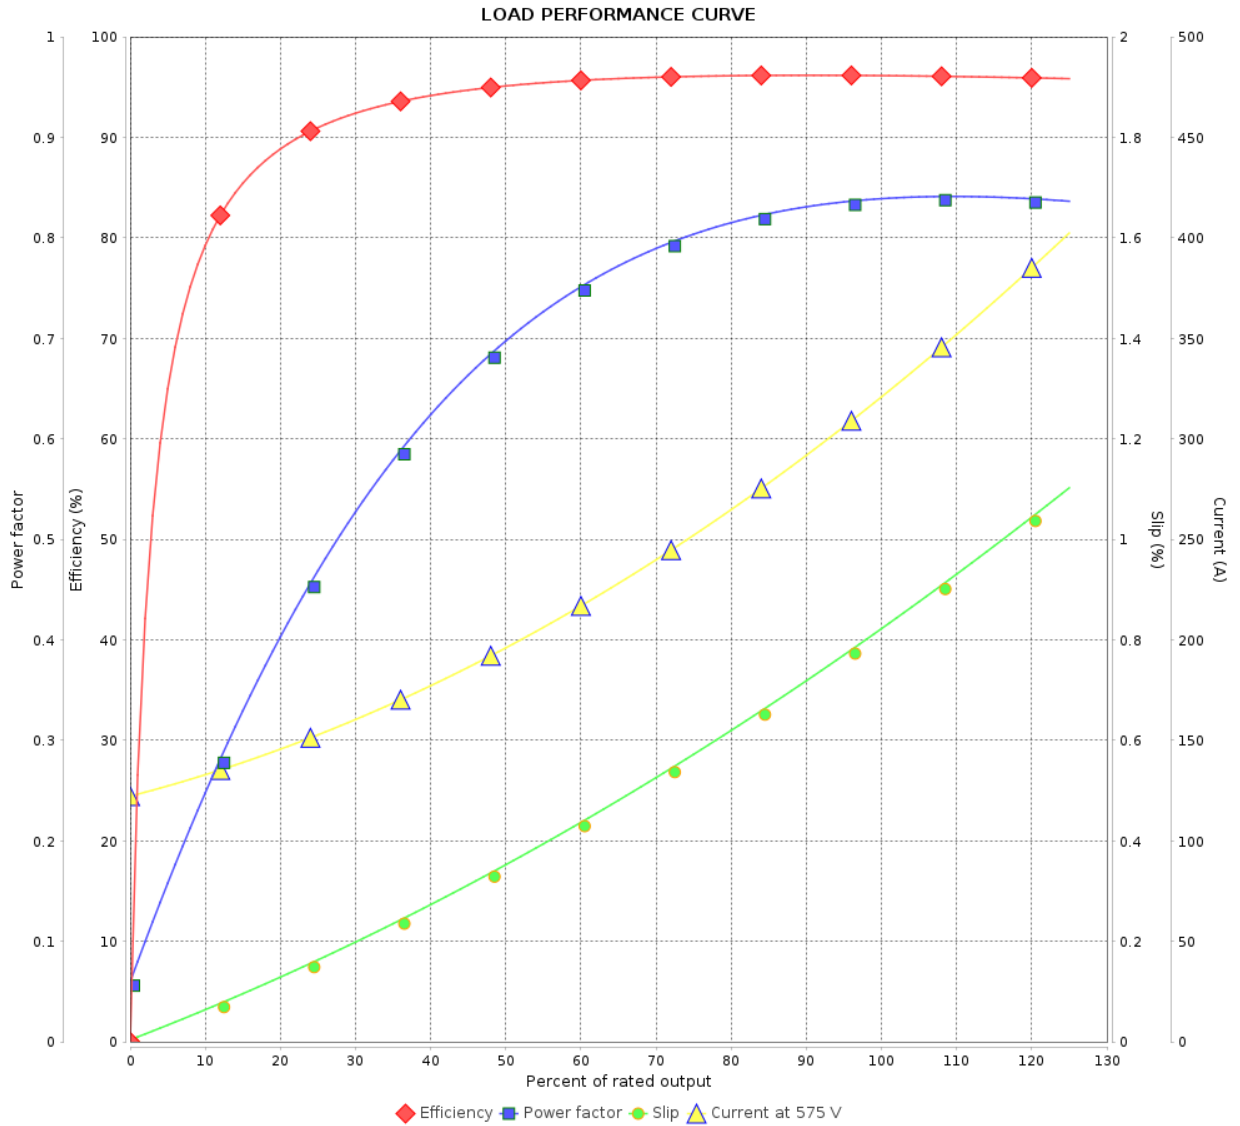

Performance : 575 V 60 Hz 4P

Rated current : 323 A
LRC : 8.2
Rated torque : 142 kgfm
Locked rotor torque : 280 %
Breakdown torque : 290 %
Rated speed : 1785 rpm

Moment of inertia (J) : 4.98 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 3		
Date		22/10/2023		