DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: Special Motor
Product code	: 16240921

Frame	: 324LP
Output	: 40 HP (30 kW)
Poles	: 2
Frequency	: 60 Hz
Rated voltage	: 460-230 V
Rated current	: 46.2-92.5 A
L. R. Amperes	: 305-611 A
LRC	: 6.6 Code G
No load current	: 13.0-26.0 A
Rated speed	: 3560 rpm
Slip	: 1.11 %
Rated torque	: 8.15 kgfm
Locked rotor torque	: 250 %
Pull up torque	: 200 %
Breakdown torque	: 260 %
Insulation class	: F
Service factor	: 1.25
Moment of inertia (J)	: 0.2063 kgm²

Locked rotor time	: 30 s (hot) 54 s (cold)
Temperature rise[4]	: 80 K
Duty cycle	: S1
Ambient temperature	: -20 °C to +40 °C
Altitude	: 1000 m.a.s.l
Protection degree	: IP55
Cooling method	: IC411 - TEFC
Mounting	: V1
Rotation[1]	: Both
Noise level[2]	: 81 dB(A)
Starting method	: Inverter
Approx. weight[3]	: 291 kg
Design	: B

Output	Start	50%	75%	100%
Efficiency (%)	-	92.4	93.6	93.6
Power Factor	0.44	0.79	0.85	0.87

Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -

Operation limits with inverter
6 Hz to 60 Hz (Variable torque) : 8.04 kgfm

	Drive end	Non drive end
Bearing type	6212-C3	7310BECB
Bearing type #2	-	7310BECB
Lubrication interval	6072 h	4017 h
Lubricant amount	13 g	15 g
Lubricant amount #2	-	15 g
Lubricant type	MOBIL POLYREX EM	

Notes:
See notes on page 2.

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
0.00	0.00	0.00	0.00	0.00	0.00	0.00

Standards

Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date
				01/10/2021

Performed by	yasmim		257169/2021	
Checked by	AUTOMATICO		Page	Revision
Date	01/10/2021		1/3	1

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: Special Motor
Product code	: 16240921

Notes:
In Line Extra Thrust
NEMA Premium Efficiency

Standards

Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

Rev.	Changes Summary	Performed	Checked	Date
				01/10/2021

Performed by	yasmim		257169/2021	
Checked by	AUTOMATICO		Page	Revision
Date	01/10/2021		2/3	1

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: Special Motor
Product code	: 16240921

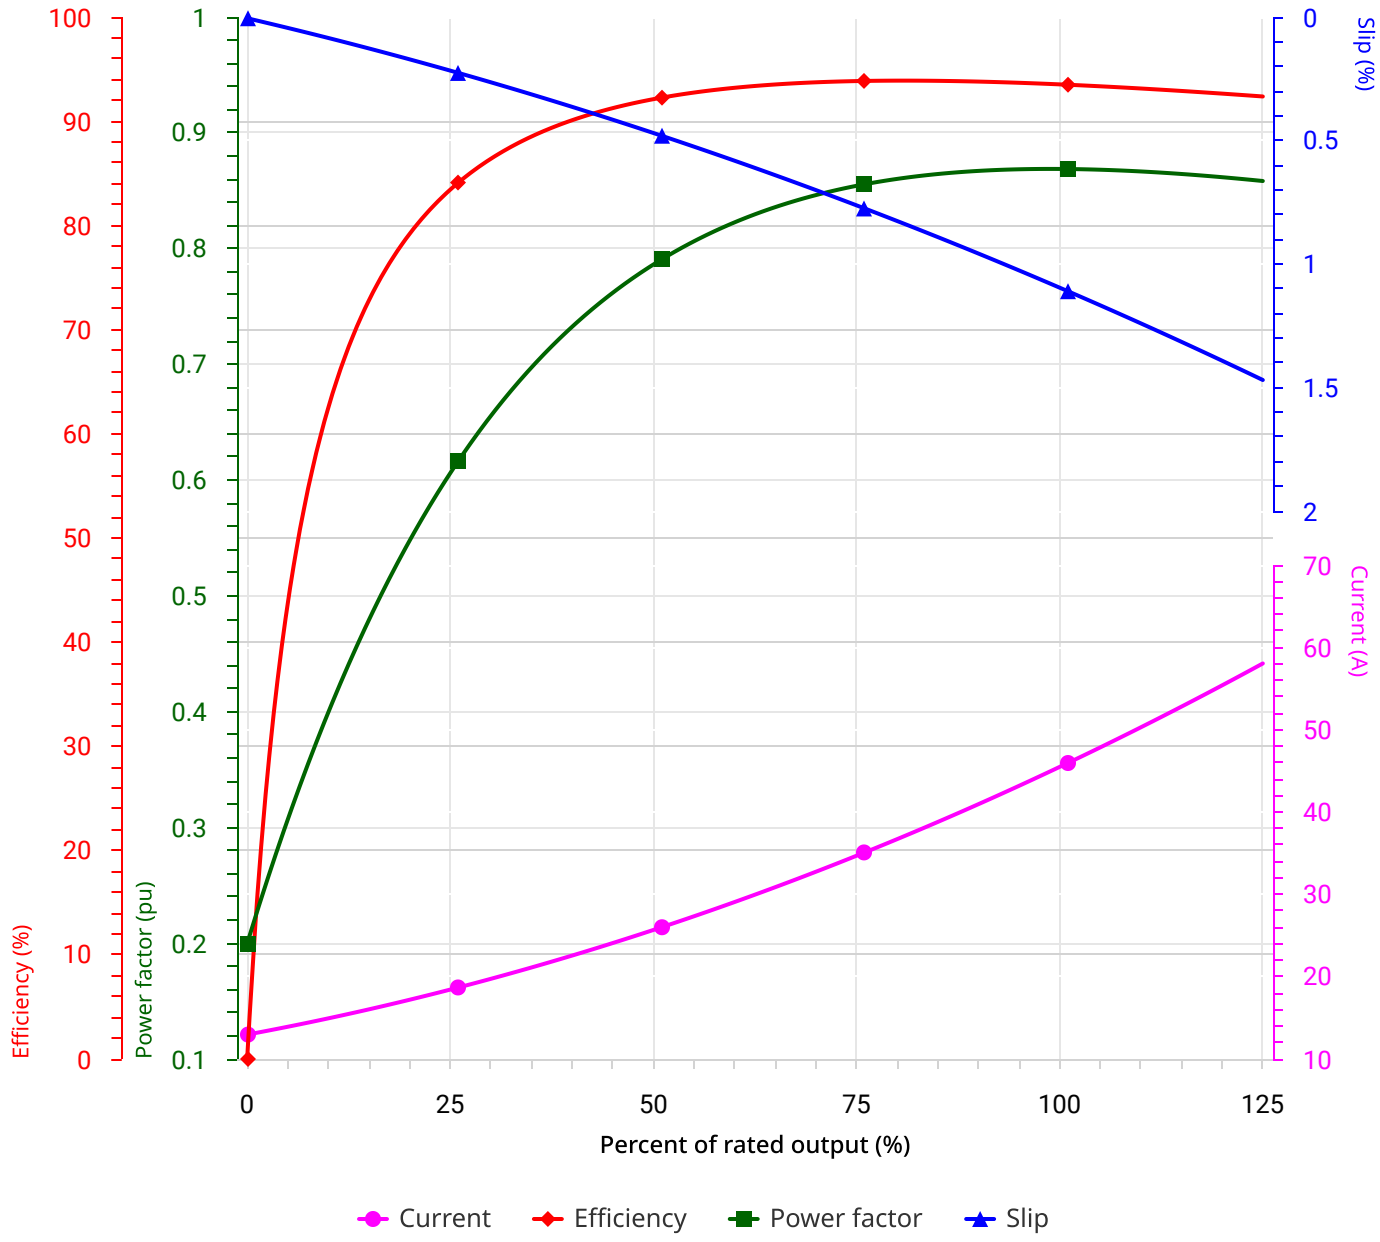

Performance	: 40 HP (30 kW) 208/460/230V 60Hz 2P 324LP

Rated current	: 102/46.2/92.5 A	Moment of inertia (J)	: 0.2063 kgm²
LRC	: 6.6 Code G	Duty cycle	: Cont.(S1)
Rated torque	: 8.15 kgfm	Insulation class	: F
Locked rotor torque	: 250 %	Service factor	: 1.25
Breakdown torque	: 260 %	Temperature rise	: 80 K
Rated speed	: 3560 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
				01/10/2021

Performed by	yasmim		257169/2021	
Checked by	AUTOMATICO		Page	Revision
Date	01/10/2021		3/3	1

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.