

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Tru-Metric IE3 Three-Phase Product code : 16430535

Frame	: 112M	Locked rotor time	: 23s (cold) 13s (hot)
Output	: 5.5 HP (4 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 5.46 A	Protection degree	: IP55
L. R. Amperes	: 51.9 A	Cooling method	: IC411 - TEFC
LRC	: 9.5	Mounting	: B35L(E)
No load current	: 2.56 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 3520 rpm	Noise level ²	: 64.0 dB(A)
Slip	: 2.22 %	Vibration	: A
Rated torque	: 1 kgfm	Starting method	: Direct On Line
Locked rotor torque	: 300 %	Approx. weight ³	: 41.0 kg
Breakdown torque	: 440 %	Painting plan	: 207A (ISO 12944 - C3)
Insulation class	: F	Color	: RAL 5009
Service factor	: 1.25	Design	: N
Moment of inertia (J)	: 0.0080 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	85.5	87.5	88.5	Max. traction	: 84 kgf
Power Factor	0.65	0.76	0.83	Max. compression	: 125 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
14.1	11.9	11.4	7.9	5.3	4.0	2.8

	Drive end	Non drive end
Bearing type	: 6207 ZZ	6206 ZZ
Sealing	: V'Ring	V'Ring
Lubrication interval	: -	-
Lubricant amount	: -	-
Lubricant type	00088	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2 Revision		
Checked by				
Date	02/10/2026			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Tru-Metric IE3 Three-Phase Product code : 16430535

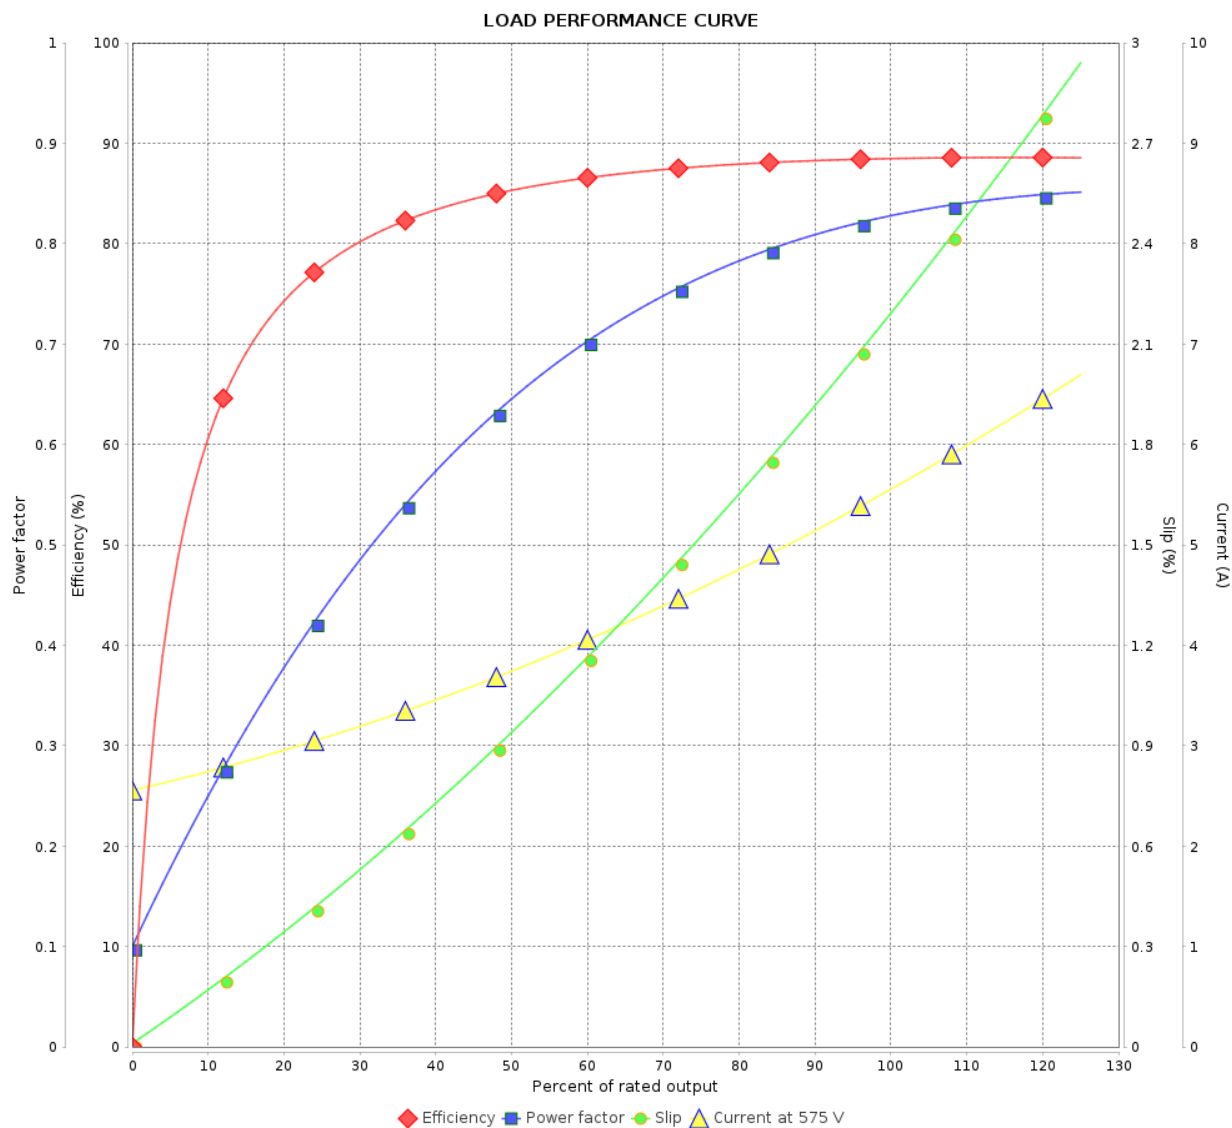

Performance : 575 V 60 Hz 2P

Rated current : 5.46 A
LRC : 9.5
Rated torque : 1 kgfm
Locked rotor torque : 300 %
Breakdown torque : 440 %
Rated speed : 3520 rpm

Moment of inertia (J) : 0.0080 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					