

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W40 JM Pump NEMA Premium Efficiency Three-Phase Product code : 16533220

Frame	: 324/6JM	Locked rotor time	: 27s (cold) 15s (hot)
Output	: 60 HP (45 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 57.5 A	Protection degree	: IP23
L. R. Amperes	: 362 A	Cooling method	: IC01 - ODP
LRC	: 6.3x(Code G)	Mounting	: F-1
No load current	: 17.6 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 3555 rpm	Noise level ²	: 75.0 dB(A)
Slip	: 1.25 %	Vibration	: A
Rated torque	: 12 kgfm	Starting method	: Direct On Line
Locked rotor torque	: 220 %	Approx. weight ³	: 233 kg
Breakdown torque	: 229 %		: 203A (ISO 12944 - C3)
Insulation class	: F		: RAL 5009
Service factor	: 1.25	Design	: B
Moment of inertia (J)	: 0.1610 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	92.4	93.0	93.6	Max. traction	: 0 kgf
Power Factor	0.72	0.81	0.84	Max. compression	: 0 kgf

	Drive end	Non drive end
Bearing type	: 6312 Z C3	: 6211 Z C3
Sealing	: Without Bearing Seal	: Without Bearing Seal
Lubrication interval	: 19658 h	: 20000 h
Lubricant amount	: 21 g	: 11 g
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 1 / 2		
Checked by				
Date	24/09/2026			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W40 JM Pump NEMA Premium
Efficiency Three-Phase

Product code : 16533220

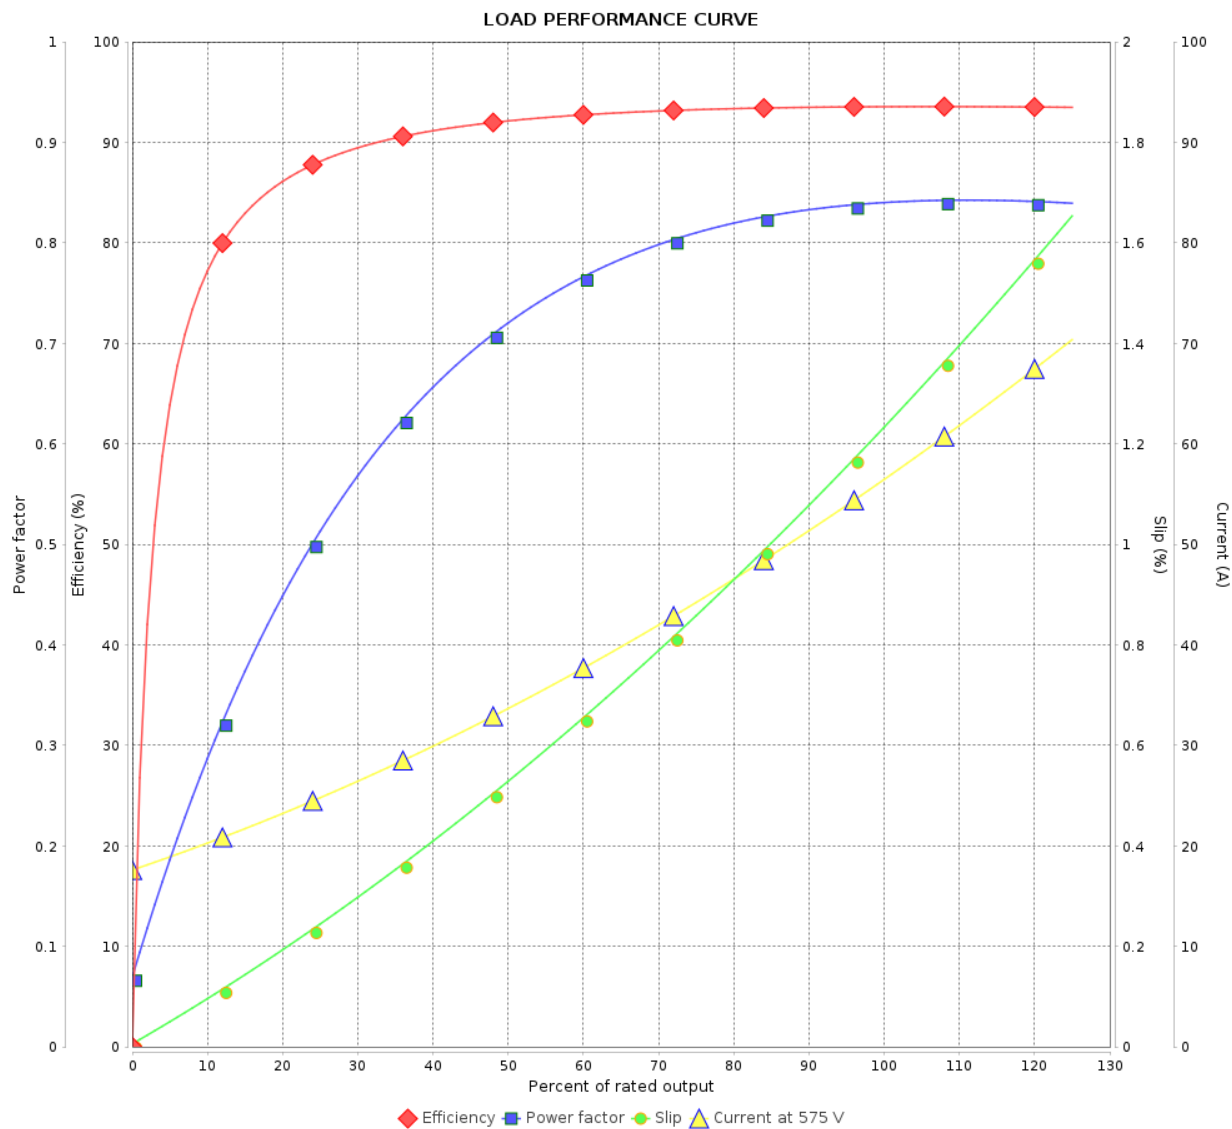

Performance : 575 V 60 Hz 2P

Rated current : 57.5 A
LRC : 6.3
Rated torque : 12 kgfm
Locked rotor torque : 220 %
Breakdown torque : 229 %
Rated speed : 3555 rpm

Moment of inertia (J) : 0.1610 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 2	Revision
Checked by					
Date	24/09/2026				