

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Multimounting High Efficiency Three-Phase Product code : 16917260

Frame	: 71	Locked rotor time	: 27s (cold) 15s (hot)
Output	: 0.5 HP (0.37 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 2.12/1.06 A	Protection degree	: IP55
L. R. Amperes	: 11.7/5.83 A	Cooling method	: IC411 - TEFC
LRC	: 5.5	Mounting	: B34L(E)
No load current	: 1.60/0.800 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1710 rpm	Noise level ²	: 47.0 dB(A)
Slip	: 5.00 %	Vibration	: A
Rated torque	: 0 kgfm	Starting method	: Direct On Line
Locked rotor torque	: 280 %	Approx. weight ³	: 6.0 kg
Breakdown torque	: 290 %	Painting plan	: 207N (ISO 12944 - C2)
Insulation class	: F	Color	: RAL 7022
Service factor	: 1.15	Design	: N
Moment of inertia (J)	: 0.0008 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	65.0	71.0	73.0	Max. traction	: 20 kgf
Power Factor	0.38	0.51	0.60	Max. compression	: 26 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
34.4	28.0	28.4	25.1	18.4	16.7	12.5

	Drive end	Non drive end
Bearing type	: 6202 ZZ	: 6202 ZZ
Sealing	: Oil Seal	: Oil Seal
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	: 00088	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	30/09/2026			

Page 1 / 2
Revision

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Multimounting High Efficiency
Three-Phase

Product code : 16917260

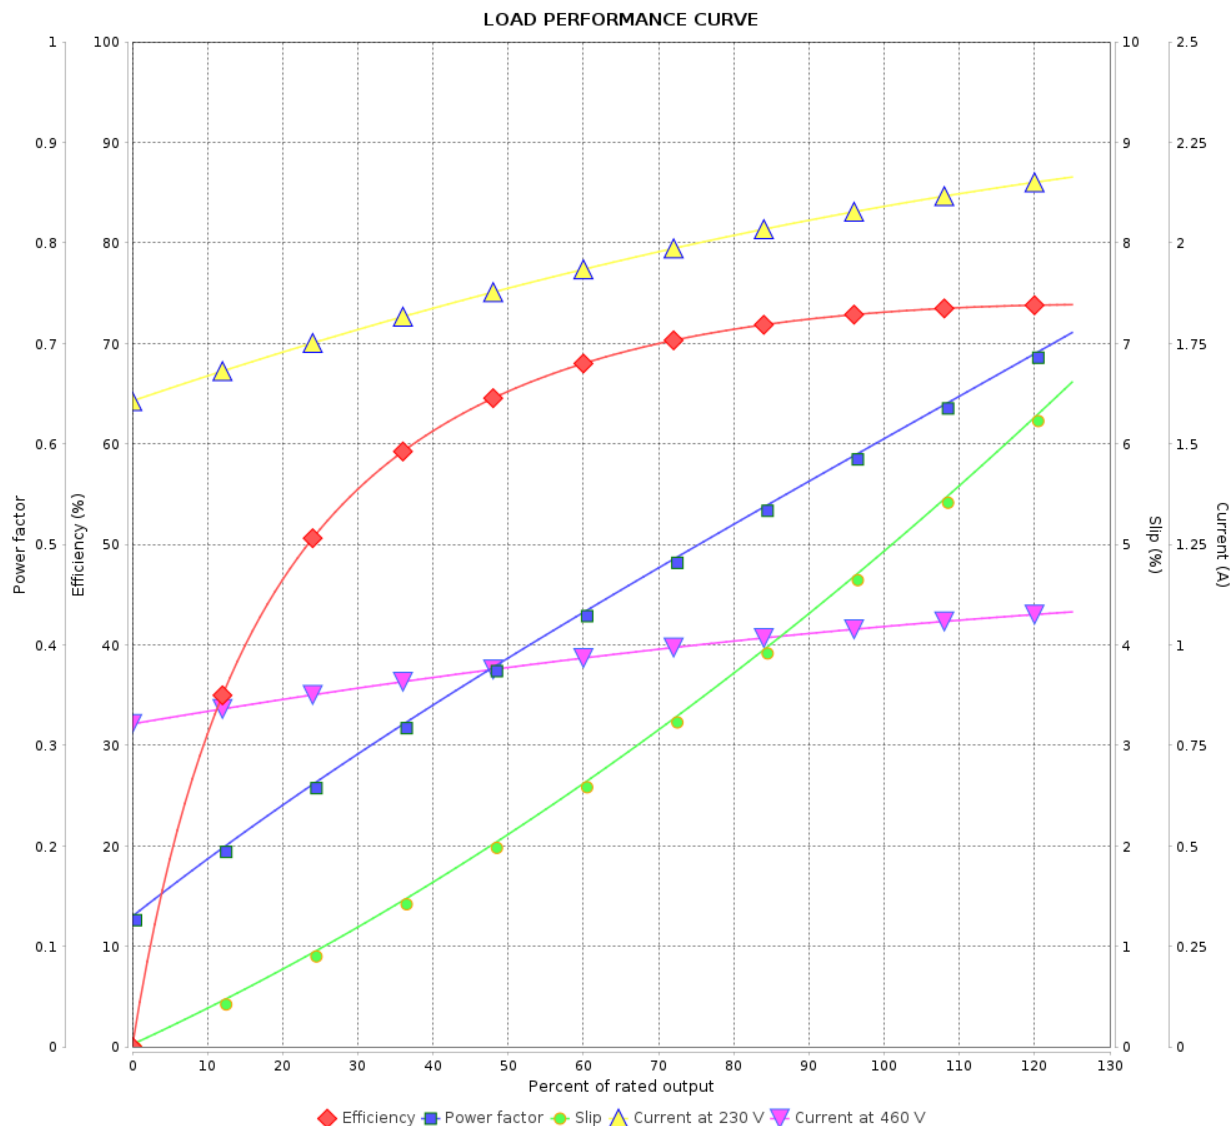

Performance : 230/460 V 60 Hz 4P

Rated current : 2.12/1.06 A
LRC : 5.5
Rated torque : 0 kgfm
Locked rotor torque : 280 %
Breakdown torque : 290 %
Rated speed : 1710 rpm

Moment of inertia (J) : 0.0008 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					