

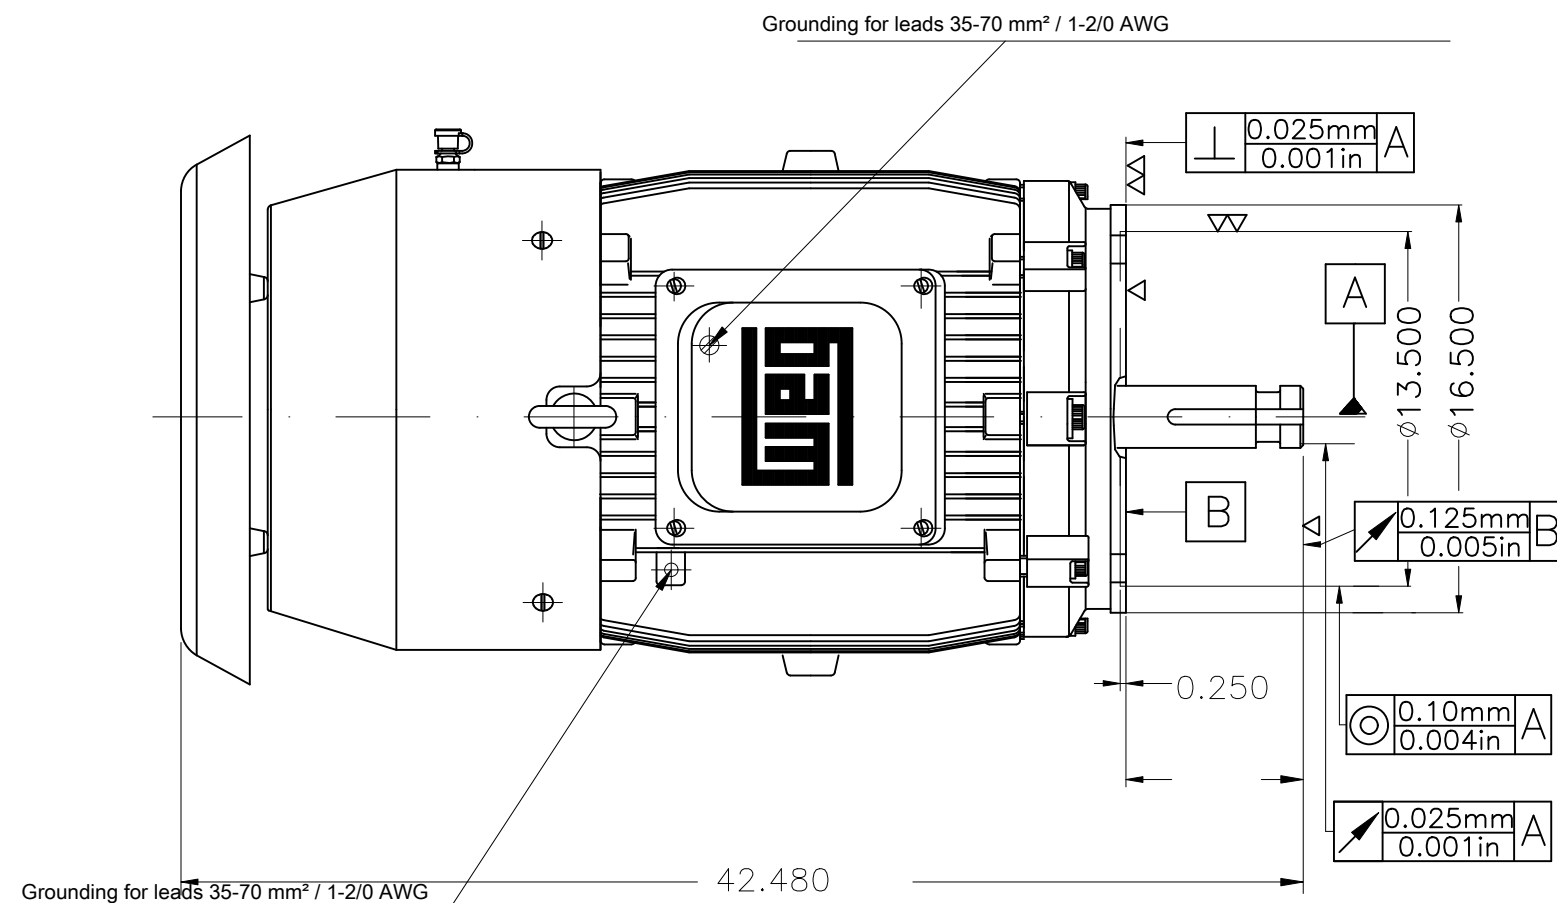


ATENÇÃO/ATTENTION
 MOTOR DEVE SER LIGADO APENAS NA POSIÇÃO VERTICAL
 MOTOR MUST BE ENERGIZED ONLY IN THE VERTICAL POSITION

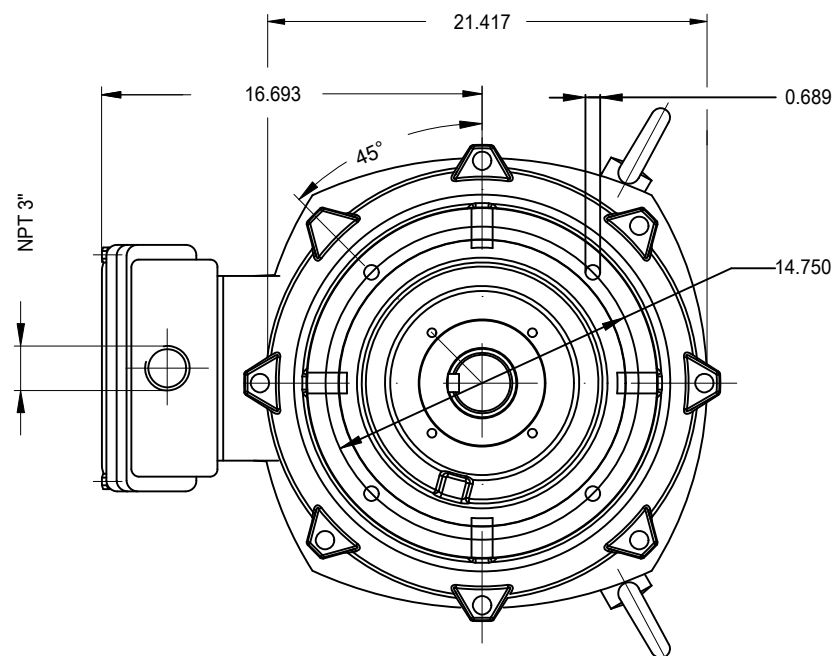

Plastic flat plug
Shaft material - SAE/ABNT 1040/45
B key
With drip cover
Fan cover - steel plate
NDE sealing - lip seal
Sealing - oil seal ring
Without epoxi in the cables outlet
Grease - Mobil Polyrex EM
Bearing cap
C3 DE bearing
Without terminal block
Without overload protector at bearing
Without Space Heaters
Without thermal protection on bearings
Without alarm thermal protection
Without switch off thermal protection
Rubber drain plug
With grease fitting
Aluminum fan
Double grounding
Color RAL 5009
Painting plan 203A
Mounting NEMA W-6
Mounting V1

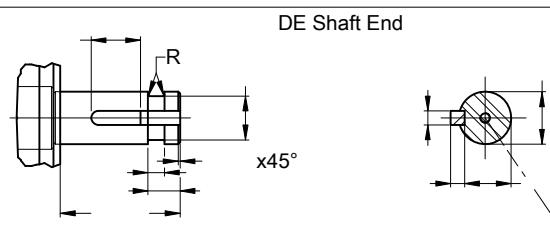

100 HP 02 Poles 60 Hz										A
							HYBRISUSER			0
ECM	LOC	SUMMARY OF MODIFICATIONS					EXECUTED	CHECKED	RELEASED	DATE VER
EXECUTED	HYBRISUSER		THREE PH. MOTOR IN LINE EXTRA THRUST NEMA PREM. EFF.					PREVIEW WDD 00		
CHECKED			FRAME 404/5LP IP55 TEFC							
RELEASED										
REL. DATE		WMO	Jaragua do Sul			Product Engineering	SHEET	1 / 1		