

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Tru-Metric IE3 Three-Phase Product code : 17966257

Frame	: 132S	Locked rotor time	: 18s (cold) 10s (hot)
Output	: 10 HP (7.5 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 24.6/12.3 A	Protection degree	: IP55
L. R. Amperes	: 226/113 A	Cooling method	: IC411 - TEFC
LRC	: 9.2	Mounting	: B35T
No load current	: 11.2/5.60 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 3550 rpm	Noise level ²	: 67.0 dB(A)
Slip	: 1.39 %	Starting method	: Direct On Line
Rated torque	: 2.04 kgfm	Approx. weight ³	: 69.0 kg
Locked rotor torque	: 280 %		
Breakdown torque	: 340 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0252 kgm ²		
Design	: N		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	86.5	89.5	90.2	Max. traction	: 111 kgf
Power Factor	0.68	0.79	0.85	Max. compression	: 180 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
10.3	7.7	6.8	6.4	3.9	3.0	1.9

	Drive end	Non drive end
Bearing type	: 6308 ZZ	: 6207 ZZ
Sealing	: V'Ring	: V'Ring
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	: 00088	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	20/08/2026			
		Page		Revision
		1 / 2		


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Tru-Metric IE3 Three-Phase Product code : 17966257

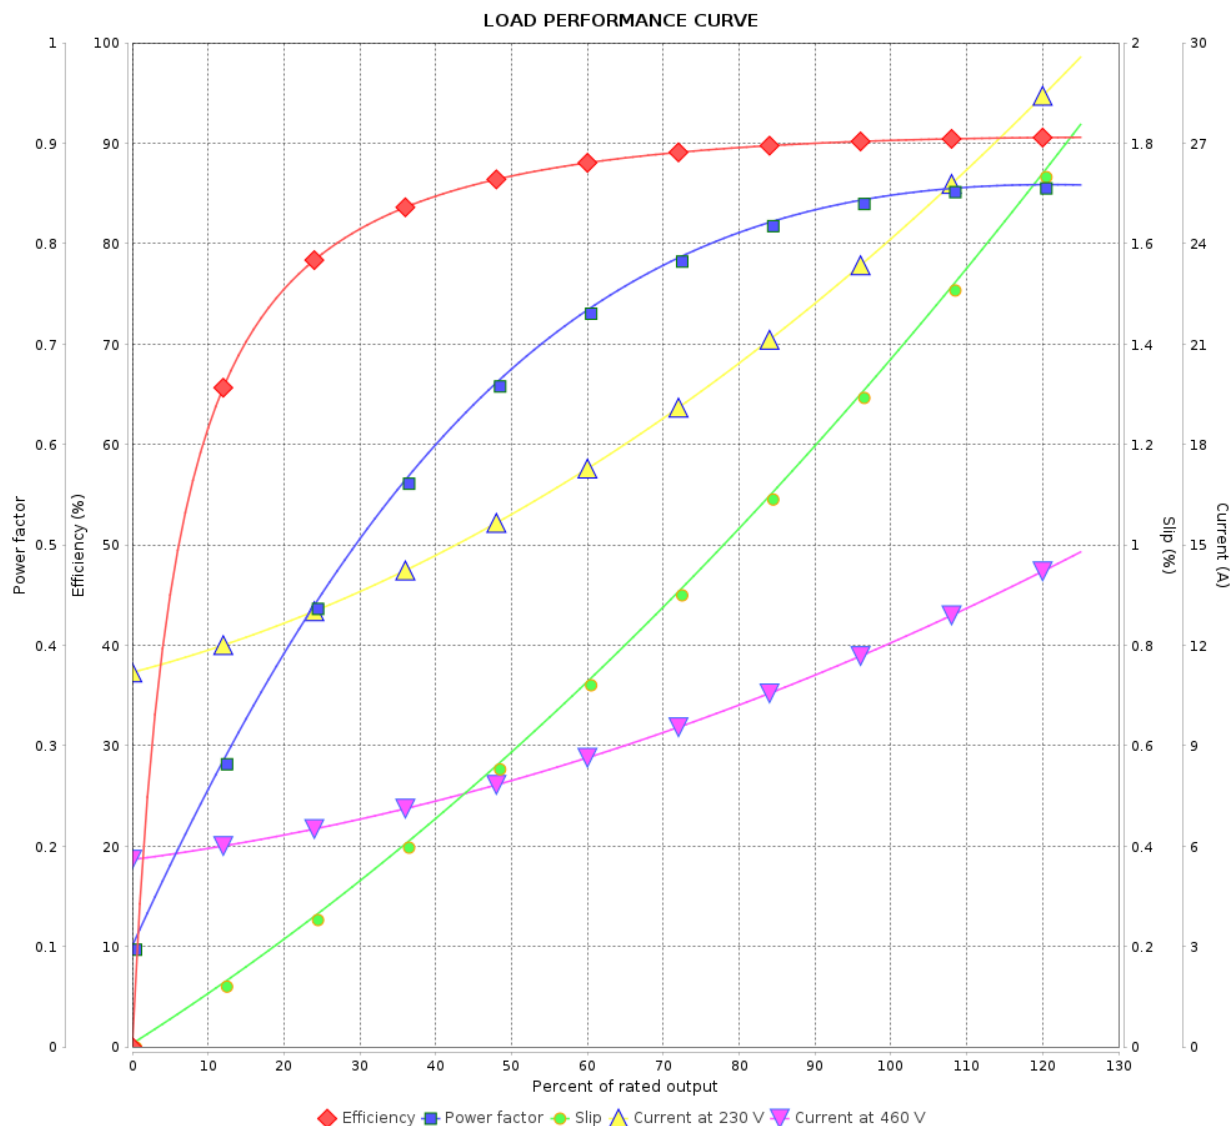

Performance : 230/460 V 60 Hz 2P

Rated current : 24.6/12.3 A
LRC : 9.2
Rated torque : 2.04 kgfm
Locked rotor torque : 280 %
Breakdown torque : 340 %
Rated speed : 3550 rpm

Moment of inertia (J) : 0.0252 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 2	Revision
Checked by					
Date	20/08/2026				