DATA SHEET

Single Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: W01 - TEFC Farm Duty - Standard Efficiency
Product code	: 18995573

Frame	: 56H	Locked rotor time	: 8 s (hot) 14 s (cold)
Output	: 1.5 HP (1.1 kW)	Duty cycle	: S1
Poles	: 4	Ambient temperature	: -20 °C to +40 °C
Frequency	: 60 Hz	Altitude	: 1000 m.a.s.l
Rated voltage	: 115/230 V	Protection degree	: IP55
Rated current	: 14.8/7.40 A	Cooling method	: IC411 - TEFC
L. R. Amperes	: 118/59.2 A	Mounting	: F-1/B3R(D)
LRC	: 8.0 Code L	Rotation[1]	: Both
No load current	: 8.60/4.30 A	Noise level[2]	: 54 dB(A)
Rated speed	: 1745 rpm	Starting method	: Direct On Line
Slip	: 3.06 %	Approx. weight[3]	: 19.5 kg
Rated torque	: 0.624 kgfm	Design	: L
Locked rotor torque	: 250 %		
Pull up torque	: 210 %		
Breakdown torque	: 270 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.006 kgm²		

Output	Start	50%	75%	100%
Efficiency (%)	-	69.0	75.0	77.0
Power Factor	0.82	0.68	0.78	0.83

	Drive end	Non drive end
Bearing type	6204-2RS	6202-2RS
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	MOBIL POLYREX EM	

Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -

Foundation loads

Max. traction	: -
Max. compression	: -

Notes:

Standards

Specification	: MG1 - Part 10	Vibration	:
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Performed	Checked	Date
				2026/10/23


Performed by				
Checked by			Page	Revision
Date	2026/10/23		1/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage

Customer	:
Product line	: W01 - TEFC Farm Duty - Standard Efficiency
Product code	: 18995573

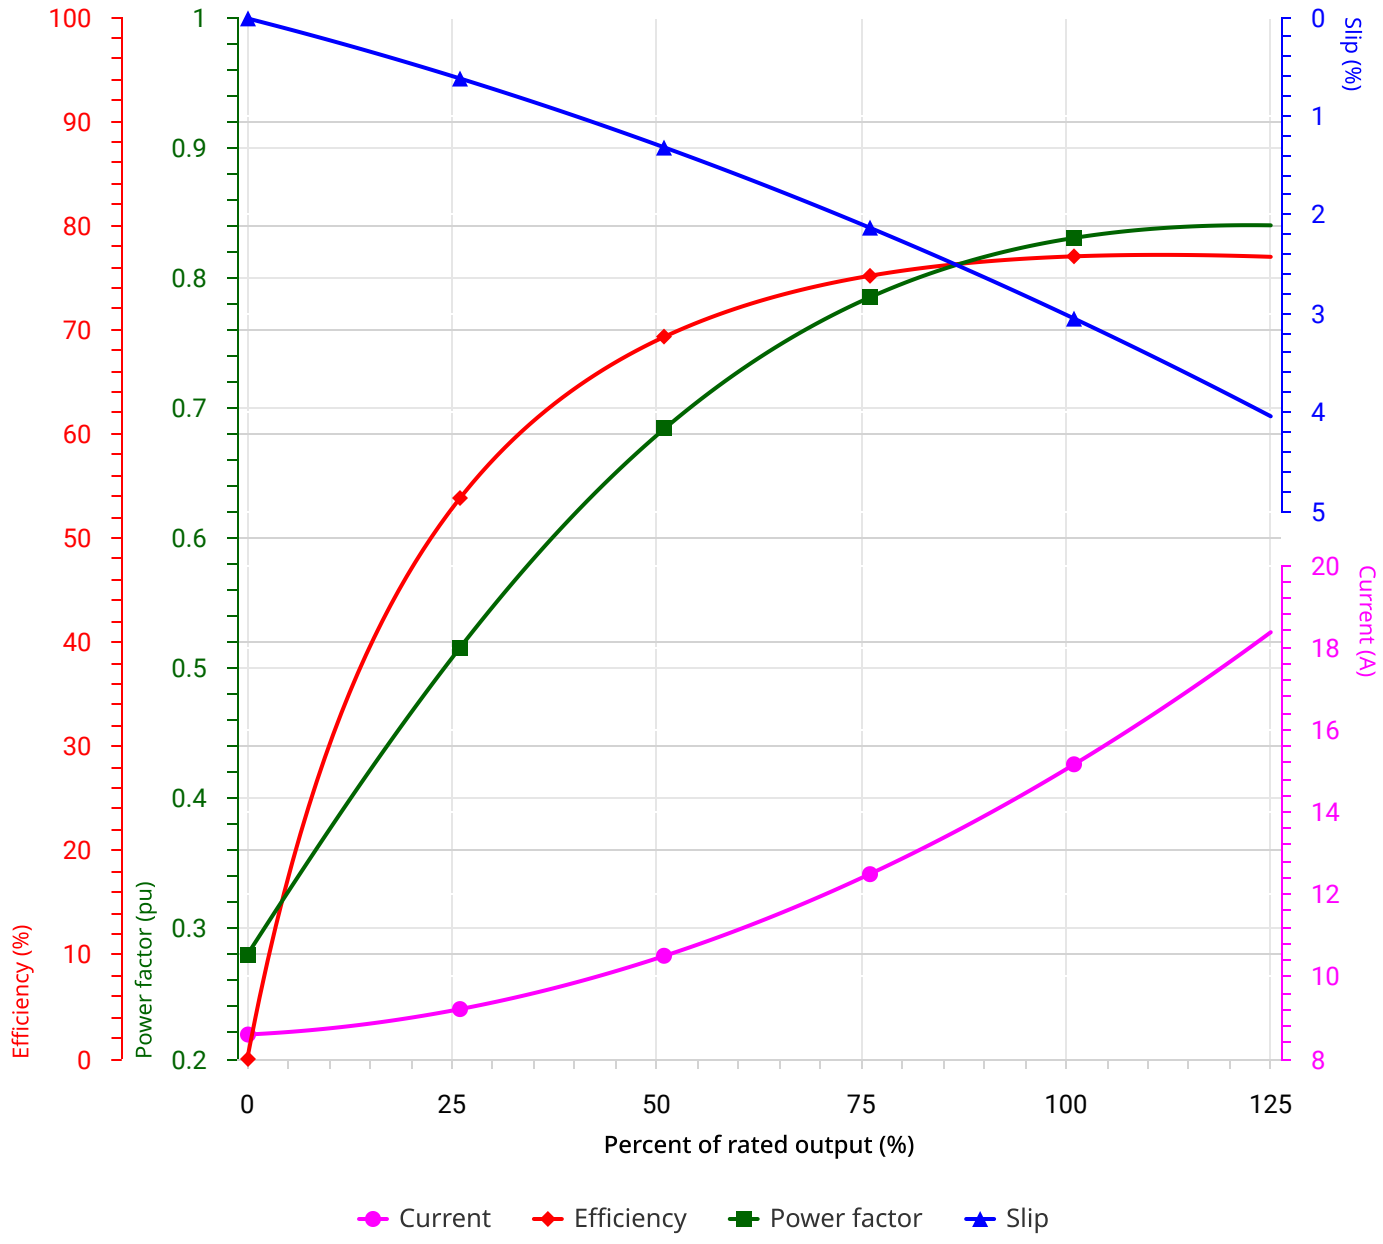

Performance	: 1.5 HP (1.1 kW) 115/230V 60Hz 4P 56H

Rated current	: 14.8/7.40 A	Moment of inertia (J)	: 0.006 kgm²
LRC	: 8.0 Code L	Duty cycle	: Cont.(S1)
Rated torque	: 0.624 kgfm	Insulation class	: F
Locked rotor torque	: 250 %	Service factor	: 1.15
Breakdown torque	: 270 %	Temperature rise	: 80 K
Rated speed	: 1745 rpm	Design	: L

Rev.	Changes Summary	Performed	Checked	Date
				2026/10/23

Performed by				
Checked by			Page	Revision
Date	2026/10/23		2/2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.