

UNLESS OTHERWISE SPECIFIED DIMENSIONS WITHOUT TOLERANCES ARE REFERENCE ONLY


NOTES

1. CONDUIT BOX IS SUPPLIED AS UNASSEMBLED ITEM WITH MOTOR

LEADS

24" +2-0 FROM CONDUIT HUB WITH .44 STRIPPING

EXTERNAL CONNECTIONS

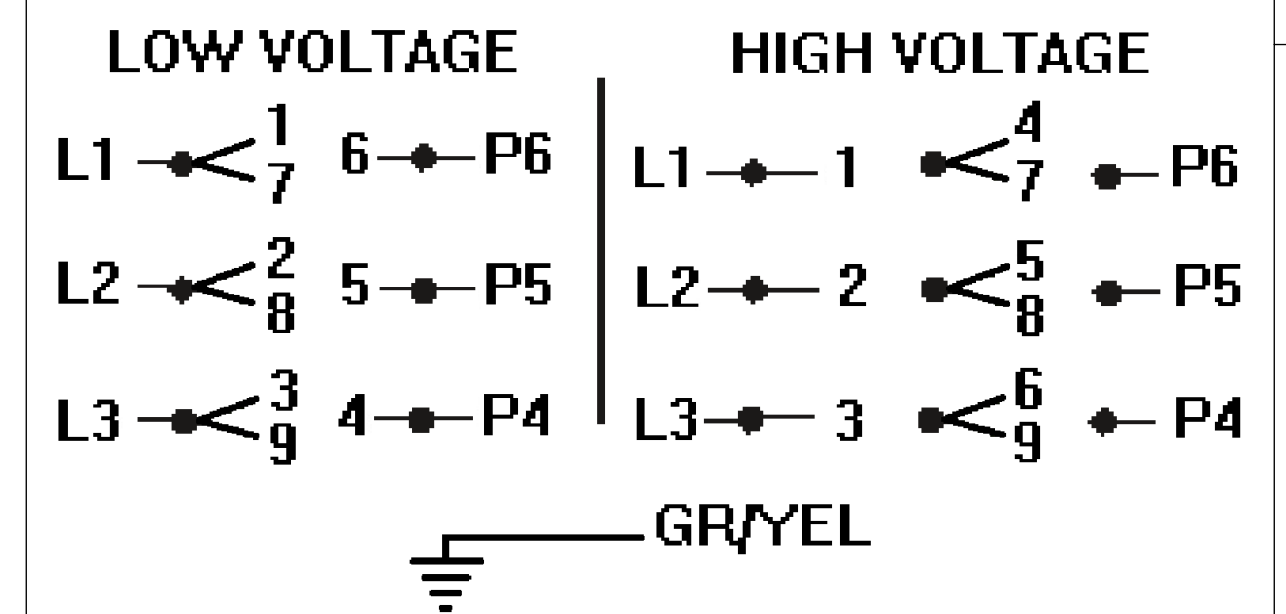

MOTOR DATA

TYPE		POLY		SHAFT MATERIAL		CRS		CUSTOMER NAME		WEG	
HZ		60		HZ		50		FRAME		56	
VOLTS		208-230/460		VOLTS		190/380		ENCLOSURE		XPFC	
HP		1.5		SF		1.0		PAINT		GRAY	
RPM		3450		RPM		2875		VIEWING LEAD END		MOTOR ROTATION	
F.L. AMPS		4.2/2.1		F.L. AMPS		3.6/1.8		ENVIRONMENT		NORMAL	
S.F. AMPS				S.F. AMPS				BEARINGS		BALL	
TIME RATE		CONT		MAX AMB		50		I.P. CODE		IP55	
KVA CODE		J		INS CLASS		F		END CAP		N/R	
								NEMA NOM. EFF.		84.0%	
								TEMP CODE		T3B	
								ASSEMBLY VOLTAGE		HIGH	
								THERMAL PROTECTION TYPE			
								MOUNTING POSITION		HORIZONTAL	
								WINDING AND TEST SPEC		330290	
								DRAWN: BKG		08/18/16	

MOTOR IS LISTED FOR HAZARDOUS LOCATIONS

ECN	REV	CHANGE DESCRIPTION	DATE/INITIALS
-	02	UPDATED FORMATTING AND ASSEMBLY ROTATION TO CW	09/12/24 IT

THE INFORMATION DISCLOSED HEREIN INCLUDES PROPRIETARY RIGHTS OF WEG. ANY REPRODUCTION OR TRANSFERRAL OF INFORMATION FROM THIS DOCUMENT IS FORBIDDEN WITHOUT PRIOR CONSENT.

SIZE	D	DWG NO.	10008234456
SCALE: 1:1	DO NOT SCALE DRAWING	SHEET 1 OF 1	

F
E
D
C
B
A

F
E
D
C
B
A

10008234456