

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer	:			
Product line	: JM Pump NEMA Premium Efficiency Three-Phase	Product code : 13374124		
Frame	: 143/5JM	Cooling method : IC01 - ODP		
Insulation class	: F	Mounting : W-6		
Duty cycle	: Cont.(S1)	Rotation ¹ : Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method : Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³ : 19.6 kg		
Design	: B	Moment of inertia (J) : 0.0060 kgm ²		
Output [HP]		1.5		
Poles		4		
Frequency [Hz]		60		
Rated voltage [V]		575		
Rated current [A]		1.66		
L. R. Amperes [A]		14.4		
LRC [A]		8.7x(Code L)		
No load current [A]		0.958		
Rated speed [RPM]		1760		
Slip [%]		2.22		
Rated torque [kgfm]		0.619		
Locked rotor torque [%]		280		
Breakdown torque [%]		330		
Service factor		1.15		
Temperature rise		80 K		
Locked rotor time		27s (cold) 15s (hot)		
Noise level ²		52.0 dB(A)		
Efficiency (%)	25%			
	50%	84.0		
	75%	86.5		
	100%	86.5		
Power Factor	25%			
	50%	0.56		
	75%	0.69		
	100%	0.77		
Bearing type	: <u>Drive end</u> 6206 ZZ <u>Non drive end</u> 6203 ZZ	Foundation loads		
Sealing	: Without Without Bearing Seal Bearing Seal	Max. traction : 48 kgf Max. compression : 68 kgf		
Lubrication interval	: - -			
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	16/05/2022		1 / 2	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JM Pump NEMA Premium
Efficiency Three-Phase

Product code : 13374124

LOAD PERFORMANCE CURVE

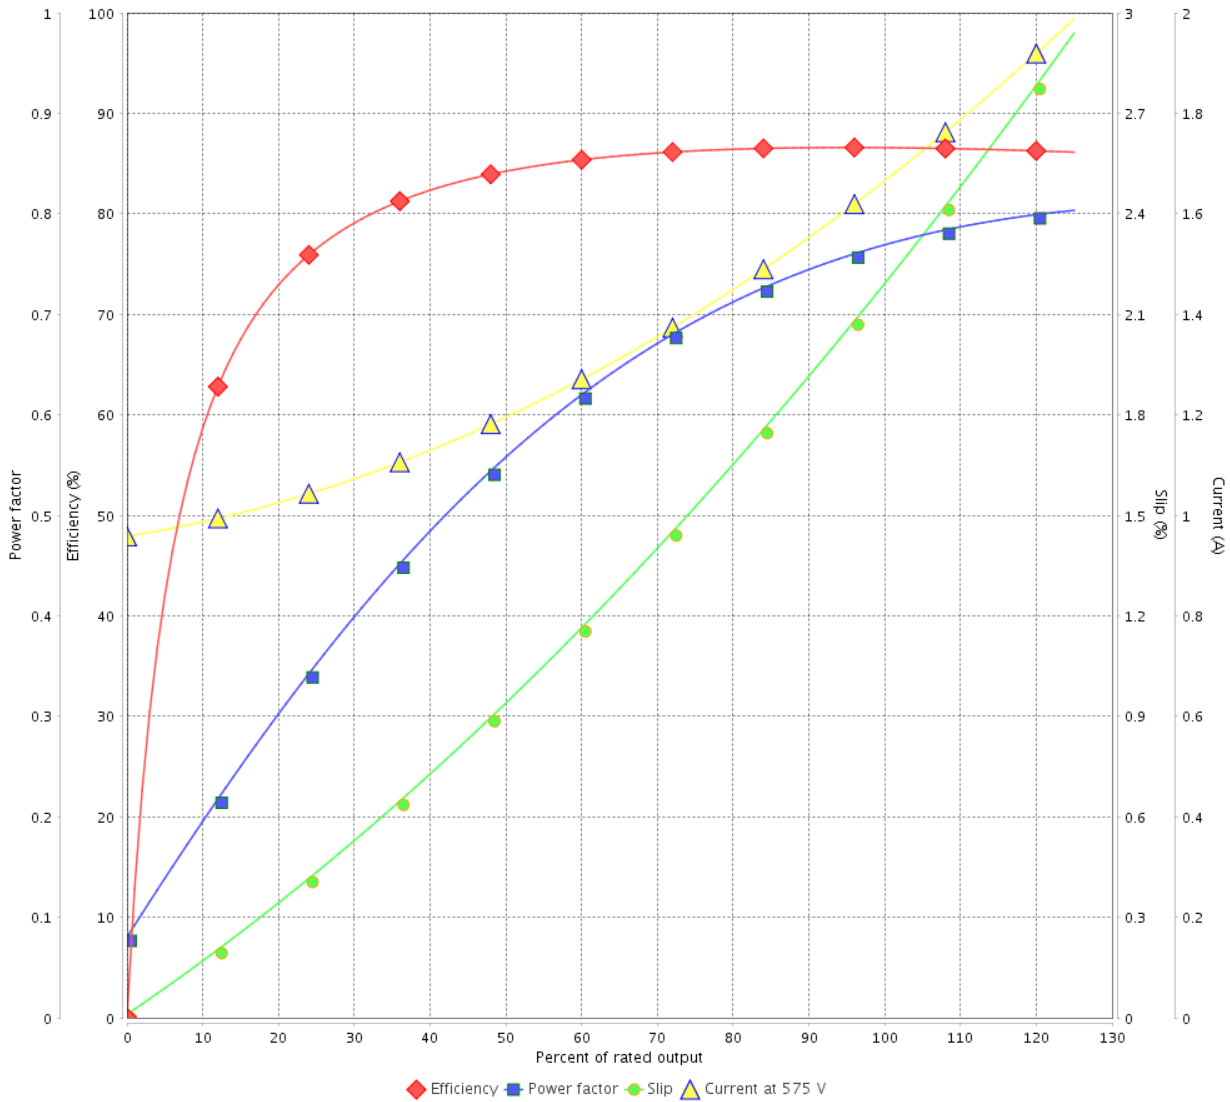

Performance : 575 V 60 Hz 4P

Rated current : 1.66 A
LRC : 8.7
Rated torque : 0.619 kgfm
Locked rotor torque : 280 %
Breakdown torque : 330 %
Rated speed : 1760 rpm

Moment of inertia (J) : 0.0060 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	16/05/2022			