

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer	:			
Product line	: Jet Pump - J type Single-Phase	Product code : 14313605		
Frame	: 56J	Cooling method : IC01 - ODP		
Insulation class	: F	Mounting : F-1		
Duty cycle	: Cont.(S1)	Rotation ¹ : CCW		
Ambient temperature	: -20°C to +40°C	Starting method : Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³ : 12.2 kg		
Design	: N	Moment of inertia (J) : 0.0020 kgm ²		
Output [HP]		1		
Poles		2		
Frequency [Hz]		60		
Rated voltage [V]		115/208-230		
Rated current [A]		12.8/7.08-6.40		
L. R. Amperes [A]		88.3/48.9-44.2		
LRC [A]		6.9x(Code M)		
No load current [A]		8.40/3.62-4.20		
Rated speed [RPM]		3500		
Slip [%]		2.78		
Rated torque [kgfm]		0.207		
Locked rotor torque [%]		260		
Breakdown torque [%]		280		
Service factor				
Temperature rise		80 K		
Locked rotor time		14s (cold) 8s (hot)		
Noise level ²		58.0 dB(A)		
Efficiency (%)	25%			
	50%	60.0		
	75%	65.0		
	100%	68.0		
Power Factor	25%			
	50%	0.55		
	75%	0.67		
	100%	0.75		
Bearing type	: <u>Drive end</u> 6203 2RS <u>Non drive end</u> 6202 2RS	Foundation loads		
Sealing	: Without Bearing Seal Without Bearing Seal	Max. traction : 12 kgf		
Lubrication interval	: - -	Max. compression : 24 kgf		
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes				
<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>		<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 2	


LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - J type Single-Phase Product code : 14313605

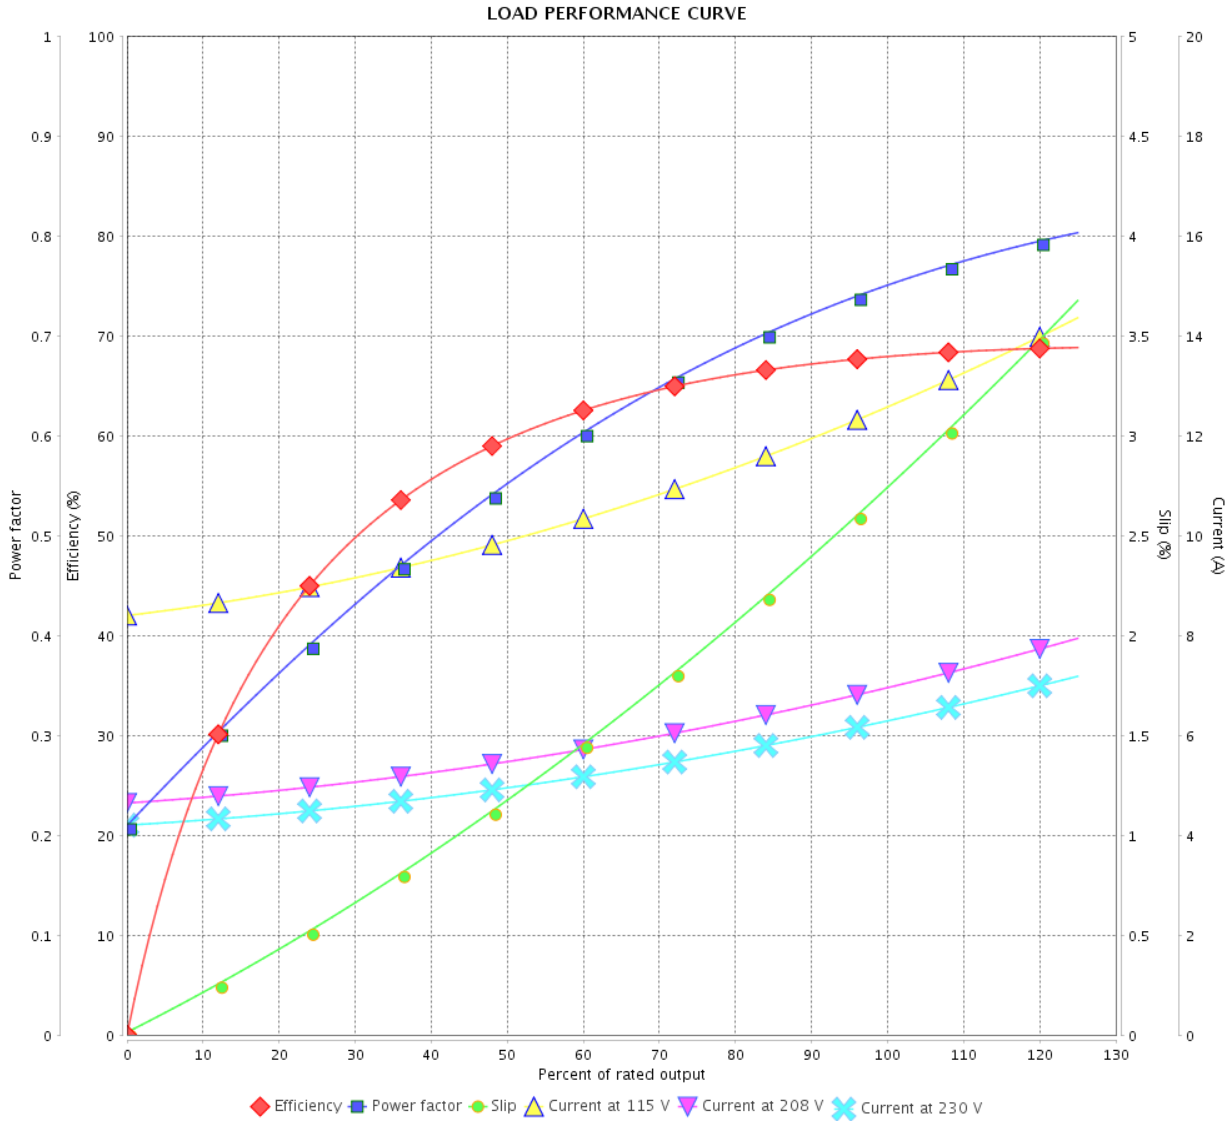

Performance : 115/208-230 V 60 Hz 2P

Rated current	: 12.8/7.08-6.40 A	Moment of inertia (J)	: 0.0020 kgm ²
LRC	: 6.9	Duty cycle	: Cont.(S1)
Rated torque	: 0.207 kgfm	Insulation class	: F
Locked rotor torque	: 260 %	Service factor	:
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 3500 rpm	Design	: N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	17/05/2022			