

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 13601867

Frame	: 447/9TC	Locked rotor time	: 28s (cold) 16s (hot)
Output	: 300 HP (220 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 264 A	Protection degree	: IP55
L. R. Amperes	: 1716 A	Cooling method	: IC411 - TEFC
LRC	: 6.5x(Code G)	Mounting	: F-1
No load current	: 84.0 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1780 rpm	Noise level ²	: 75.0 dB(A)
Slip	: 1.11 %	Starting method	: Direct On Line
Rated torque	: 122 kgfm	Approx. weight ³	: 1295 kg
Locked rotor torque	: 250 %		
Breakdown torque	: 250 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 3.77 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	95.8	96.2	96.2	Max. traction	: 2027 kgf
Power Factor	0.77	0.84	0.87	Max. compression	: 3322 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
4.5	3.3	2.7	2.5	1.5	1.1	0.6

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6322 C3	6319 C3
Sealing	:	Viton Oil Seal	Viton Oil Seal
Lubrication interval	:	6000 h	8000 h
Lubricant amount	:	60 g	45 g
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	01/09/2024			
			Page	Revision
			1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 13601867

LOAD PERFORMANCE CURVE

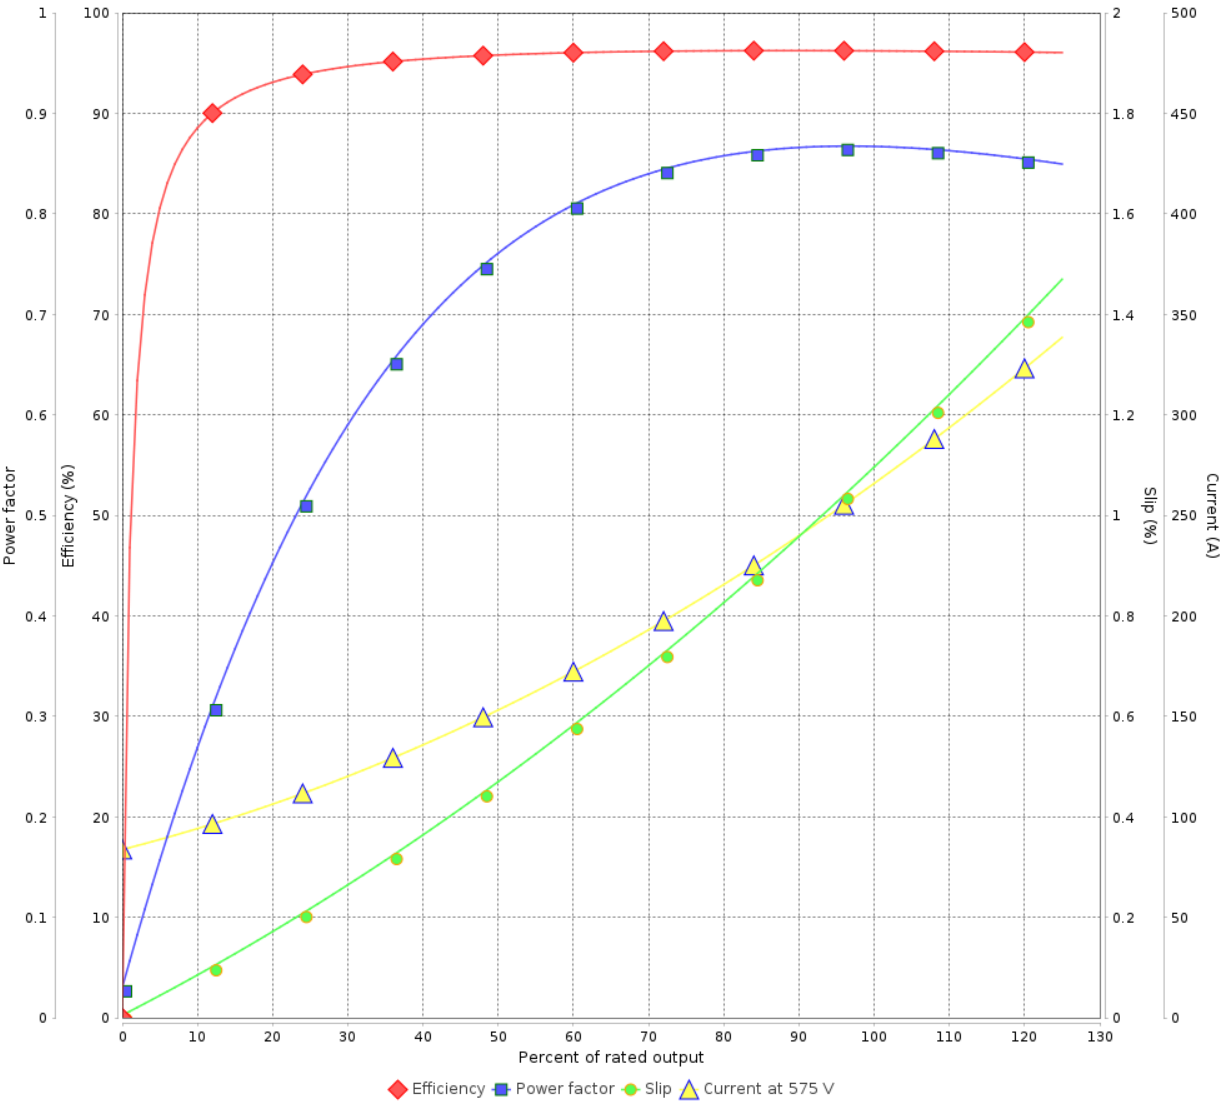

Performance : 575 V 60 Hz 4P			
Rated current	: 264 A	Moment of inertia (J)	: 3.77 kgm ²
LRC	: 6.5	Duty cycle	: Cont.(S1)
Rated torque	: 122 kgfm	Insulation class	: F
Locked rotor torque	: 250 %	Service factor	: 1.15
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 1780 rpm	Design	: B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 2	Revision
Checked by					
Date	01/09/2024				