

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11164877

Frame	: 586/7T	Locked rotor time	: 34s (cold) 19s (hot)
Output	: 300 HP (220 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 270 A	Protection degree	: IP55
L. R. Amperes	: 1758 A	Cooling method	: IC411 - TEFC
LRC	: 6.5x(Code G)	Mounting	: F-1
No load current	: 92.0 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 1789 rpm	Noise level <sup>2</sup>	: 81.0 dB(A)
Slip	: 0.61 %	Starting method	: Direct On Line
Rated torque	: 122 kgfm	Approx. weight <sup>3</sup>	: 1419 kg
Locked rotor torque	: 210 %		
Breakdown torque	: 229 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 6.80 kgm <sup>2</sup>		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	95.0	96.0	96.2	Max. traction	: 1207 kgf
Power Factor	0.75	0.82	0.85	Max. compression	: 2625 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
4.2	3.0	2.4	2.6	1.6	1.2	0.7

	<u>Drive end</u>	<u>Non drive end</u>
Bearing type	: NU-322 C3	: 6319 C3
Sealing	: Taconite Labyrinth	: Taconite Labyrinth
Lubrication interval	: 4000 h	: 8000 h
Lubricant amount	: 60 g	: 45 g
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	21/10/2024		Page 1 / 3	Revision

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Space heater information

Voltage: 200 - 240 V

Rev.	Changes Summary		Performed	Checked	Date
Performed by			Page 2 / 3		Revision
Checked by					
Date	21/10/2024				

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency  
Three-Phase

Product code : 11164877

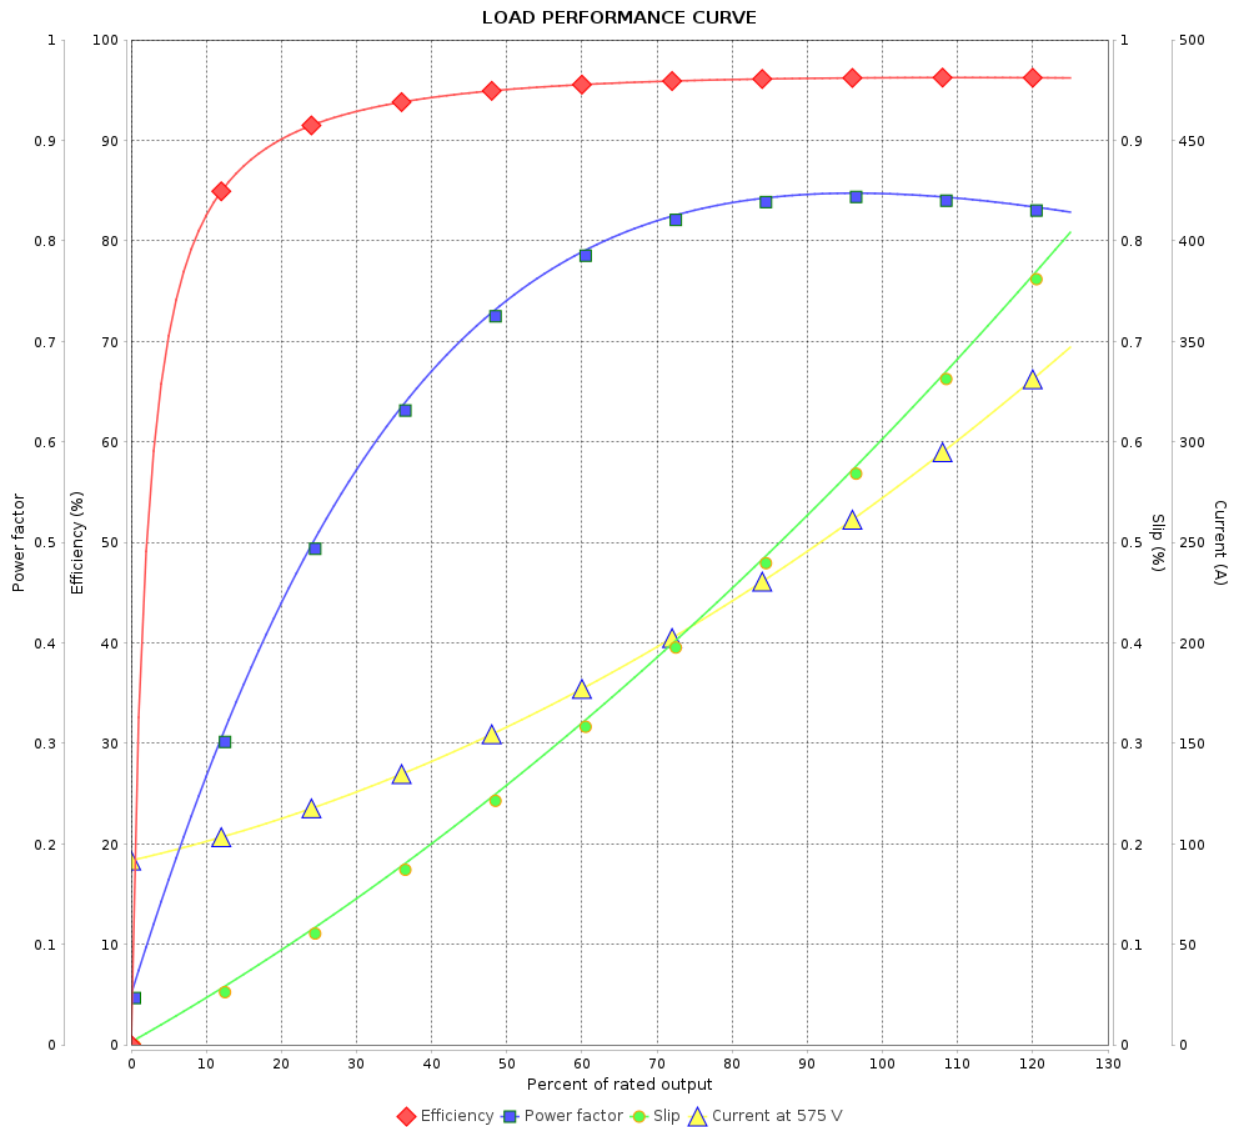

Performance : 575 V 60 Hz 4P

Rated current	: 270 A	Moment of inertia (J)	: 6.80 kgm <sup>2</sup>
LRC	: 6.5	Duty cycle	: Cont.(S1)
Rated torque	: 122 kgfm	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.15
Breakdown torque	: 229 %	Temperature rise	: 80 K
Rated speed	: 1789 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	21/10/2024		Page 3 / 3	Revision