

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 14682921

Frame	: 447/9T	Locked rotor time	: 18s (cold) 10s (hot)
Output	: 300 HP (220 kW)	Temperature rise	: 80 K
Poles	: 6	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 285 A	Protection degree	: IP55
L. R. Amperes	: 2193 A	Cooling method	: IC411 - TEFC
LRC	: 7.7x(Code J)	Mounting	: F-1
No load current	: 136 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1189 rpm	Noise level ²	: 70.0 dB(A)
Slip	: 0.92 %	Starting method	: Direct On Line
Rated torque	: 183 kgfm	Approx. weight ³	: 1379 kg
Locked rotor torque	: 270 %		
Breakdown torque	: 300 %		
Insulation class	: F		
Service factor	: 1.00		
Moment of inertia (J)	: 6.09 kgm ²		
Design	: A		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	95.4	95.8	95.8	Max. traction	: 4116 kgf
Power Factor	0.63	0.75	0.81	Max. compression	: 5495 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
5.2	4.3	3.7	3.0	2.3	1.8	1.1

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6322 C3	6319 C3
Sealing	:	WSeal	WSeal
Lubrication interval	:	11000 h	13000 h
Lubricant amount	:	60 g	45 g
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2		Revision
Checked by				
Date	29/10/2024			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____


Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 14682921

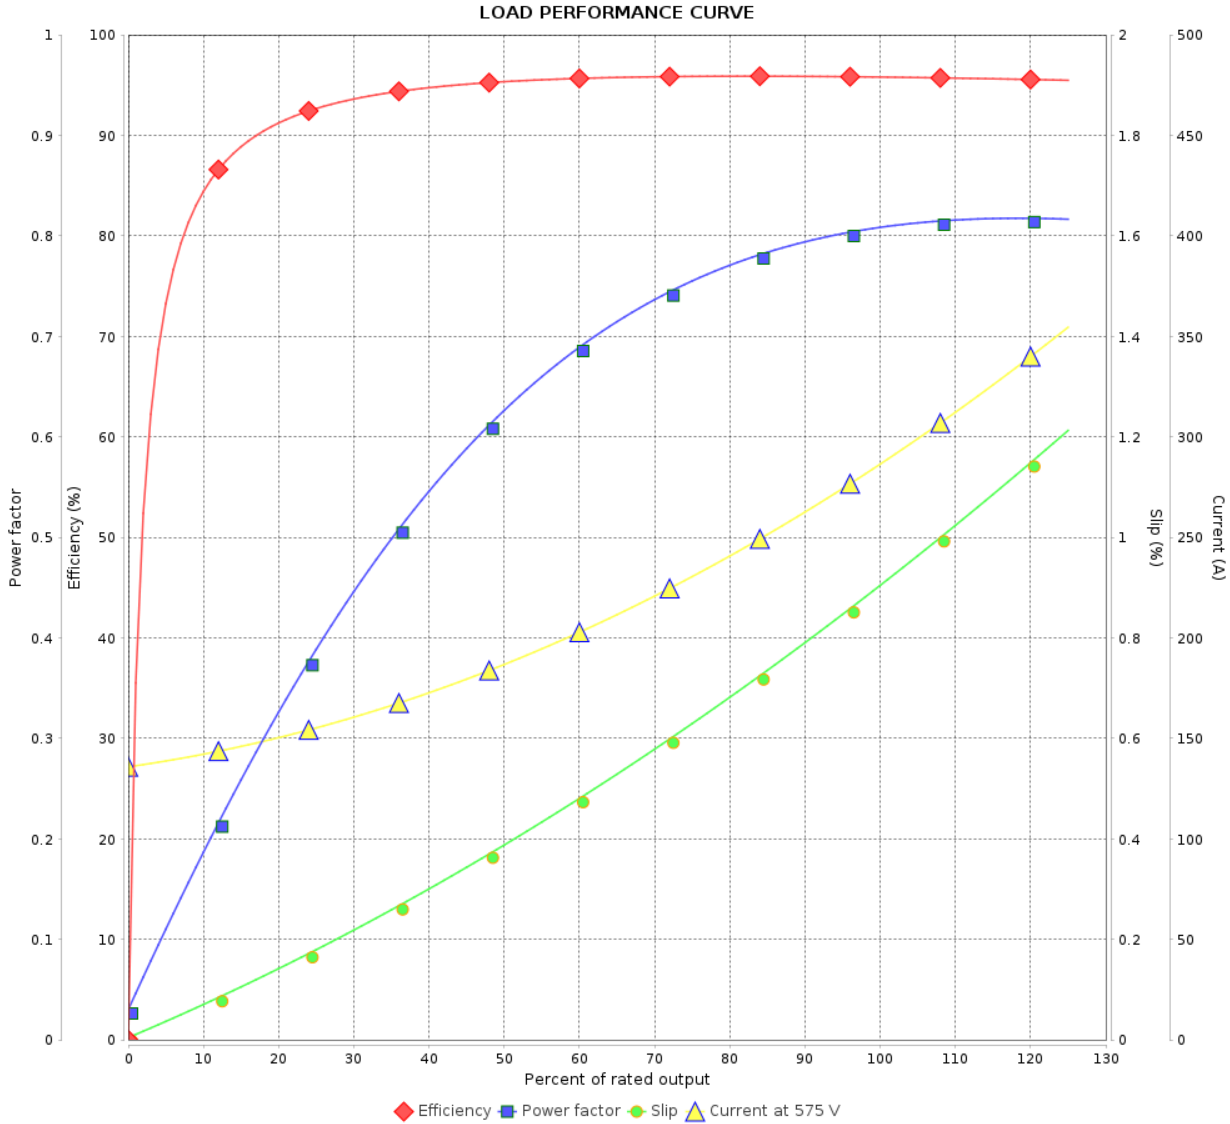

Performance : 575 V 60 Hz 6P

Rated current	: 285 A	Moment of inertia (J)	: 6.09 kgm ²
LRC	: 7.7	Duty cycle	: Cont.(S1)
Rated torque	: 183 kgfm	Insulation class	: F
Locked rotor torque	: 270 %	Service factor	: 1.00
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 1189 rpm	Design	: A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	29/10/2024			

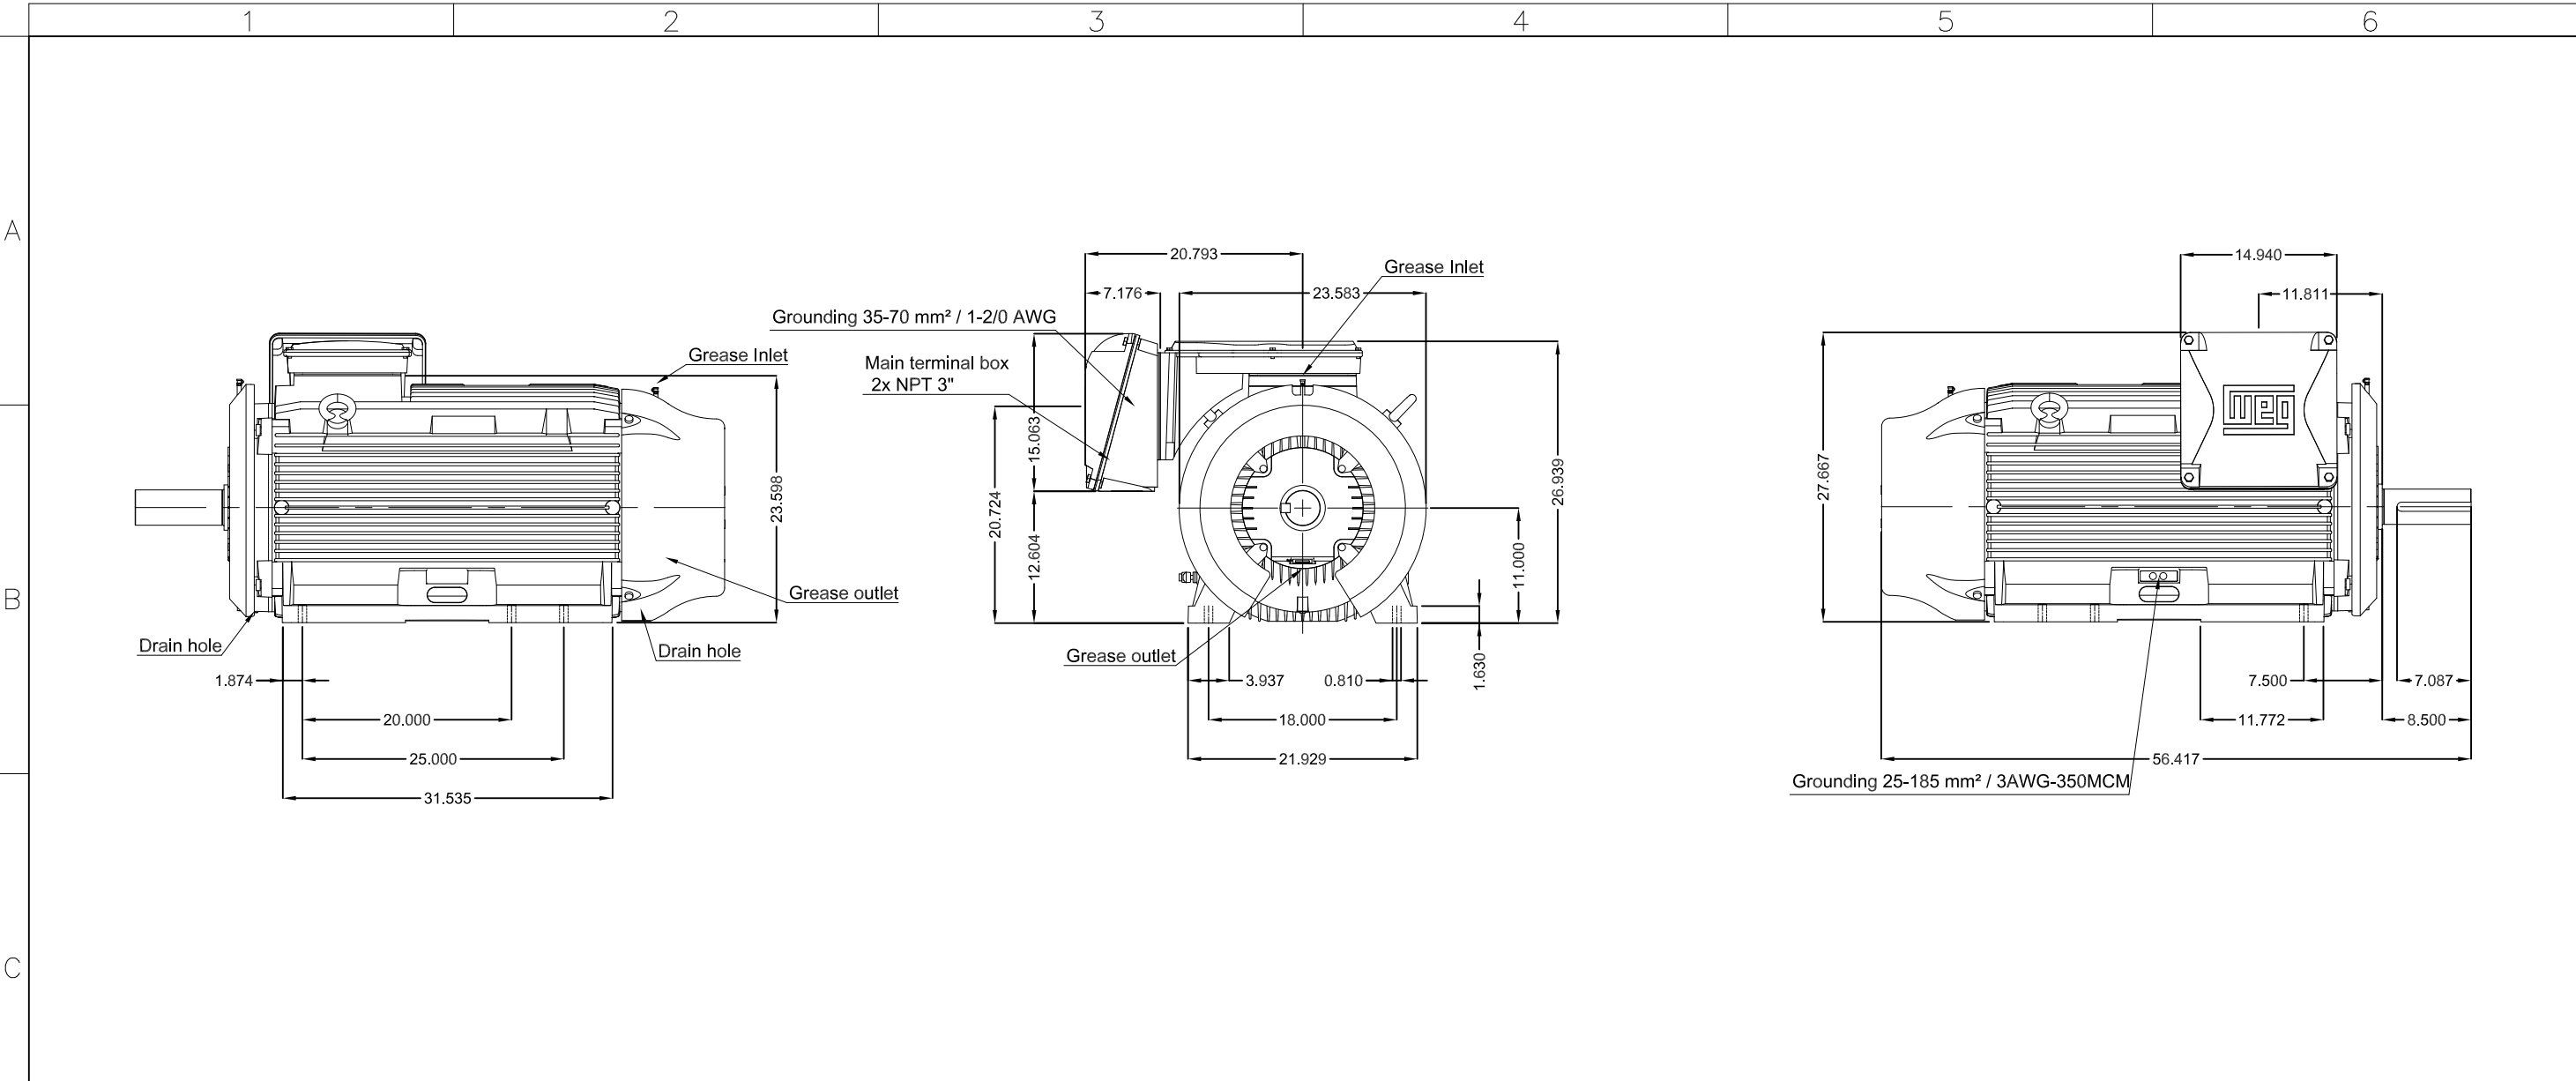

D

E

Drive-End Air Deflector
Color RAL 5009
Painting plan 203A
Mounting NEMA F-1
Mounting B3R(D)



300 HP		06 Poles		60 Hz		A
ECM	LOC	SUMMARY OF MODIFICATIONS			HYBRISUSER	00
EXECUTED	HYBRISUSER	THREE PH. MOTOR W22 NEMA PREM. EFF.	EXECUTED	CHECKED	RELEASED	DATE
CHECKED		FRAME 447/9T IP55 TEFC				
RELEASED						
REL. DATE						

		PREVIEW WDD 00 SHEET /
--	--	---------------------------------------