DATA SHEET
Single Phase Induction Motor - Squirrel Cage

Customer	: V.J. PAMENSKY CANADA INC.
Product line	: W01 - TEFC - Premium Efficiency (DOE) Jet Pump - Forma C
Product code	: 18379120

Frame	: 56C	Locked rotor time	: 21 s (hot) 38 s (cold)
Output	: 0.75 HP (0.55 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 115/208-230 V	Altitude	: 3280 ft
Rated current	: 6.54/3.75-3.27 A	Protection degree	: IP55
L. R. Amperes	: 54.3/31.1-27.1 A	Cooling method	: IC411 - TEFC
LRC	: 8.3	Mounting	: F-1/B14R(D)
No load current	: 2.30/0.992-1.15 A	Rotation[1]	: Counter clockwise
Rated speed	: 3510 rpm	Noise level[2]	: 68.0 dB(A)
Slip	: 2.50 %	Vibration class	: A
Rated torque	: 1.11 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 290 %	Approx. weight[3]	: 28.7 lb
Pull up torque	: 245 %	Painting plan	: 207N
Breakdown torque	: 300 %	Color	: MUNSELL N 1 - MATTE
Insulation class	: F	Design	: N
Service factor	: 1.15		
Moment of inertia (J)	: 0.0475 sq.ft.lb		

Output	50%	75%	100%
Efficiency (%)	64.0	72.0	77.0
Power Factor	0.94	0.94	0.95

	Drive end	Non drive end
Bearing type #1	6203-2RS	6202-2RS
Bearing type #2	-	-
Lubrication interval	-	-
Lubricant amount #1	-	-
Lubricant amount #2	-	-
Lubricant type	MOBIL POLYREX EM	

Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -
Foundation loads	
Max. traction	: -
Max. compression	: -

Notes
See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Rev.	Checked	Date

Performed by	farazq		1866277694	
Checked by	AUTOMATICO		Page	Rev.
Date	26/06/2026		1 / 2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

DATA SHEET
Single Phase Induction Motor - Squirrel Cage

Customer	: V.J. PAMENSKY CANADA INC.
Product line	: W01 - TEFC - Premium Efficiency (DOE) Jet Pump - Forma C
Product code	: 18379120

Thermal protection ID	Application	Type	Quantity	Sensing Temperature

Notes

Standards				
	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		


This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Rev.	Checked	Date


Performed by	farazq		1866277694	
Checked by	AUTOMATICO		Page	Rev.
Date	26/06/2026		2 / 2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

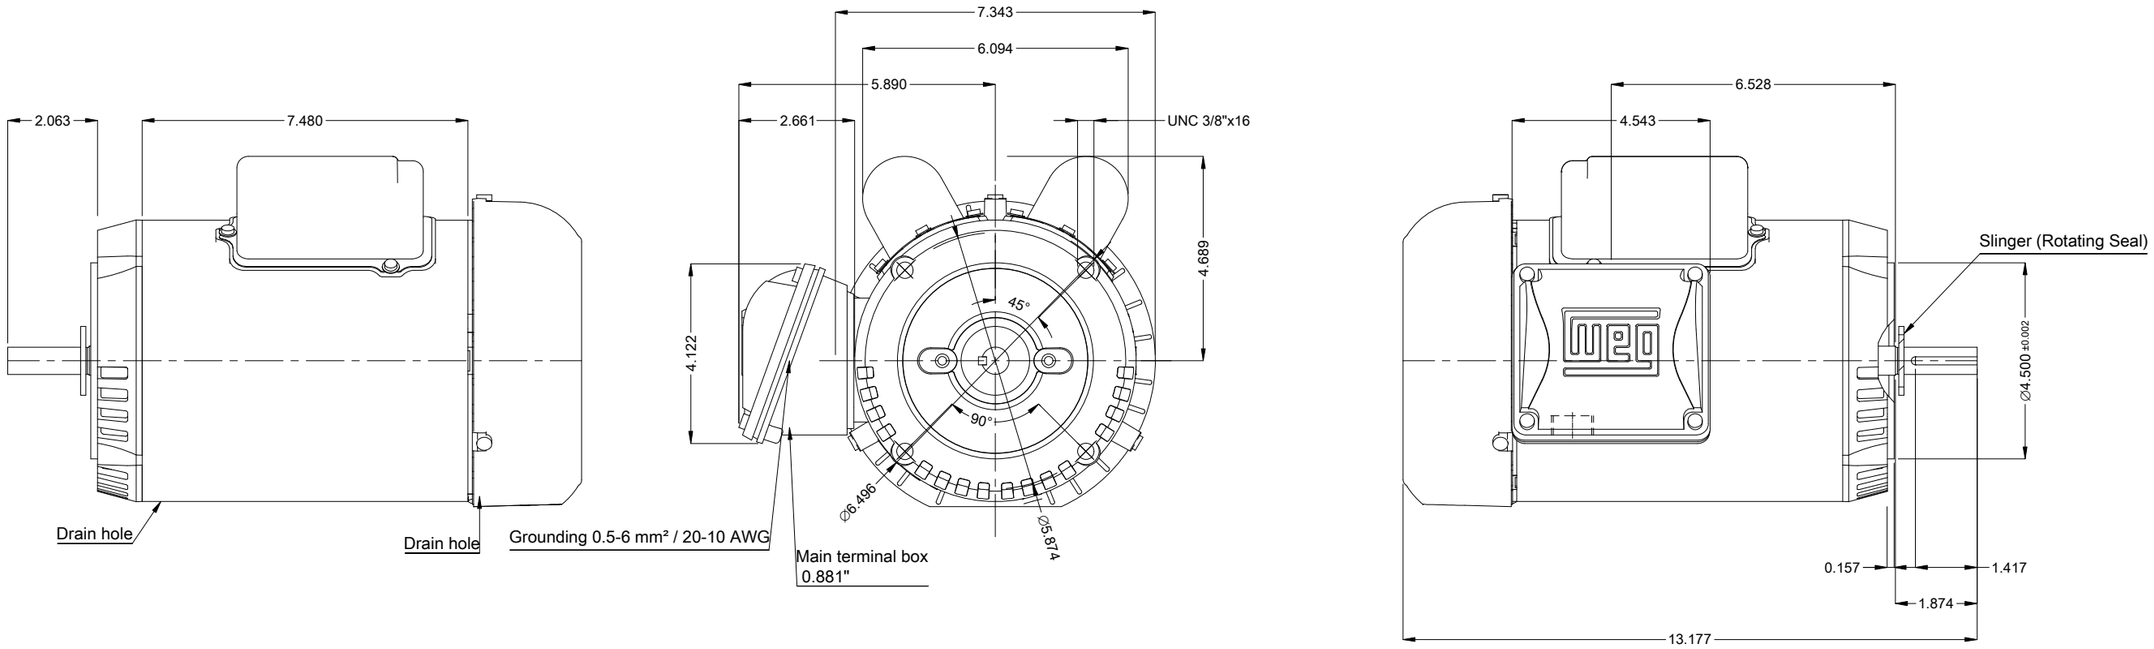

Shaft material - stainless steel AISI 304	
Fan cover - steel plate	
Color Munsell N 1 matte black	
Painting plan 207N	
Mounting MARKET F-1/B14R(D)	
Mounting F-1/B14R(D)	

DE Shaft End



0.75 HP 02 Poles 60 Hz — A

Scale 2 : 7

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER
CHECKED	
RELEASED	
REL. DATE	

SINGLE PH. MOTOR ROLLED STEEL JET PUMP KEYED PREM. EFF
FRAME 56C IP55 TEFC

PREVIEW

WDD 00

SHEET 1 / 1

Dimensions in inches

A3

WEG's property. Forbidden reproduction without previous authorization.