

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line		: Saw Arbor Motor Standard Efficiency Three-Phase		Product code : 14984959	
Frame	: 80S/MS	Locked rotor time	: 16s (cold) 9s (hot)		
Output	: 3 HP (2.2 kW)	Temperature rise	: 80 K		
Poles	: 2	Duty cycle	: S6		
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C		
Rated voltage	: 208-230/460 V	Altitude	: 1000 m.a.s.l.		
Rated current	: 9.49-8.58/4.29 A	Protection degree	: IP54		
L. R. Amperes	: 69.3-62.6/31.3 A	Cooling method	: IC411 - TEFC		
LRC	: 7.3	Mounting	: B3R(D)		
No load current	: 4.55-4.11/2.06 A	Rotation ¹	: CW		
Rated speed	: 3500 rpm	Noise level ²	: 62.0 dB(A)		
Slip	: 2.78 %	Starting method	: Direct On Line		
Rated torque	: 0.622 kgfm	Approx. weight ³	: 38.6 kg		
Locked rotor torque	: 330 %				
Breakdown torque	: 370 %				
Insulation class	: F				
Service factor	: 1.15				
Moment of inertia (J)	: 0.0032 kgm ²				
Design	: N				
Output	50%	75%	100%	Foundation loads	
Efficiency (%)	76.0	79.5	80.5	Max. traction : 29 kgf	
Power Factor	0.65	0.75	0.80	Max. compression : 67 kgf	
		<u>Drive end</u>	<u>Non drive end</u>		
Bearing type	:	6307 ZZ	6207 ZZ		
Sealing	:	Without Bearing Seal	Without Bearing Seal		
Lubrication interval	:	-	-		
Lubricant amount	:	-	-		
Lubricant type	:	Mobil Polyrex EM			
Notes					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	29/10/2024			1 / 2	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : Saw Arbor Motor Standard
Efficiency Three-Phase

Product code : 14984959

LOAD PERFORMANCE CURVE


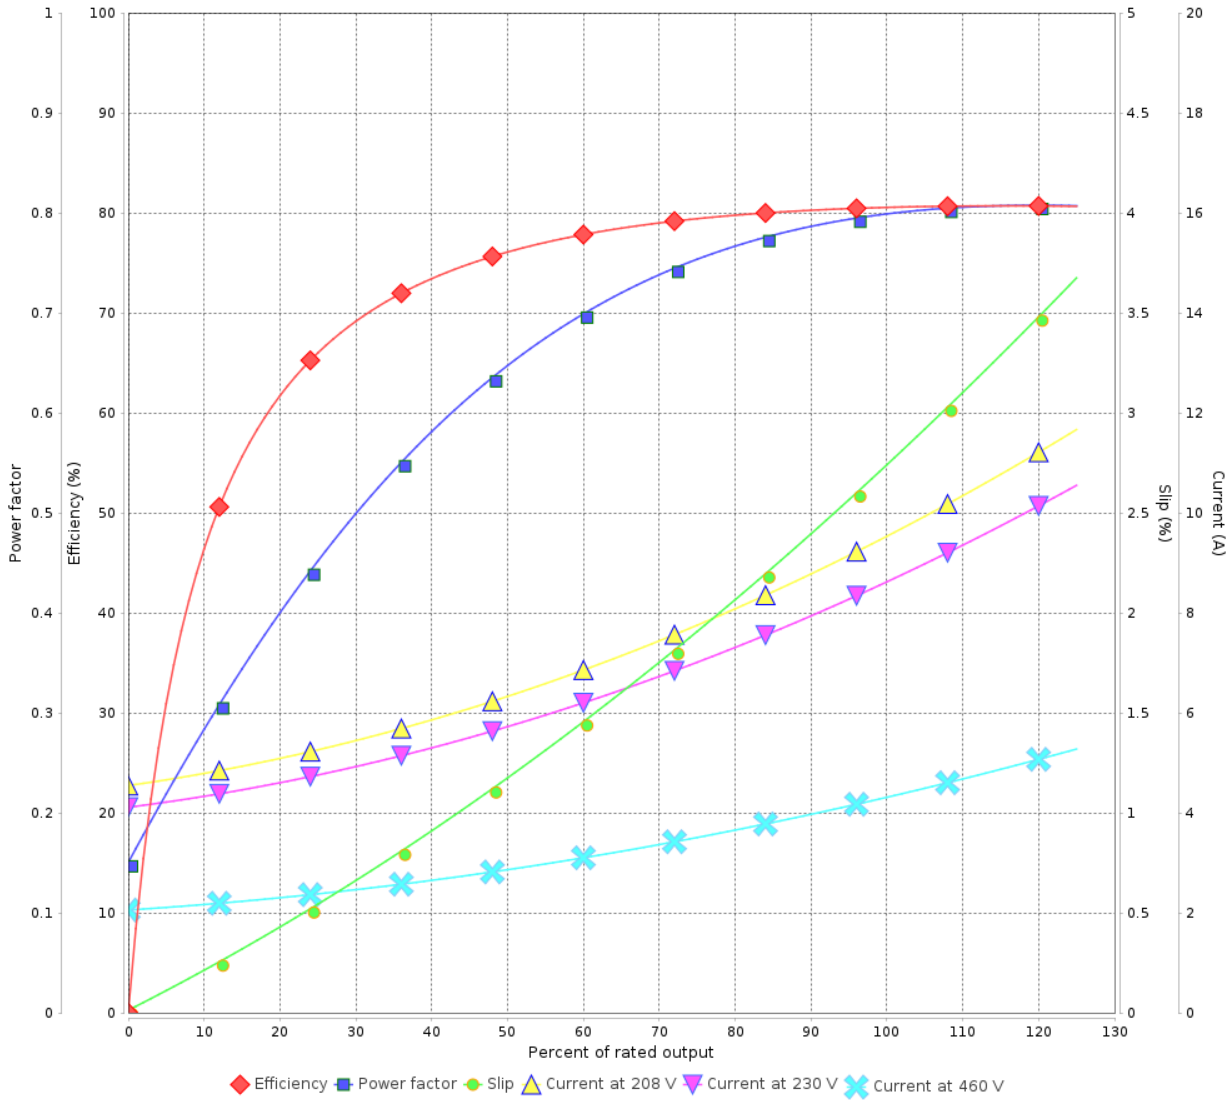


Performance : 208-230/460 V 60 Hz 2P

Rated current : 9.49-8.58/4.29 A
LRC : 7.3
Rated torque : 0.622 kgfm
Locked rotor torque : 330 %
Breakdown torque : 370 %
Rated speed : 3500 rpm

Moment of inertia (J) : 0.0032 kgm²
Duty cycle : S6
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	29/10/2024			

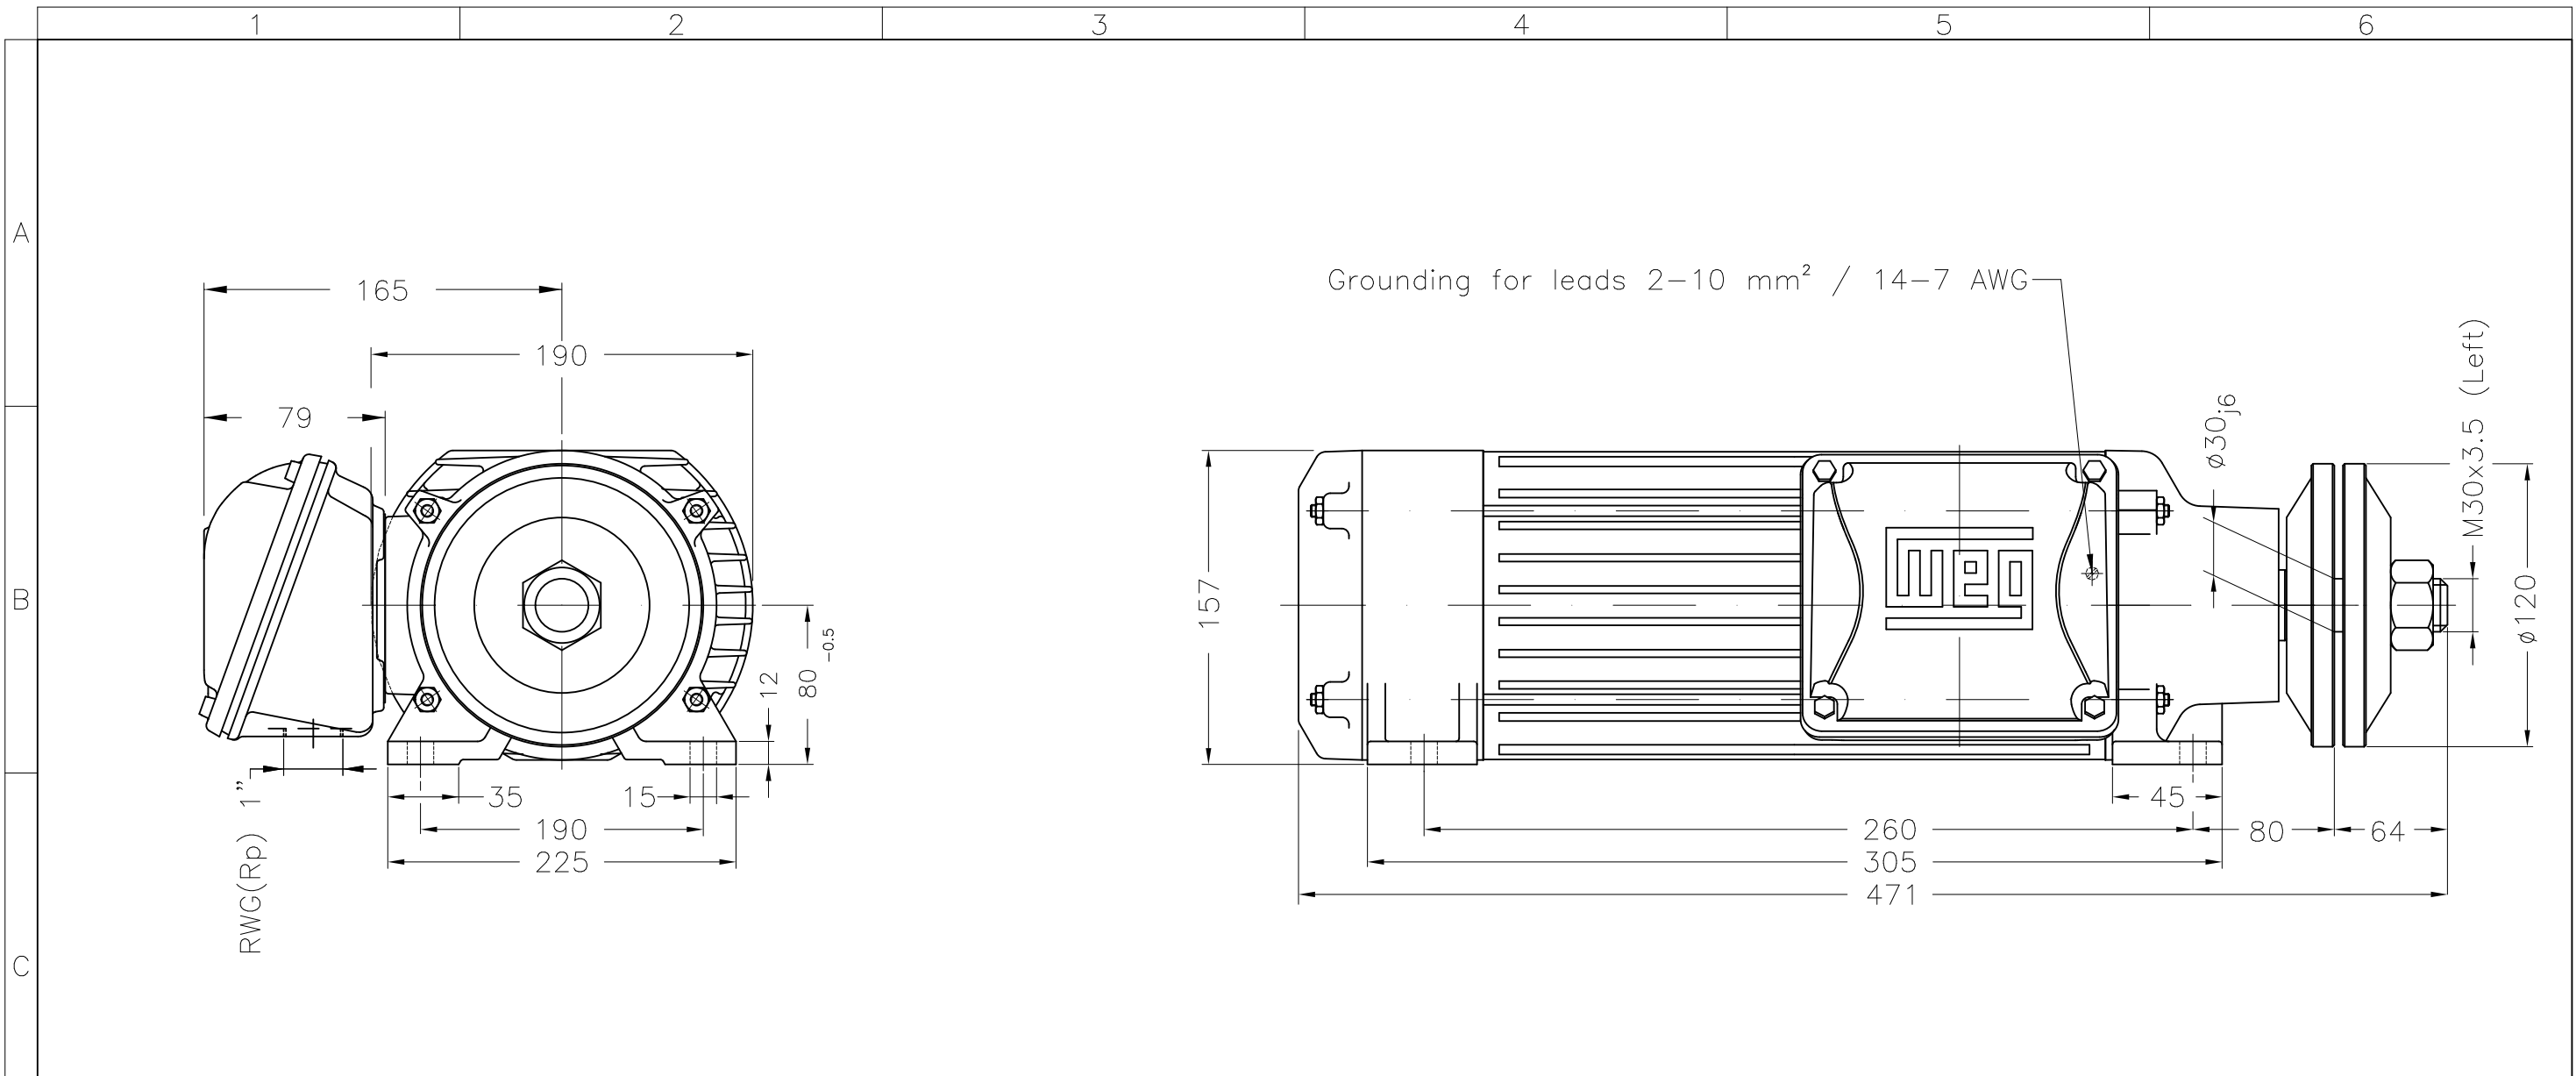

Color RAL 7022		Painting plan 207A		Mounting B3R(D)		3 HP 02 Poles 60 Hz		A	
ECM		LOC		SUMMARY OF MODIFICATIONS		HYBRISUSER		00	
EXECUTED	HYBRISUSER	THREE PH. MOTOR SAW ARBOR MOTOR		EXECUTED		CHECKED	RELEASED	DATE	VER
CHECKED		FRAME 80S/MS IP54 TEFC		EXECUTED		CHECKED	RELEASED	DATE	VER
RELEASED		WMO Jaragua do Sul		Product Engineering		PREVIEW		WDD 00	
REL. DATE		Jaragua do Sul		Product Engineering		SHEET		1 / 1	

Dimensions in mm

