

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 14171846

Frame : 254/6TD	Cooling method : IC411 - TEFC
Insulation class : F	Mounting : F-1
Duty cycle : Cont.(S1)	Rotation ¹ : Both (CW and CCW)
Ambient temperature : -20°C to +40°C	Starting method : Direct On Line
Altitude : 1000 m.a.s.l.	Approx. weight ³ : 137 kg
Protection degree : IP55	Moment of inertia (J) : 0.1104 kgm ²
Design : B	

Output [HP]	15	10	10	10	15	15	15
Poles	4	4	4	4	4	4	4
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	36.0/18.0	15.2	14.8	14.5	21.5	20.5	20.0
L. R. Amperes [A]	230/115	109	115	120	105	111	118
LRC [A]	6.4x(Code G)	7.2x(Code J)	7.8x(Code J)	8.3x(Code K)	4.9x(Code E)	5.4x(Code F)	5.9x(Code G)
No load current [A]	14.0/7.00	6.70	7.10	7.40	7.10	7.60	7.40
Rated speed [RPM]	1768	1475	1480	1480	1455	1460	1465
Slip [%]	1.78	1.67	1.33	1.33	3.00	2.67	2.33
Rated torque [kgfm]	6.16	4.92	4.90	4.90	7.48	7.46	7.43
Locked rotor torque [%]	240	250	280	310	160	200	210
Breakdown torque [%]	260	300	340	370	200	220	240
Service factor	1.25	1.25	1.25	1.25	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K
Locked rotor time	55s (cold) 31s (hot)	72s (cold) 40s (hot)	63s (cold) 35s (hot)	57s (cold) 32s (hot)	41s (cold) 23s (hot)	41s (cold) 23s (hot)	37s (cold) 21s (hot)
Noise level ²	64.0 dB(A)	61.0 dB(A)	61.0 dB(A)	61.0 dB(A)	61.0 dB(A)	61.0 dB(A)	61.0 dB(A)
Efficiency (%)	25%	0.000					
	50%	91.0	88.8	88.6	88.3	91.0	91.0
	75%	91.7	90.3	90.3	90.3	90.2	91.0
	100%	92.4	90.4	90.6	90.8	90.2	91.0
Power Factor	25%	0.00					
	50%	0.68	0.65	0.62	0.59	0.74	0.69
	75%	0.78	0.77	0.74	0.72	0.82	0.79
	100%	0.83	0.83	0.81	0.79	0.86	0.84

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	8.1	8.1	8.1	8.1	8.1	8.1
	P2 (0,5;1,0)	6.8	6.8	6.8	6.8	6.8	6.8
	P3 (0,25;1,0)	6.3	6.3	6.3	6.3	6.3	6.3
	P4 (0,9;0,5)	3.9	3.9	3.9	3.9	3.9	3.9
	P5 (0,5;0,5)	2.7	2.7	2.7	2.7	2.7	2.7
	P6 (0,5;0,25)	1.8	1.8	1.8	1.8	1.8	1.8
	P7 (0,25;0,25)	1.2	1.2	1.2	1.2	1.2	1.2

	<u>Drive end</u>	<u>Non drive end</u>	Foundation loads
Bearing type :	6309 C3	6209 C3	Max. traction : 212 kgf
Sealing :	V'Ring	V'Ring	Max. compression : 349 kgf
Lubrication interval :	20000 h	20000 h	
Lubricant amount :	13 g	9 g	
Lubricant type :	Mobil Polyrex EM		

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	20/10/2024		Page 1 / 9	Revision

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes
USABLE @208V 39.8A SF 1.15 SFA 45.8A

Rev.	Changes Summary		Performed	Checked	Date
Performed by			Page 2 / 9		Revision
Checked by					
Date	20/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 14171846

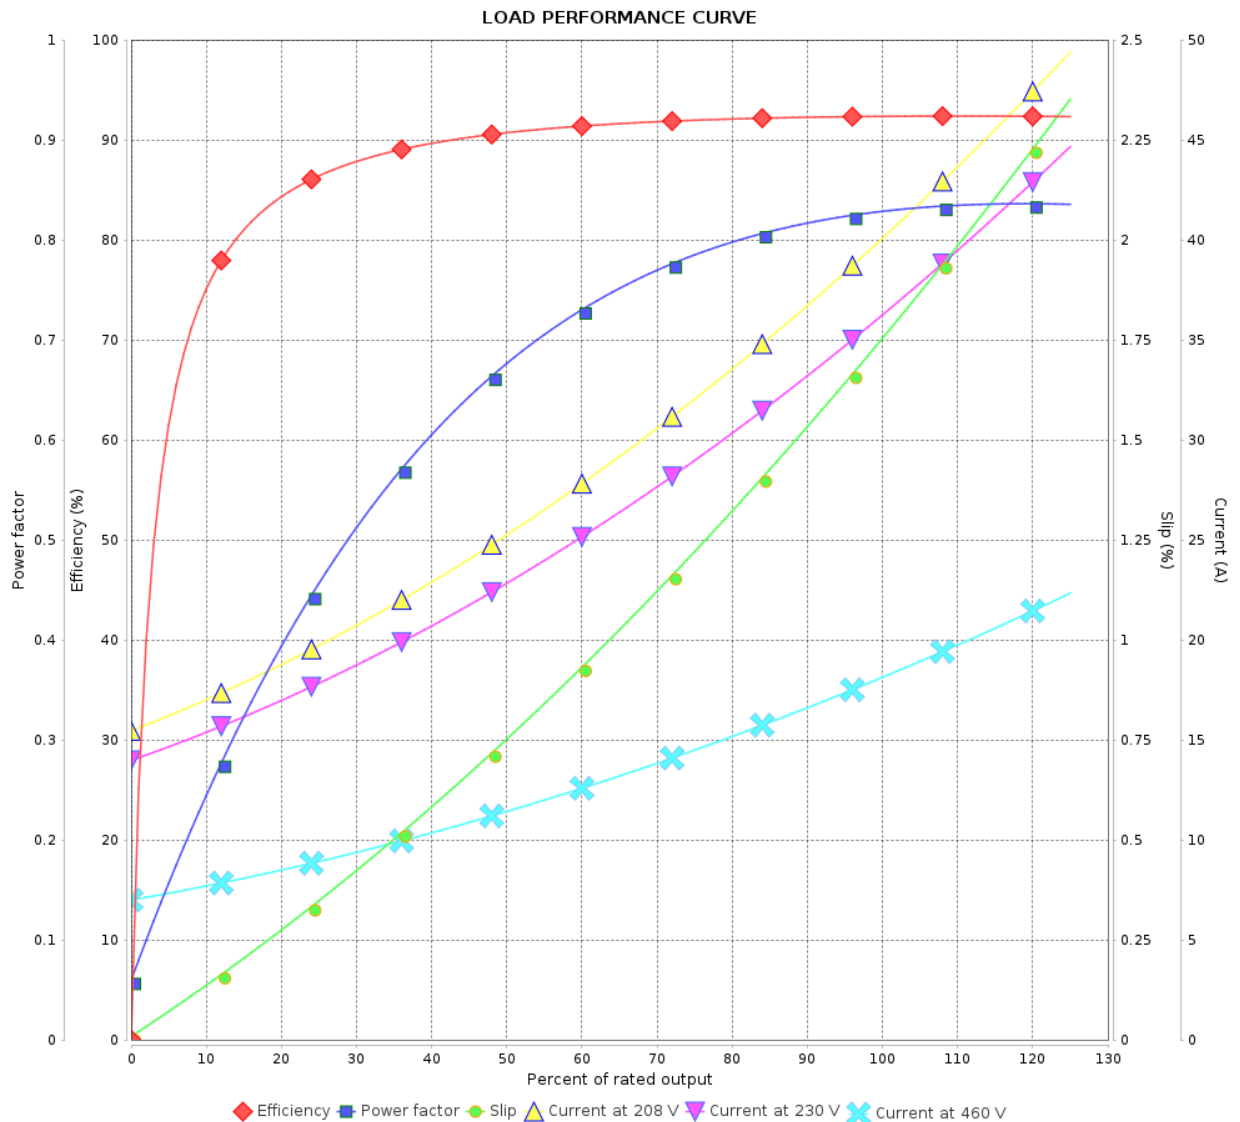

Performance : 230/460 V 60 Hz 4P

Rated current : 36.0/18.0 A
LRC : 6.4
Rated torque : 6.16 kgfm
Locked rotor torque : 240 %
Breakdown torque : 260 %
Rated speed : 1768 rpm

Moment of inertia (J) : 0.1104 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	20/10/2024		Page 3 / 9		Revision

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 14171846

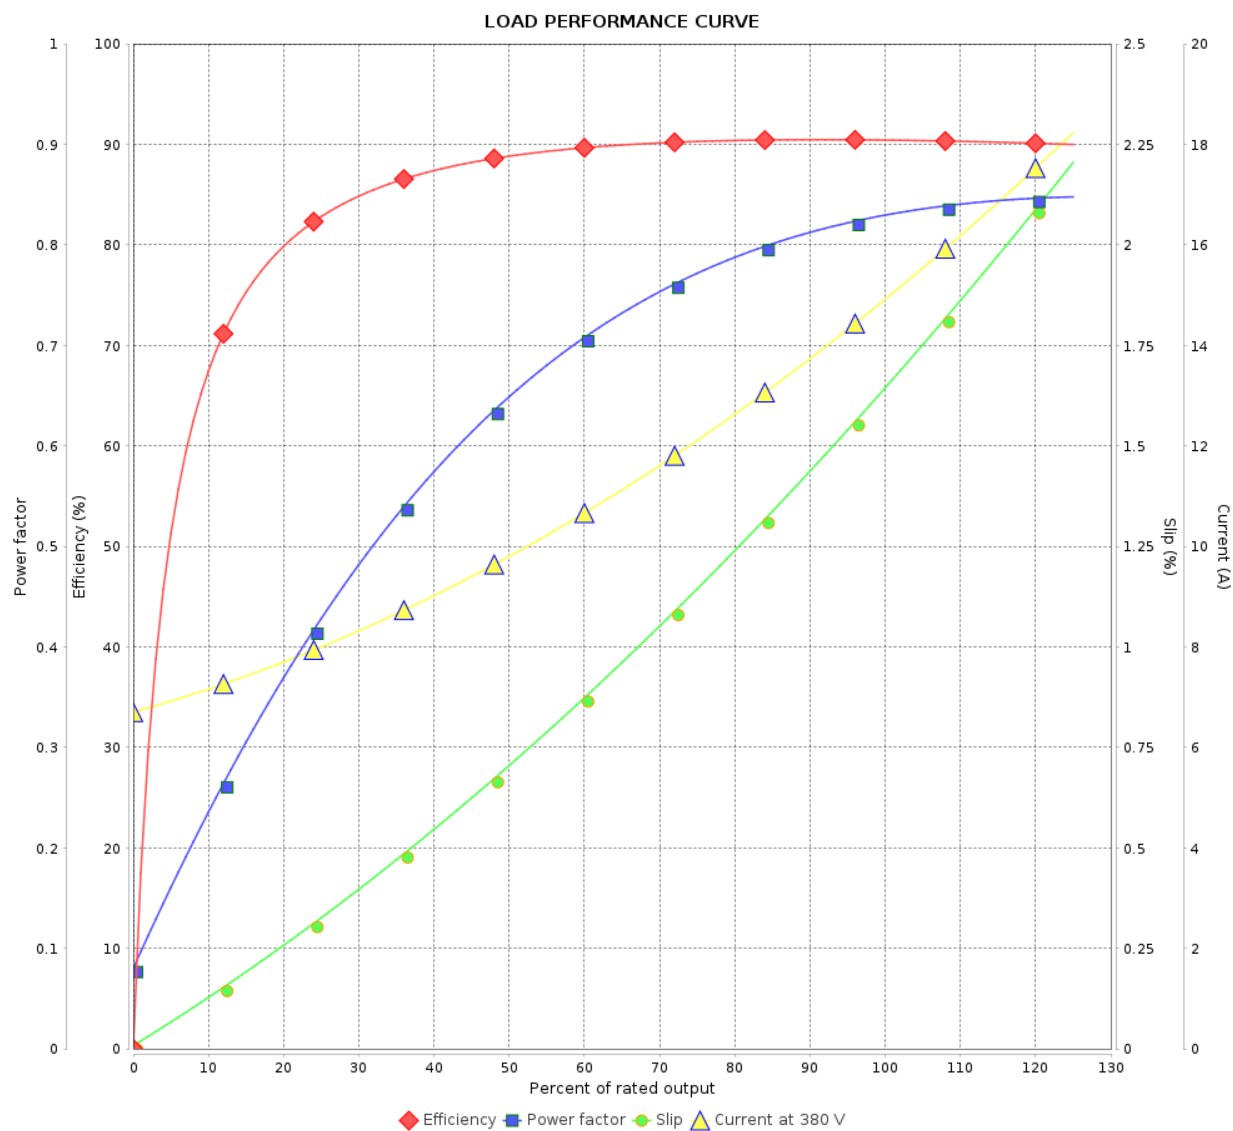

Performance : 380 V 50 Hz 4P IE3

Rated current : 15.2 A
LRC : 7.2
Rated torque : 4.92 kgfm
Locked rotor torque : 250 %
Breakdown torque : 300 %
Rated speed : 1475 rpm

Moment of inertia (J) : 0.1104 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 4 / 9Revision		
Checked by				
Date	20/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 14171846

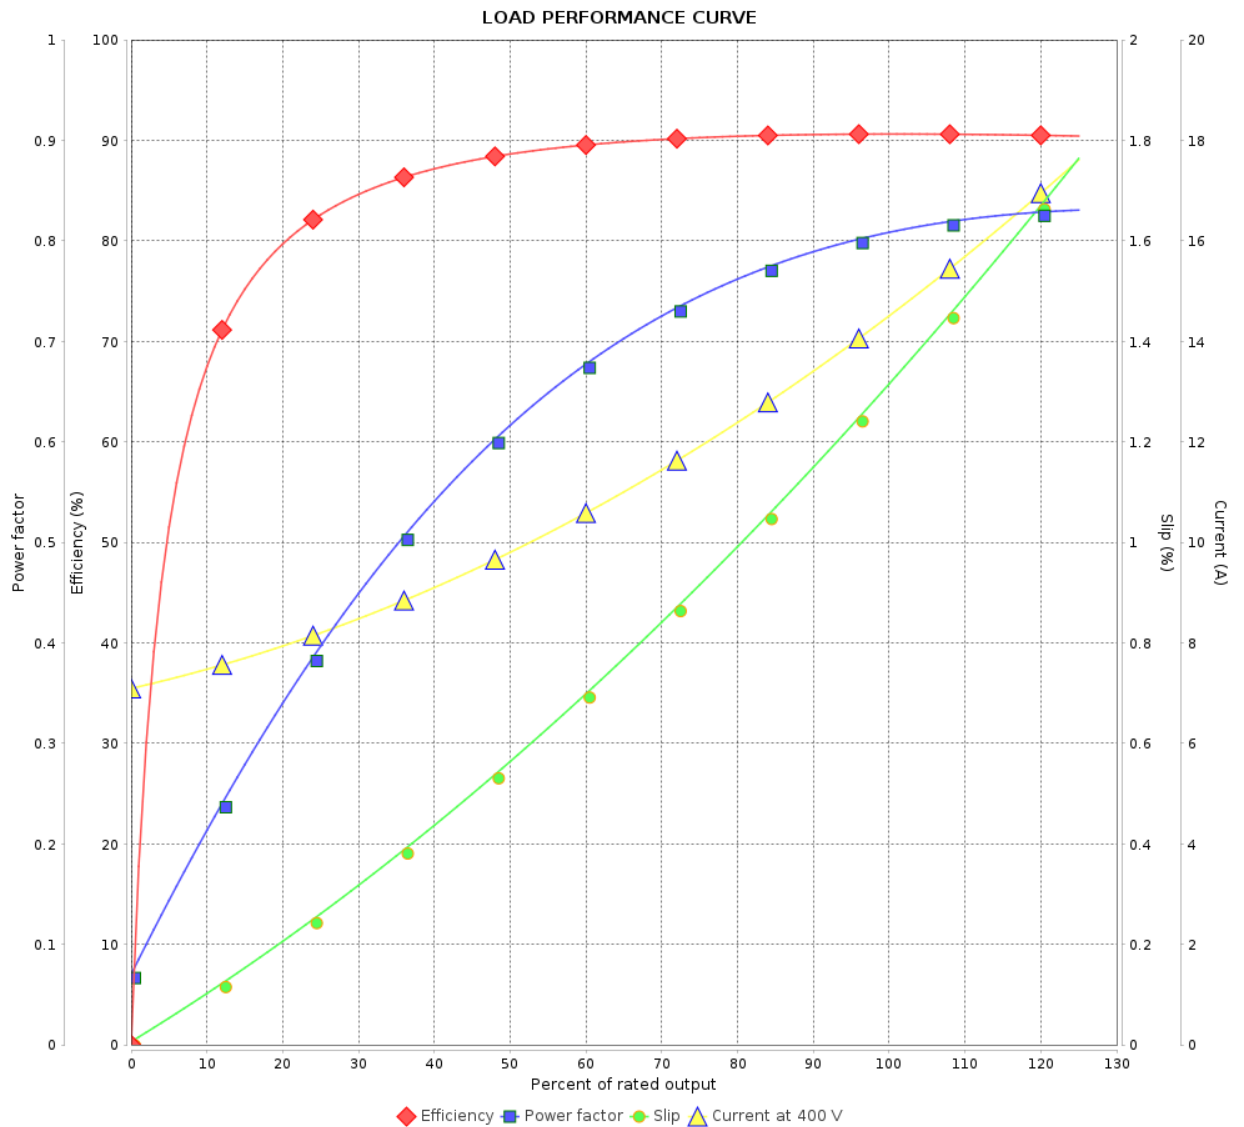

Performance : 400 V 50 Hz 4P IE3

Rated current : 14.8 A
LRC : 7.8
Rated torque : 4.90 kgfm
Locked rotor torque : 280 %
Breakdown torque : 340 %
Rated speed : 1480 rpm

Moment of inertia (J) : 0.1104 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 5 / 9	Revision
Checked by					
Date	20/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 14171846

LOAD PERFORMANCE CURVE

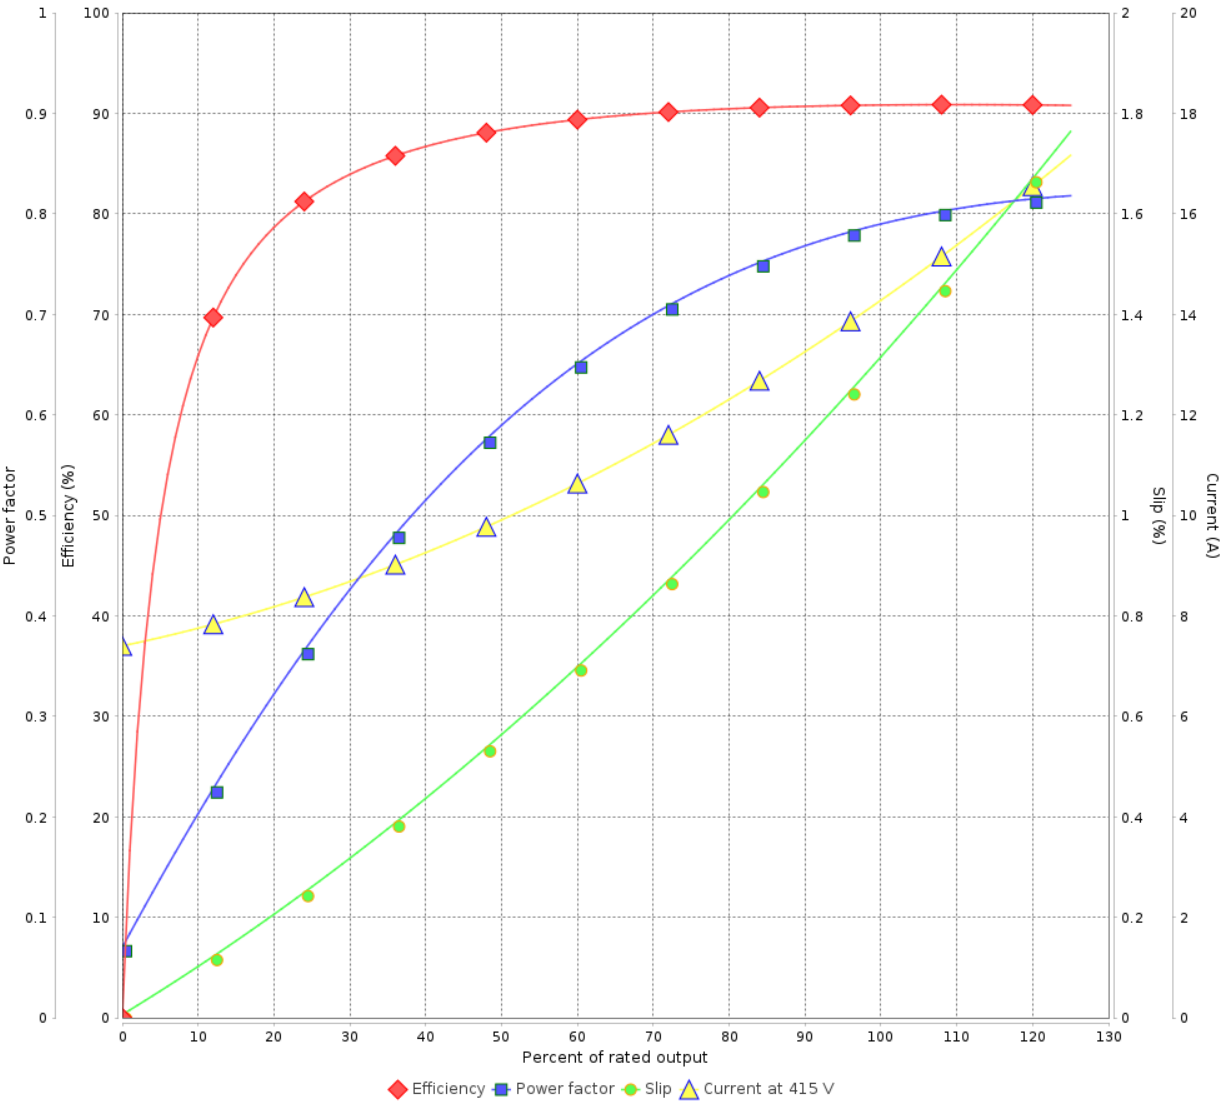

Performance : 415 V 50 Hz 4P IE3

Rated current	: 14.5 A	Moment of inertia (J)	: 0.1104 kgm ²
LRC	: 8.3	Duty cycle	: Cont.(S1)
Rated torque	: 4.90 kgfm	Insulation class	: F
Locked rotor torque	: 310 %	Service factor	: 1.25
Breakdown torque	: 370 %	Temperature rise	: 80 K
Rated speed	: 1480 rpm	Design	: B

Rev.	Changes Summary		Performed	Checked	Date
Performed by		Page 6 / 9 Revision			
Checked by					
Date	20/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 14171846

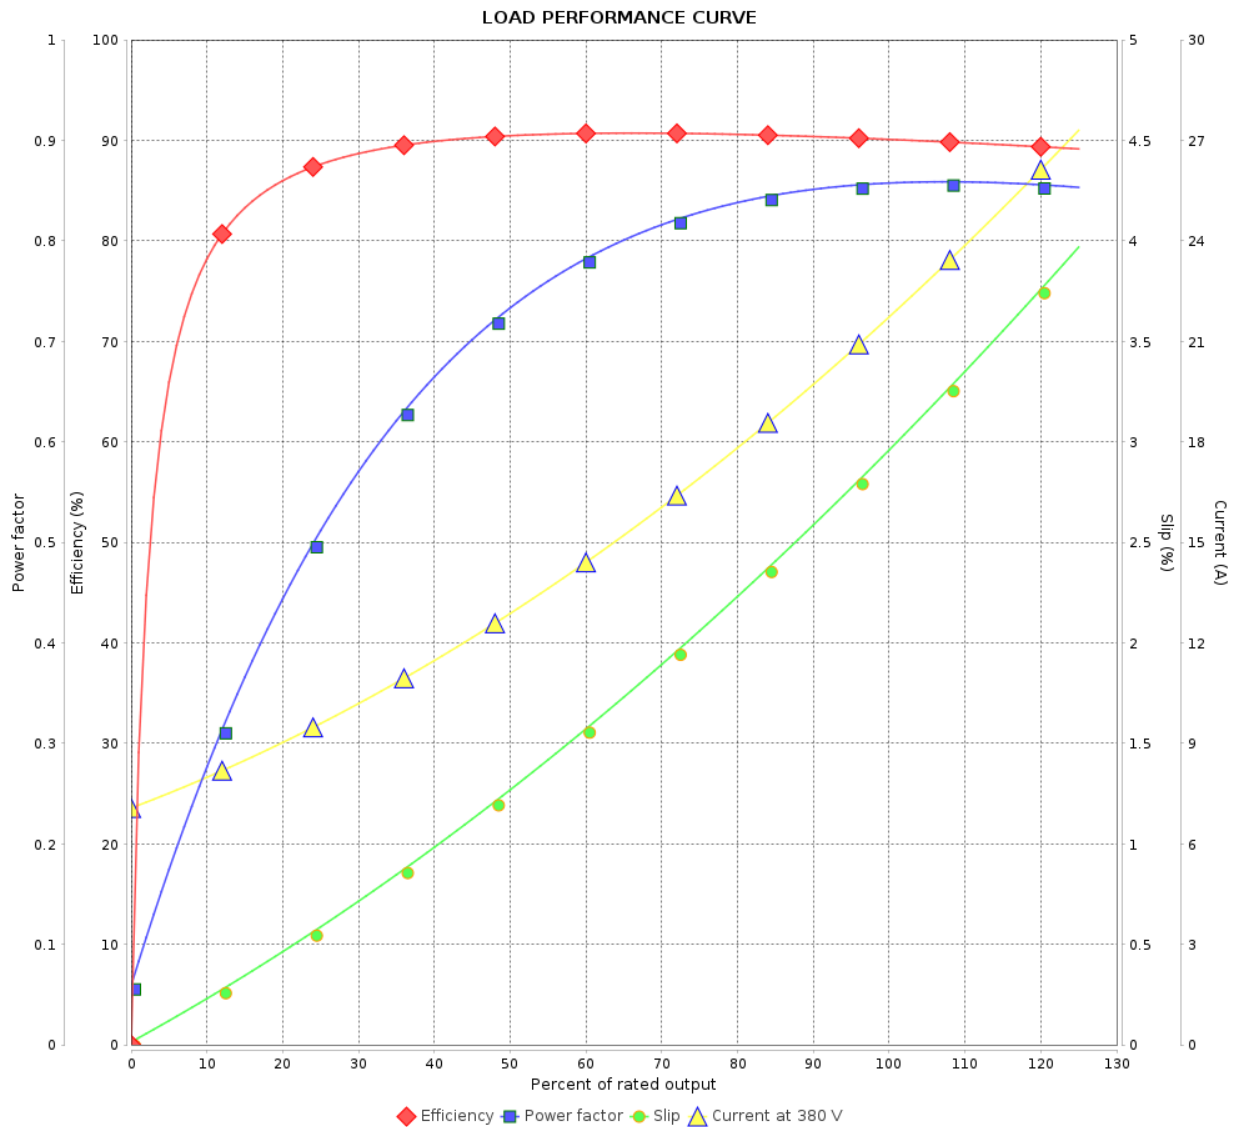

Performance : 380 V 50 Hz 4P IE2

Rated current	: 21.5 A	Moment of inertia (J)	: 0.1104 kgm ²
LRC	: 4.9	Duty cycle	: Cont.(S1)
Rated torque	: 7.48 kgfm	Insulation class	: F
Locked rotor torque	: 160 %	Service factor	: 1.00
Breakdown torque	: 200 %	Temperature rise	: 80 K
Rated speed	: 1455 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 7 / 9		
Checked by				
Date	20/10/2024			
		Revision		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 14171846

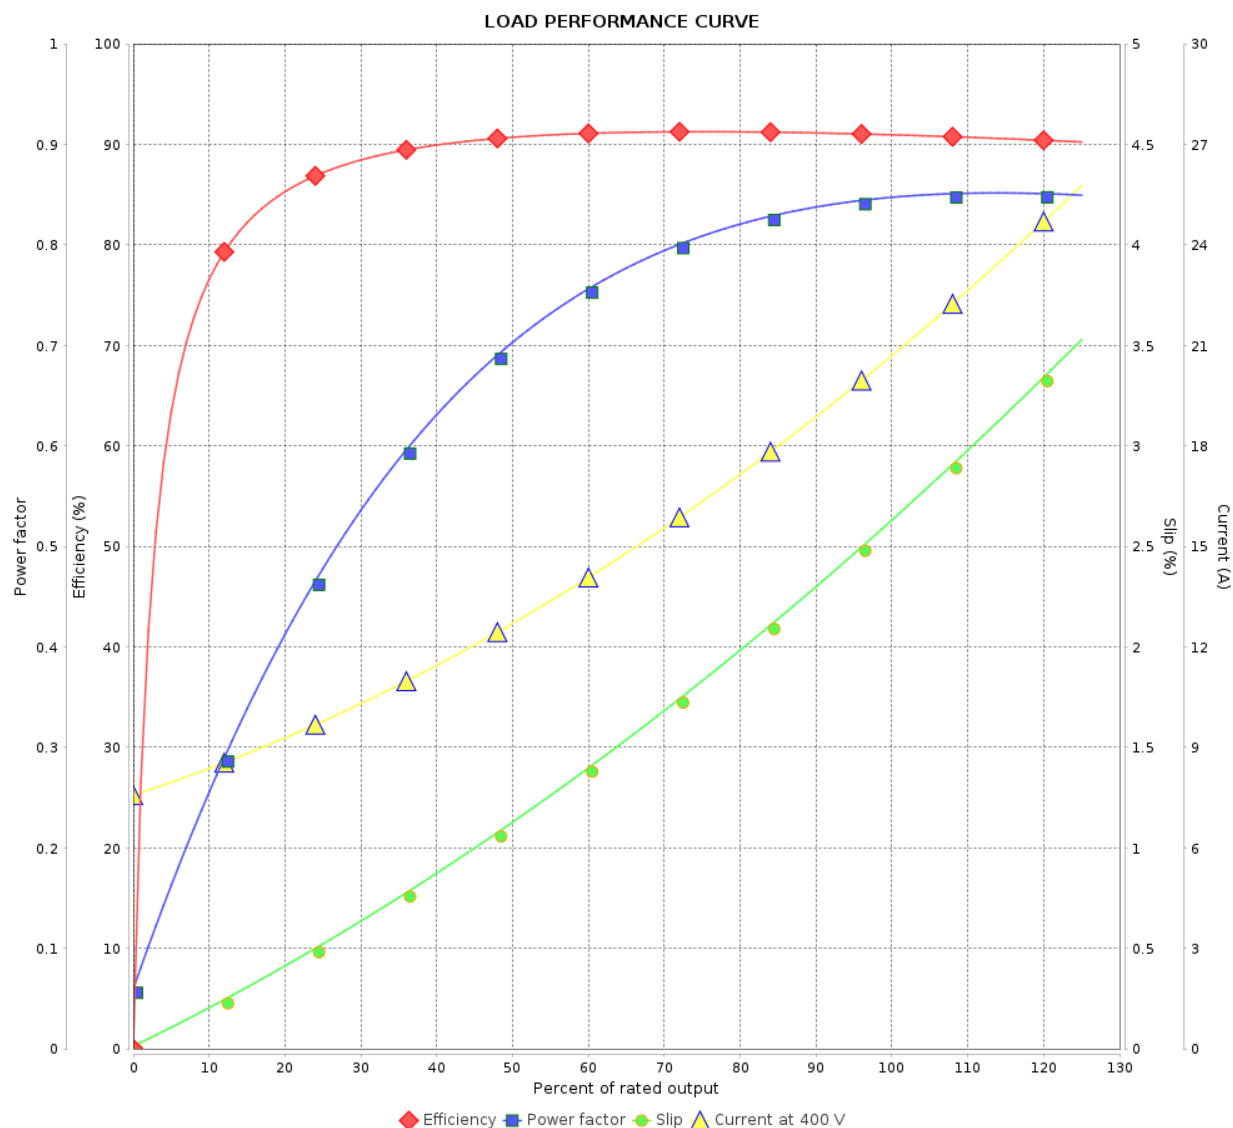

Performance : 400 V 50 Hz 4P IE2

Rated current : 20.5 A
LRC : 5.4
Rated torque : 7.46 kgfm
Locked rotor torque : 200 %
Breakdown torque : 220 %
Rated speed : 1460 rpm

Moment of inertia (J) : 0.1104 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				8 / 9	
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 14171846


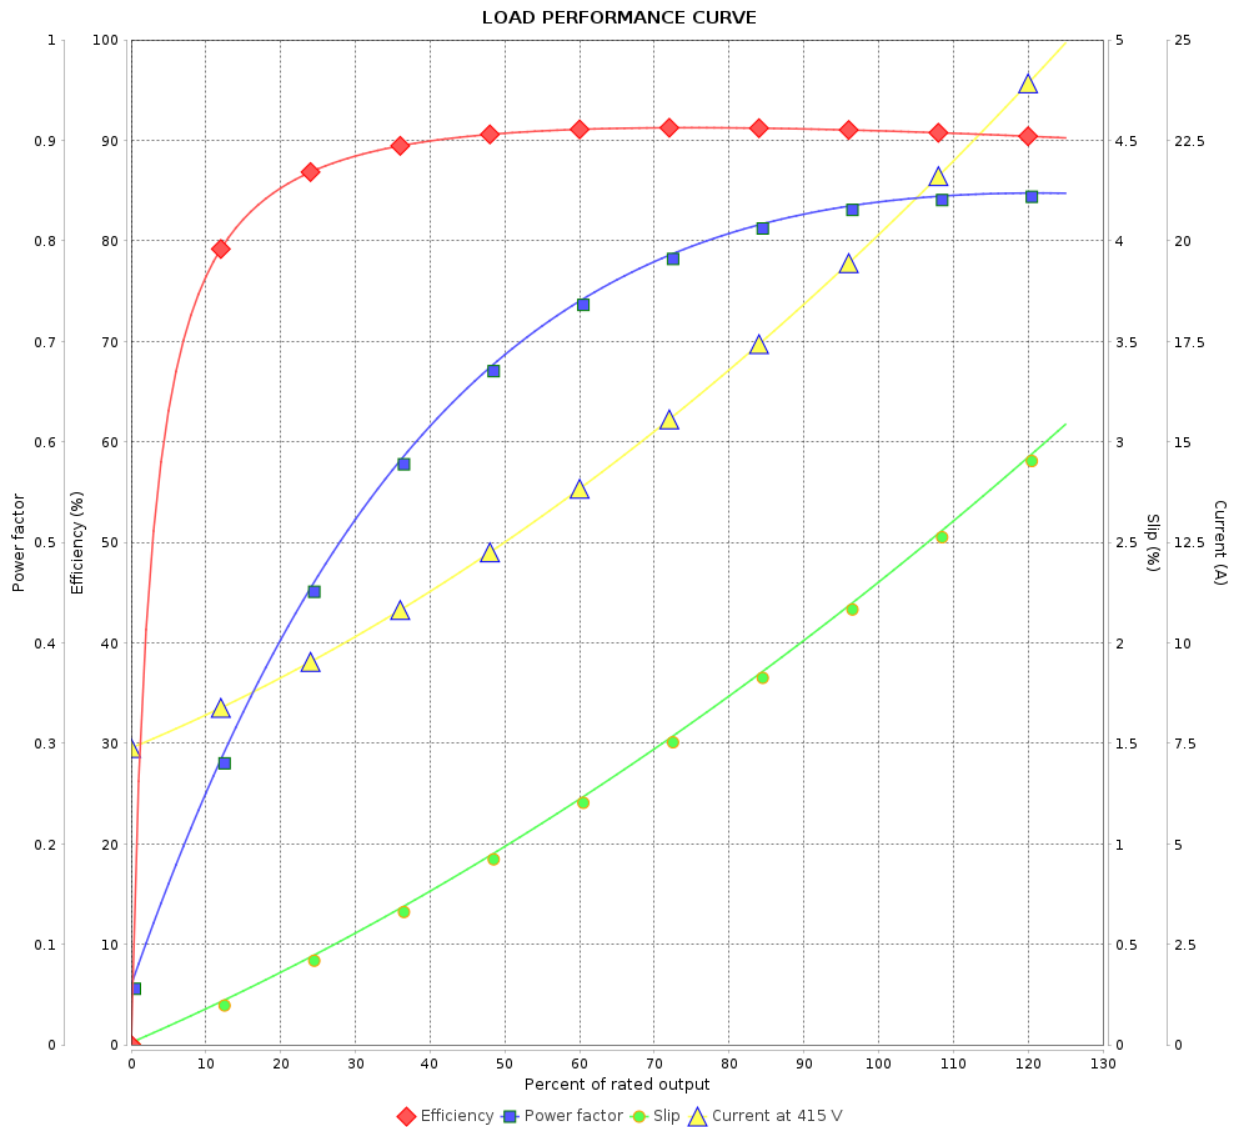




Performance : 415 V 50 Hz 4P IE2

Rated current : 20.0 A
LRC : 5.9
Rated torque : 7.43 kgfm
Locked rotor torque : 210 %
Breakdown torque : 240 %
Rated speed : 1465 rpm

Moment of inertia (J) : 0.1104 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

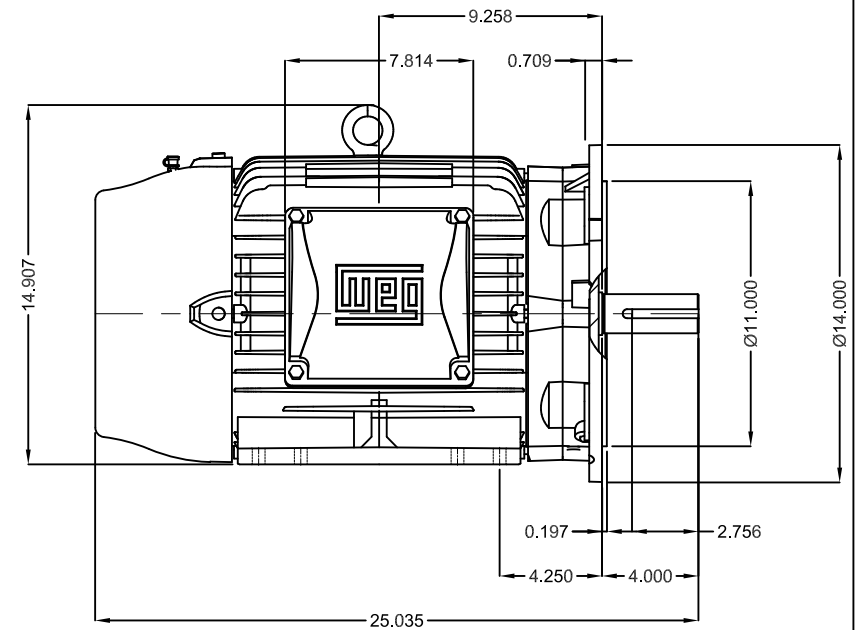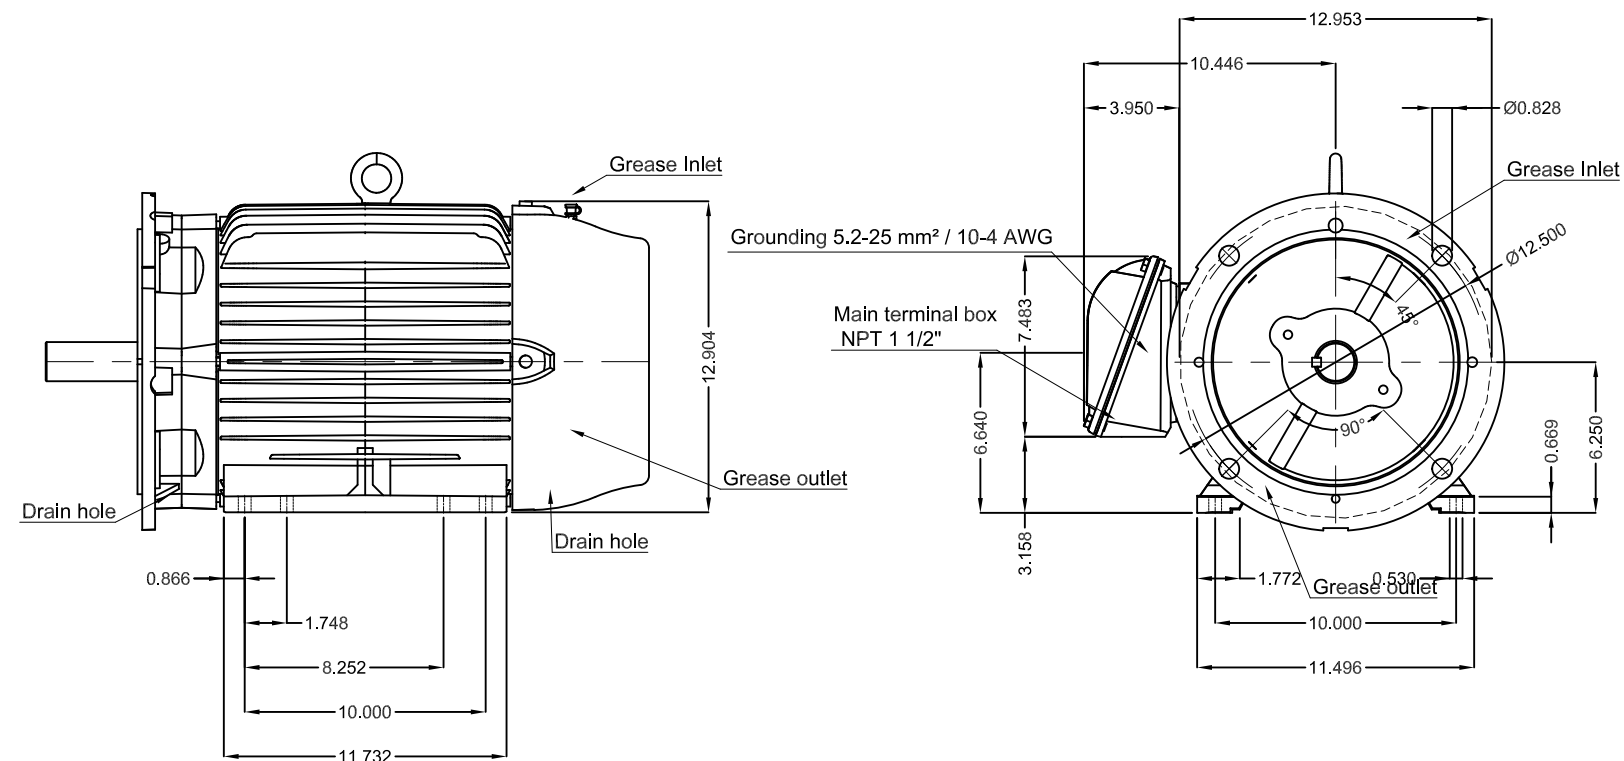Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 9 / 9Revision		
Checked by				
Date	20/10/2024			



15 HP 04 Poles 60 Hz										A
				HYBRISUSER					00	
ECM		LOC		SUMMARY OF MODIFICATIONS			EXECUTED		CHECKED	
							RELEASED		DATE	
EXECUTED		HYBRISUSER		 THREE PH. MOTOR W22 NEMA PREM. EFF. FRAME 254/6TD IP55 TEFC			PREVIEW WDD 00			
CHECKED										
RELEASED										
REL. DATE										
							SHEET		/	