

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: Standard Efficiency Three-Phase	Product code :	12894848
Frame	: 56C	Cooling method	: IC411 - TEFC	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 9.0 kg	
Protection degree	: IP55	Moment of inertia (J)	: 0.0019 kgm ²	
Output [HP]	0.5			
Poles	2			
Frequency [Hz]	60			
Rated voltage [V]	575			
Rated current [A]	0.674			
L. R. Amperes [A]	4.72			
LRC [A]	7.0x(Code L)			
No load current [A]	0.360			
Rated speed [RPM]	3500			
Slip [%]	2.78			
Rated torque [kgfm]	0.104			
Locked rotor torque [%]	260			
Breakdown torque [%]	300			
Service factor	1.15			
Temperature rise	80 K			
Locked rotor time	63s (cold) 35s (hot)			
Noise level ²	68.0 dB(A)			
Efficiency (%)	25%	50.9		
	50%	55.0		
	75%	62.0		
	100%	68.0		
Power Factor	25%	0.43		
	50%	0.67		
	75%	0.75		
	100%	0.81		
Bearing type	: Drive end 6203 ZZ	Non drive end 6202 ZZ	Foundation loads	
Sealing	: V'Ring	Without Bearing Seal	Max. traction	: 5 kgf
			Max. compression	: 14 kgf
Lubrication interval	: -	-		
Lubricant amount	: -	-		
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary		Performed	Checked
Performed by			Page	Revision
Checked by				
Date	13/05/2022			
This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A. Subject to change without notice				


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase Product code : 12894848

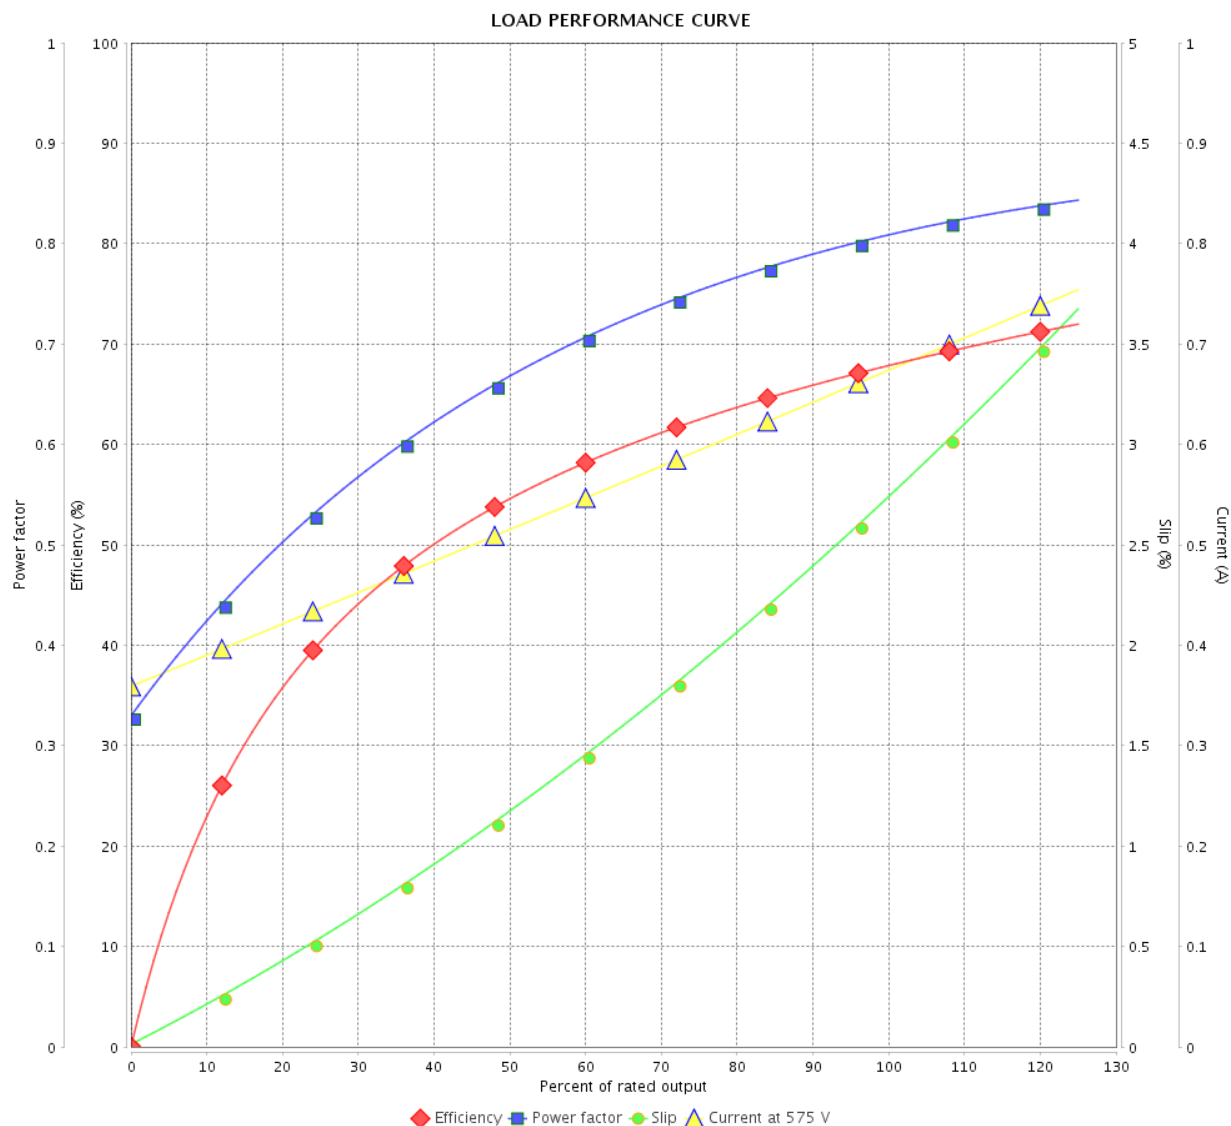

Performance : 575 V 60 Hz 2P

Rated current : 0.674 A
 LRC : 7.0
 Rated torque : 0.104 kgfm
 Locked rotor torque : 260 %
 Breakdown torque : 300 %
 Rated speed : 3500 rpm

Moment of inertia (J) : 0.0019 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

