

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: Standard Efficiency Three-Phase	Product code :	13326285
Frame	: 56HC	Cooling method	: IC411 - TEFC	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 17.0 kg	
Protection degree	: IP55	Moment of inertia (J)	: 0.0052 kgm <sup>2</sup>	
Design	: A			
Output [HP]	2			
Poles	4			
Frequency [Hz]	60			
Rated voltage [V]	575			
Rated current [A]	2.28			
L. R. Amperes [A]	16.6			
LRC [A]	7.3x(Code K)			
No load current [A]	1.33			
Rated speed [RPM]	1745			
Slip [%]	3.06			
Rated torque [kgfm]	0.832			
Locked rotor torque [%]	240			
Breakdown torque [%]	270			
Service factor	1.15			
Temperature rise	80 K			
Locked rotor time	14s (cold) 8s (hot)			
Noise level <sup>2</sup>	52.0 dB(A)			
Efficiency (%)	25%			
	50%	80.0		
	75%	81.5		
	100%	82.5		
Power Factor	25%			
	50%	0.58		
	75%	0.72		
	100%	0.80		
Bearing type	: Drive end 6204 ZZ	Non drive end 6202 ZZ	Foundation loads	
Sealing	: V'Ring	V'Ring	Max. traction : 64 kgf	
Lubrication interval	: -	-	Max. compression : 81 kgf	
Lubricant amount	: -	-		
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by				
Date	13/05/2022		Page 1 / 2	Revision


# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase Product code : 13326285

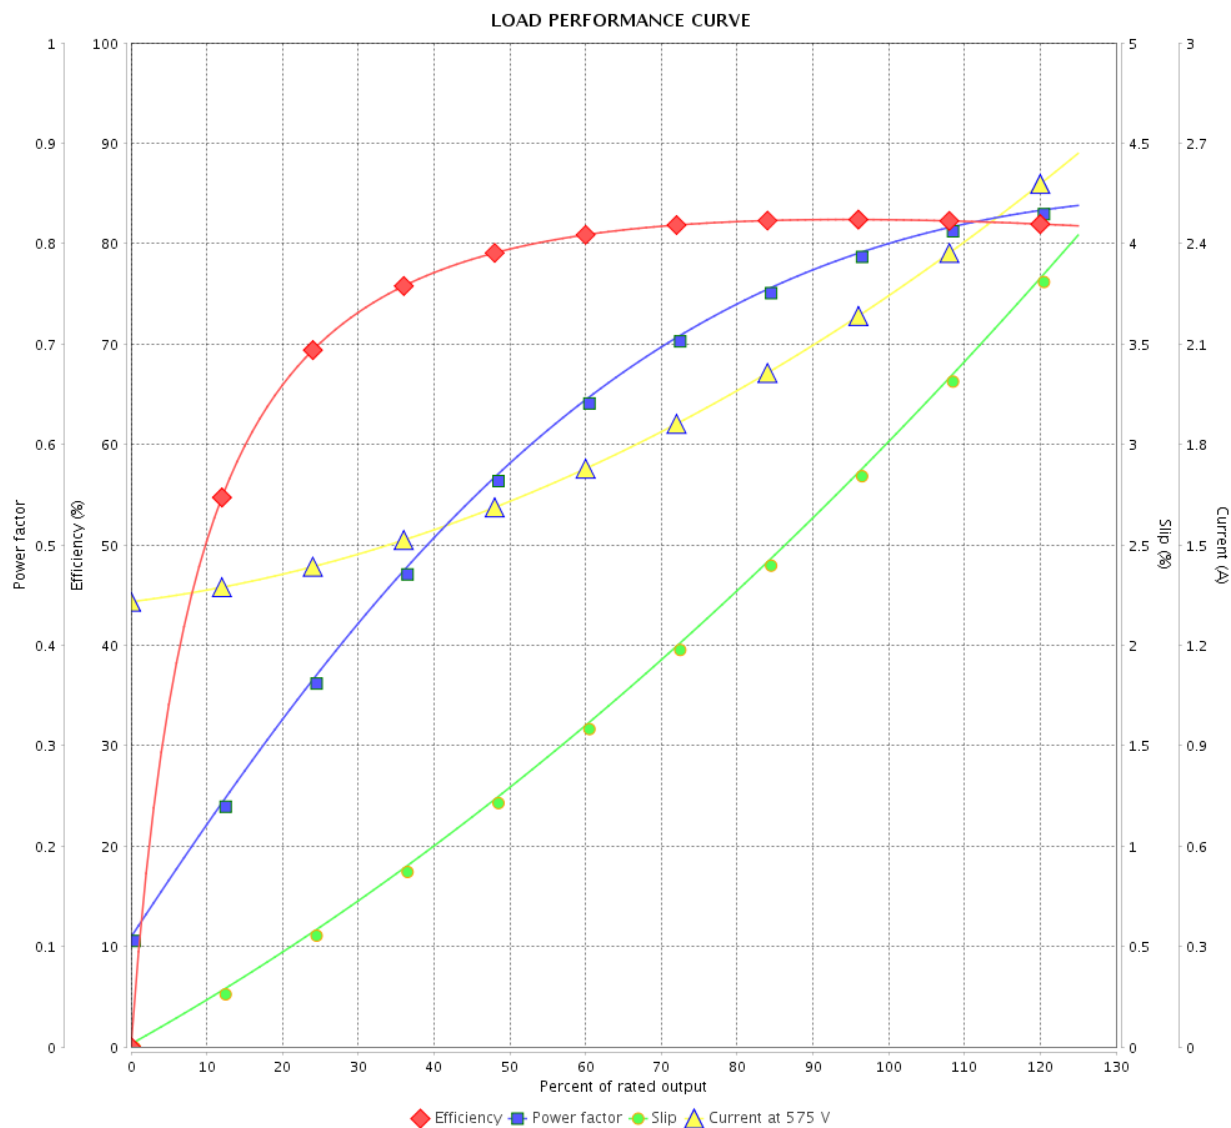




Performance : 575 V 60 Hz 4P

Rated current : 2.28 A  
 LRC : 7.3  
 Rated torque : 0.832 kgfm  
 Locked rotor torque : 240 %  
 Breakdown torque : 270 %  
 Rated speed : 1745 rpm

Moment of inertia (J) : 0.0052 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : A

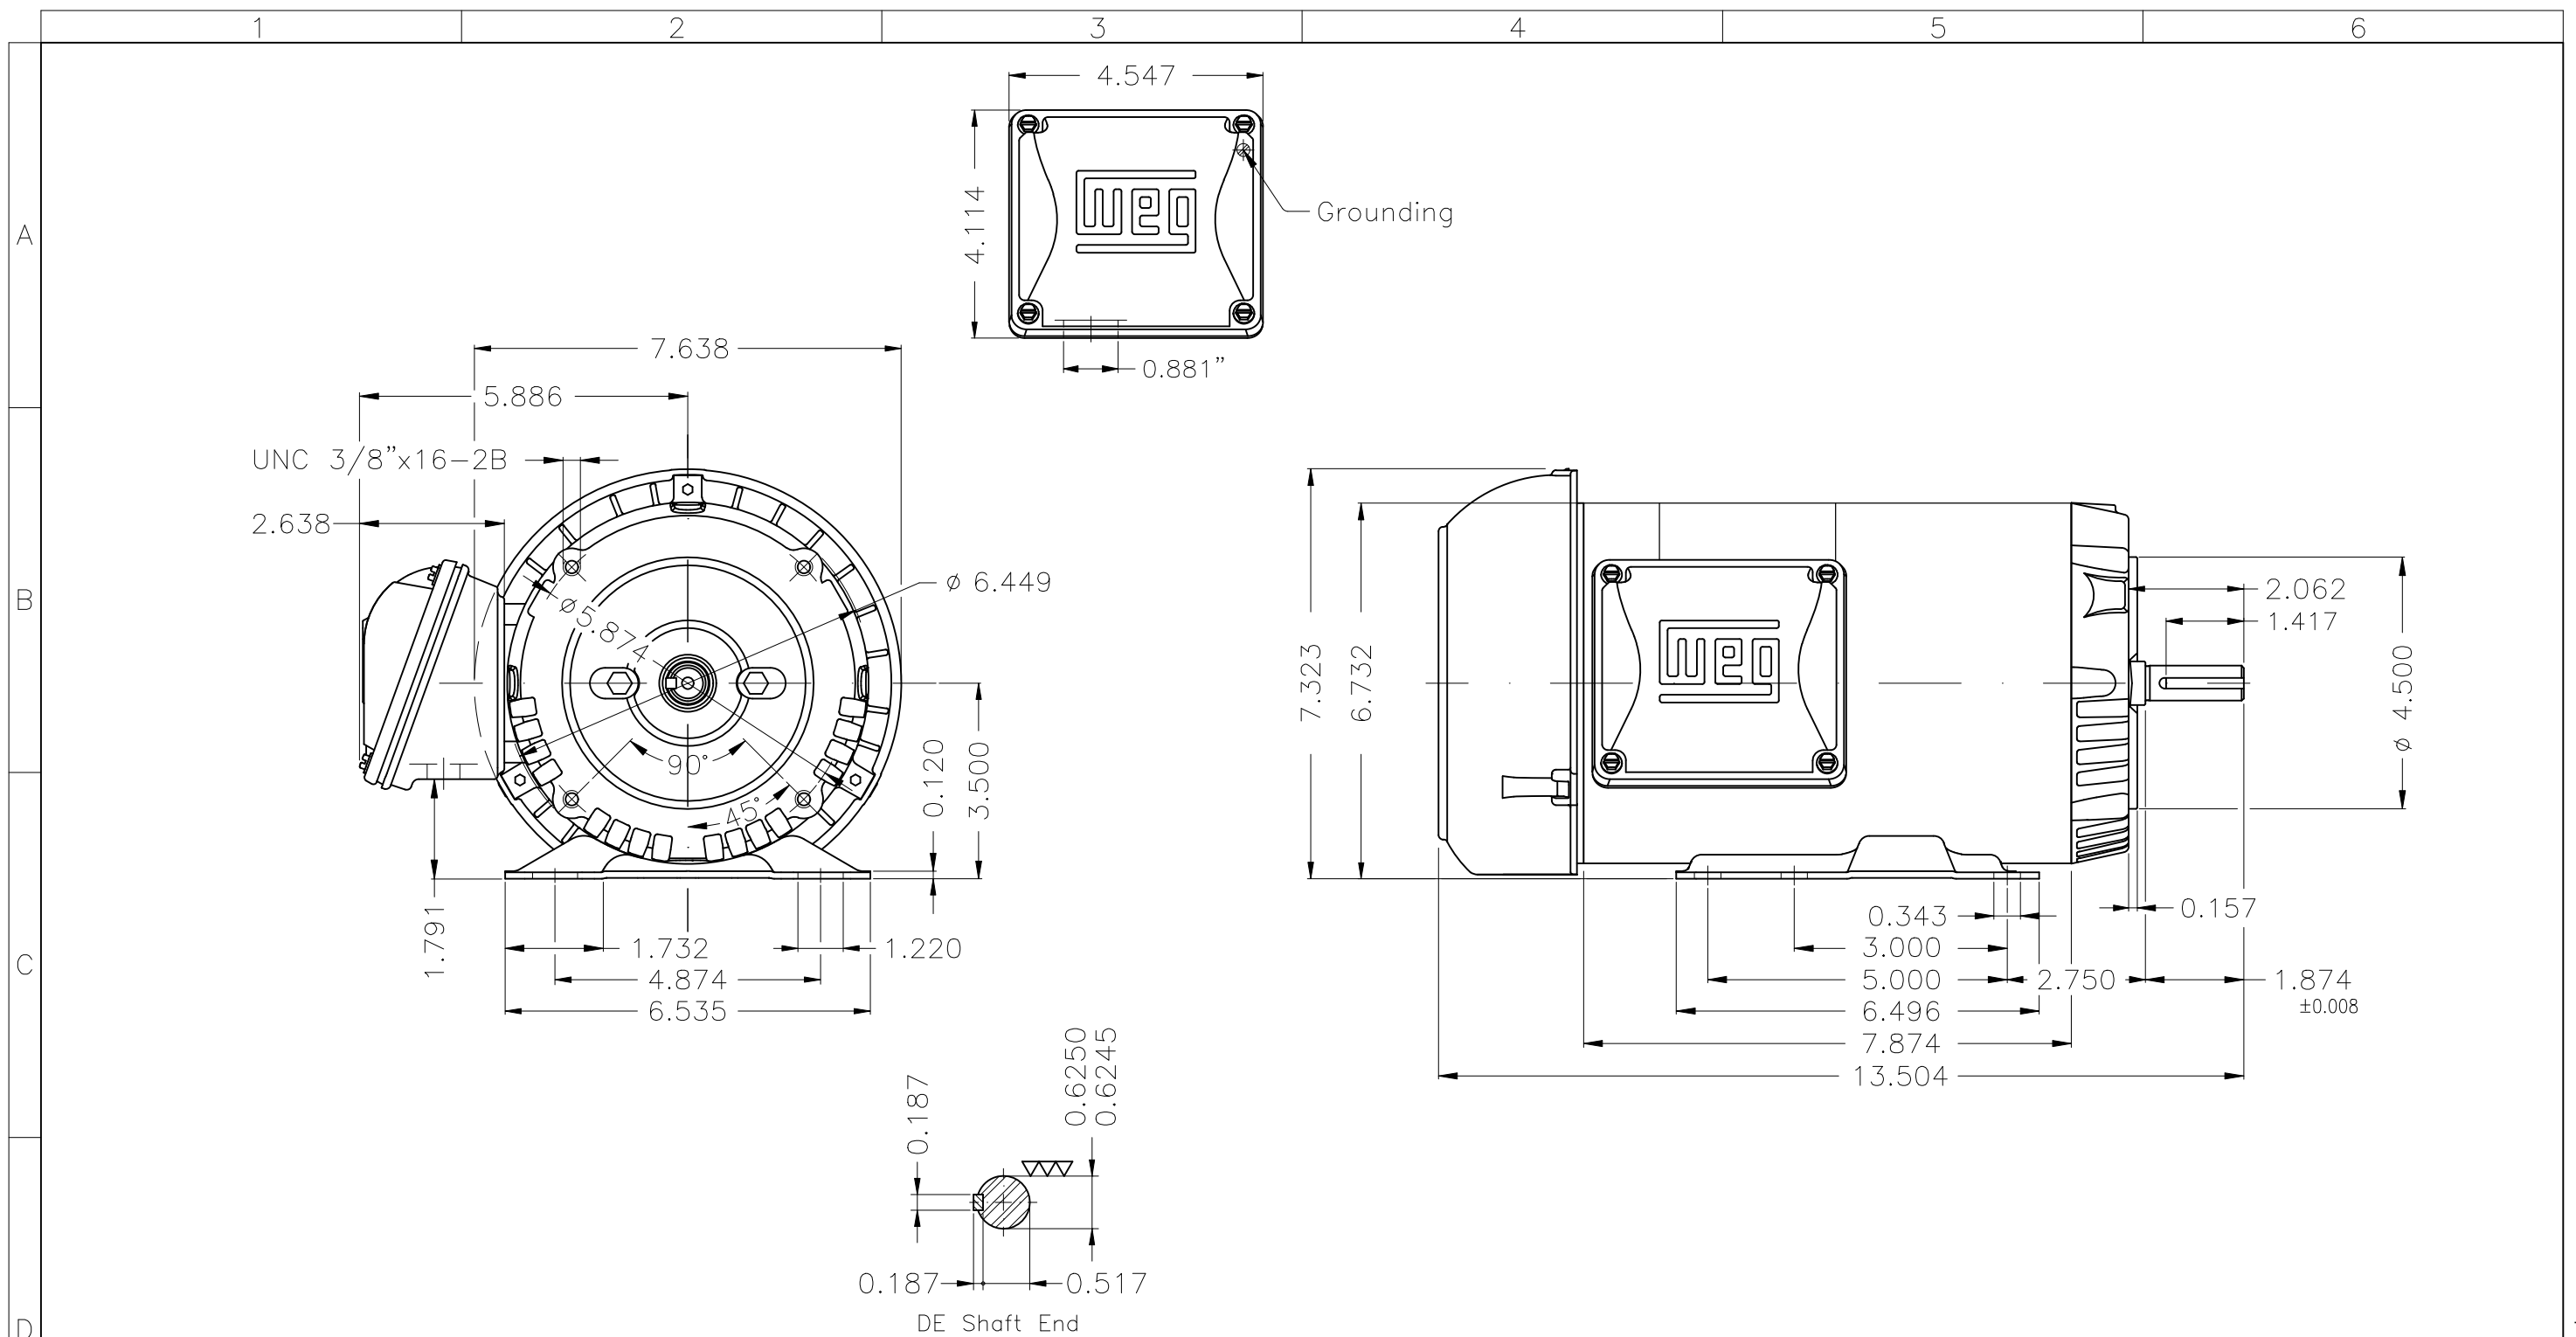Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					



Color Munsell N 1 matte black									
Painting plan 207N									
Mounting B34D									
				HYBRISUSER					00
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		THREE PH. MOTOR ROLLED STEEL FRAME 56HC IP55 TEFC			PREVIEW WDD   00			
CHECKED									
RELEASED									
REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1			