

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 12730182

Frame	: 182T	Locked rotor time	: 41s (cold) 23s (hot)
Output	: 3 HP (2.2 kW)	Temperature rise	: 70 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +50°C
Rated voltage	: 115 V	Altitude	: 1000 m.a.s.l.
Rated current	: 15.6 A	Protection degree	: IP55
L. R. Amperes	: 127 A	Cooling method	: IC411 - TEFC
LRC	: 8.1x(Code K)	Mounting	: F-1
No load current	: 8.00 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1760 rpm	Noise level ²	: 56.0 dB(A)
Slip	: 2.22 %	Starting method	: Direct On Line
Rated torque	: 1.24 kgfm	Approx. weight ³	: 41.0 kg
Locked rotor torque	: 229 %		
Breakdown torque	: 340 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0143 kgm ²		
Design	: B		

Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	87.5	88.5	89.5	Max. traction	: 67 kgf
Power Factor	0.00	0.61	0.73	0.79	Max. compression	: 108 kgf

	Drive end	Non drive end
Bearing type	: 6207 ZZ	6206 ZZ
Sealing	: V'Ring	V'Ring
Lubrication interval	: 0 h	0 h
Lubricant amount	: 0 g	0 g
Lubricant type	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 1 / 2		
Checked by				
Date	20/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12730182

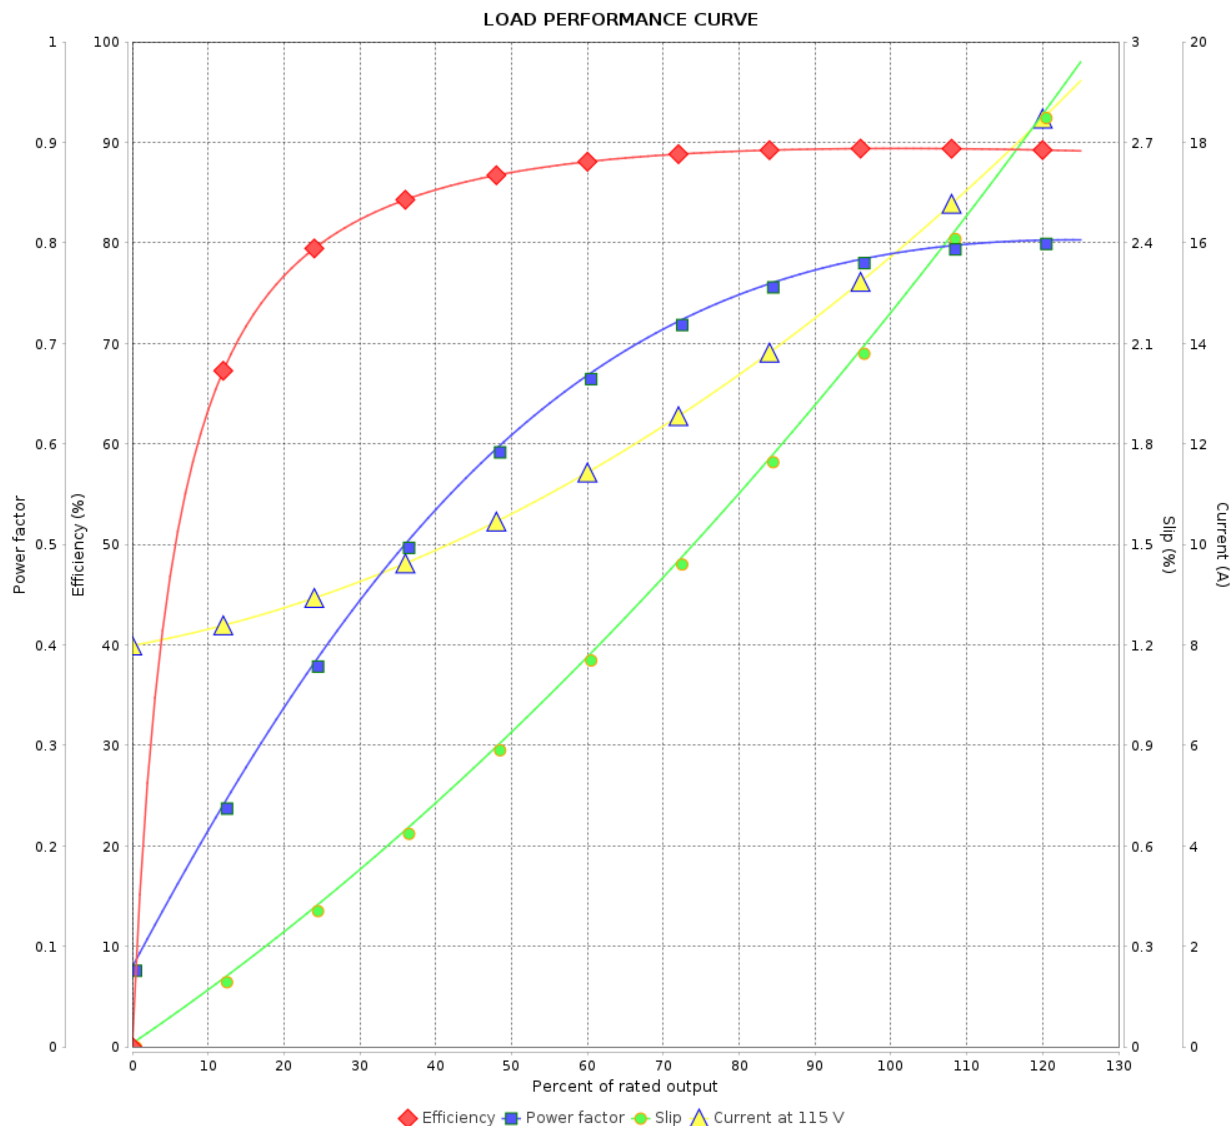

Performance : 115 V 60 Hz 4P

Rated current : 15.6 A
LRC : 8.1
Rated torque : 1.24 kgfm
Locked rotor torque : 229 %
Breakdown torque : 340 %
Rated speed : 1760 rpm

Moment of inertia (J) : 0.0143 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 70 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 2	Revision
Checked by					
Date	20/10/2024				

