

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11939472

Frame	: 213/5T	Locked rotor time	: 79s (cold) 44s (hot)
Output	: 3 HP (2.2 kW)	Temperature rise	: 80 K
Poles	: 8	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 3.69 A	Protection degree	: IP55
L. R. Amperes	: 25.1 A	Cooling method	: IC411 - TEFC
LRC	: 6.8x(Code K)	Mounting	: F-1
No load current	: 2.40 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 870 rpm	Noise level ²	: 52.0 dB(A)
Slip	: 3.33 %	Starting method	: Direct On Line
Rated torque	: 2.50 kgfm	Approx. weight ³	: 85.6 kg
Locked rotor torque	: 220 %		
Breakdown torque	: 300 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0888 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	84.0	85.5	85.5	Max. traction	: 96 kgf
Power Factor	0.49	0.62	0.70	Max. compression	: 181 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
19.1	18.2	17.9	9.5	7.8	5.8	4.5

	Drive end	Non drive end
Bearing type	: 6308 C3	: 6207 C3
Sealing	: Taconite Labyrinth	: Taconite Labyrinth
Lubrication interval	: 20000 h	: 20000 h
Lubricant amount	: 11 g	: 7 g
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	22/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11939472




LOAD PERFORMANCE CURVE

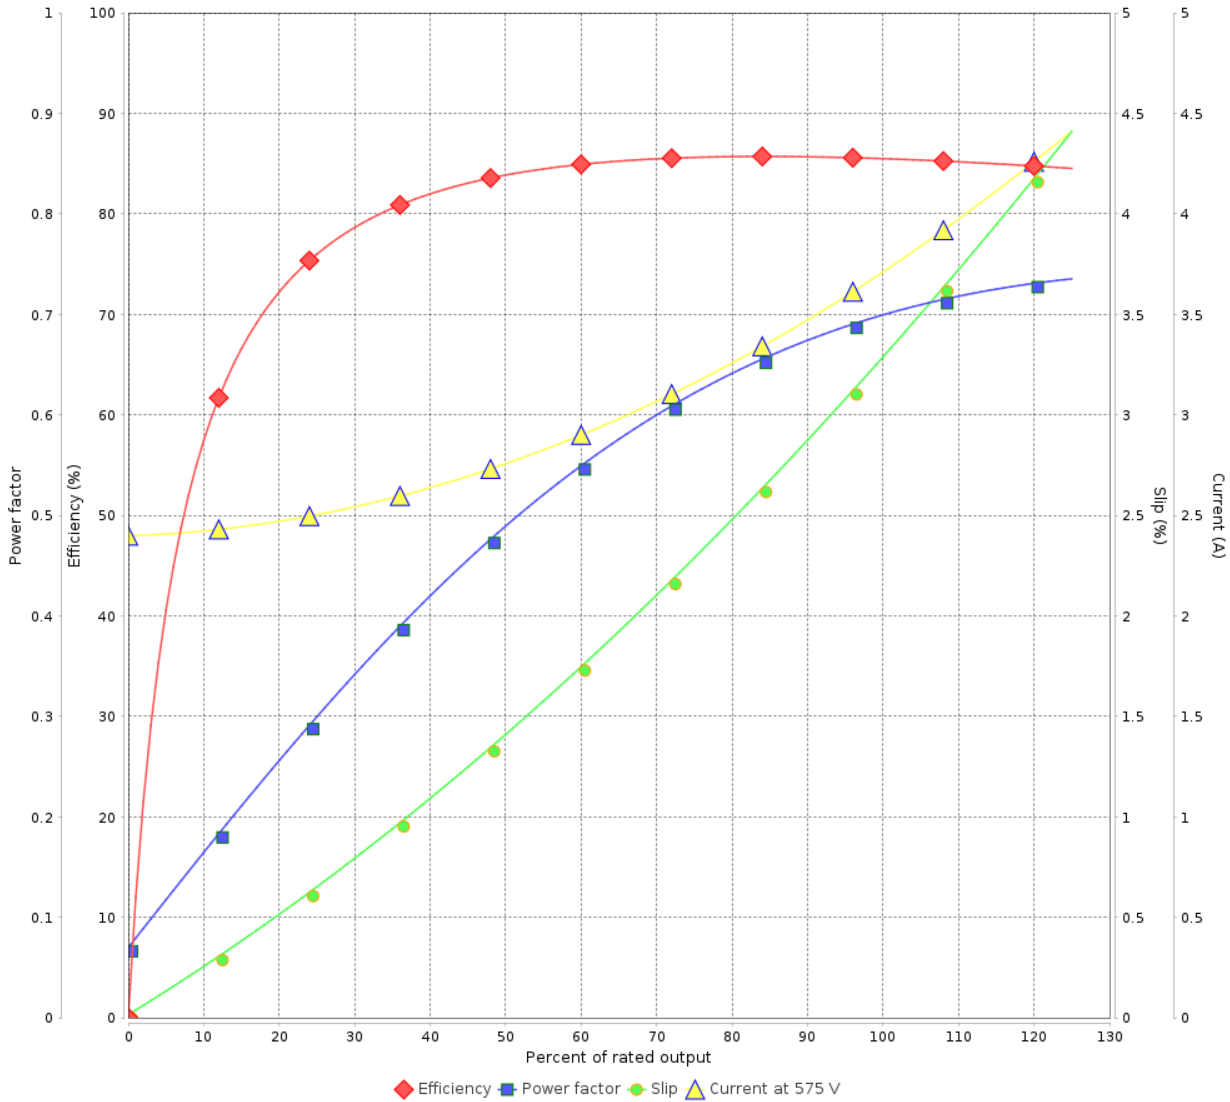


Performance : 575 V 60 Hz 8P

Rated current	: 3.69 A	Moment of inertia (J)	: 0.0888 kgm ²
LRC	: 6.8	Duty cycle	: Cont.(S1)
Rated torque	: 2.50 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.25
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 870 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	22/10/2024			

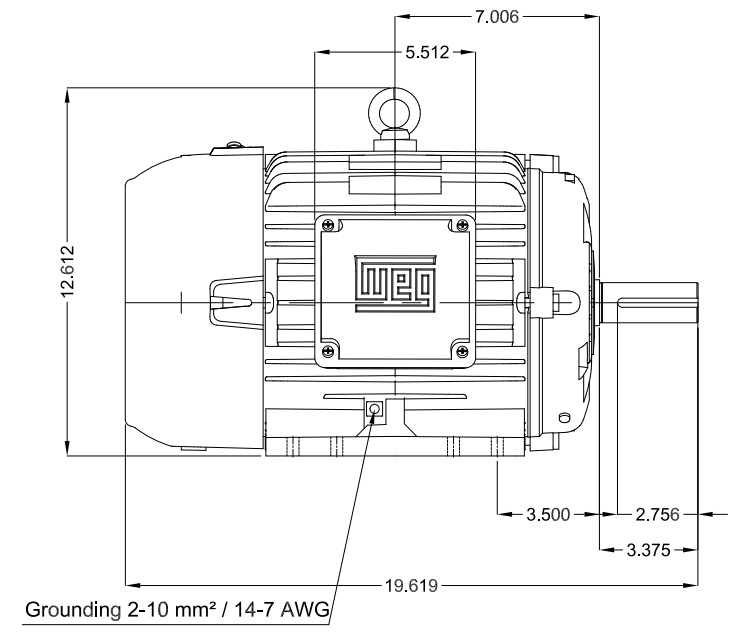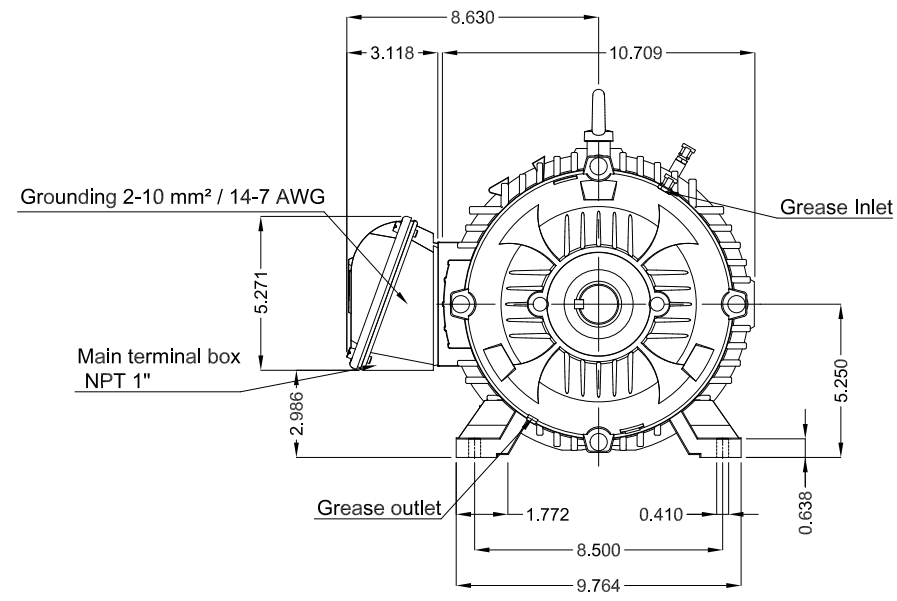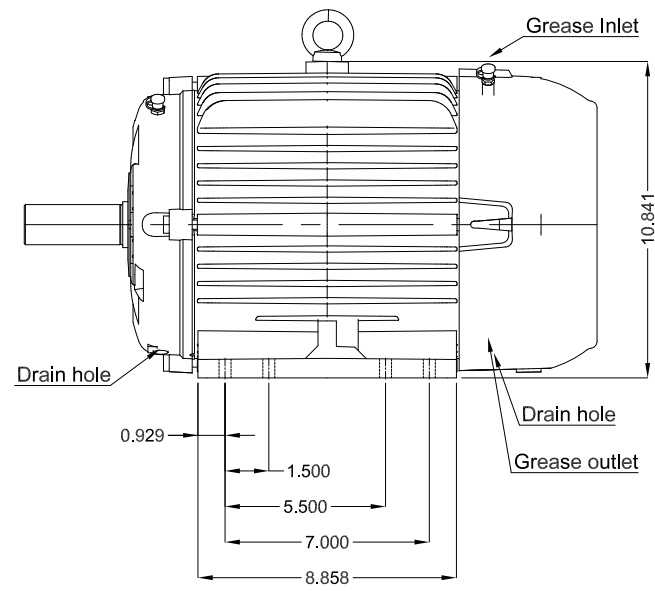

Sealing - Taconite labyrinth
 Grease outlet according to IEEE841
 Color RAL 5009
 Painting plan 202E
 Mounting B3R(D)



3 HP 08 Poles 60 Hz							A
ECM	LOC	SUMMARY OF MODIFICATIONS			HYBRISUSER		00
EXECUTED	HYBRISUSER	THREE PH. MOTOR IEEE 841 W22 NEMA PREM. EFF.			EXECUTED	CHECKED	RELEASED
CHECKED		FRAME 213/5T IP55 TEFC			RELEASED	DATE	VER
RELEASED					REL. DATE		

PREVIEW

WDD 00

SHEET /