

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line		: W22 IEEE 841 NEMA Premium Efficiency Three-Phase		Product code : 13763562		
Frame	: 213/5T			Locked rotor time	: 102s (cold) 57s (hot)	
Output	: 5 HP (3.7 kW)			Temperature rise	: 80 K	
Poles	: 6			Duty cycle	: Cont.(S1)	
Frequency	: 60 Hz			Ambient temperature	: -20°C to +40°C	
Rated voltage	: 200 V			Altitude	: 1000 m.a.s.l.	
Rated current	: 15.7 A			Protection degree	: IP55	
L. R. Amperes	: 107 A			Cooling method	: IC411 - TEFC	
LRC	: 6.8x(Code J)			Mounting	: F-1	
No load current	: 7.94 A			Rotation ¹	: Both (CW and CCW)	
Rated speed	: 1170 rpm			Noise level ²	: 55.0 dB(A)	
Slip	: 2.50 %			Starting method	: Direct On Line	
Rated torque	: 3.10 kgfm			Approx. weight ³	: 82.0 kg	
Locked rotor torque	: 170 %					
Breakdown torque	: 260 %					
Insulation class	: F					
Service factor	: 1.25					
Moment of inertia (J)	: 0.0620 kgm ²					
Design	: B					
Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	88.5	89.5	89.5	Max. traction : 108 kgf	
Power Factor	0.00	0.58	0.70	0.76	Max. compression : 190 kgf	
			<u>Drive end</u>		<u>Non drive end</u>	
Bearing type	:	6308 C3		6207 C3		
Sealing	:	Inpro/Seal		Inpro/Seal		
Lubrication interval	:	20000 h		20000 h		
Lubricant amount	:	11 g		7 g		
Lubricant type	:	Mobil Polyrex EM				
Notes						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	22/10/2024				1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 13763562

LOAD PERFORMANCE CURVE

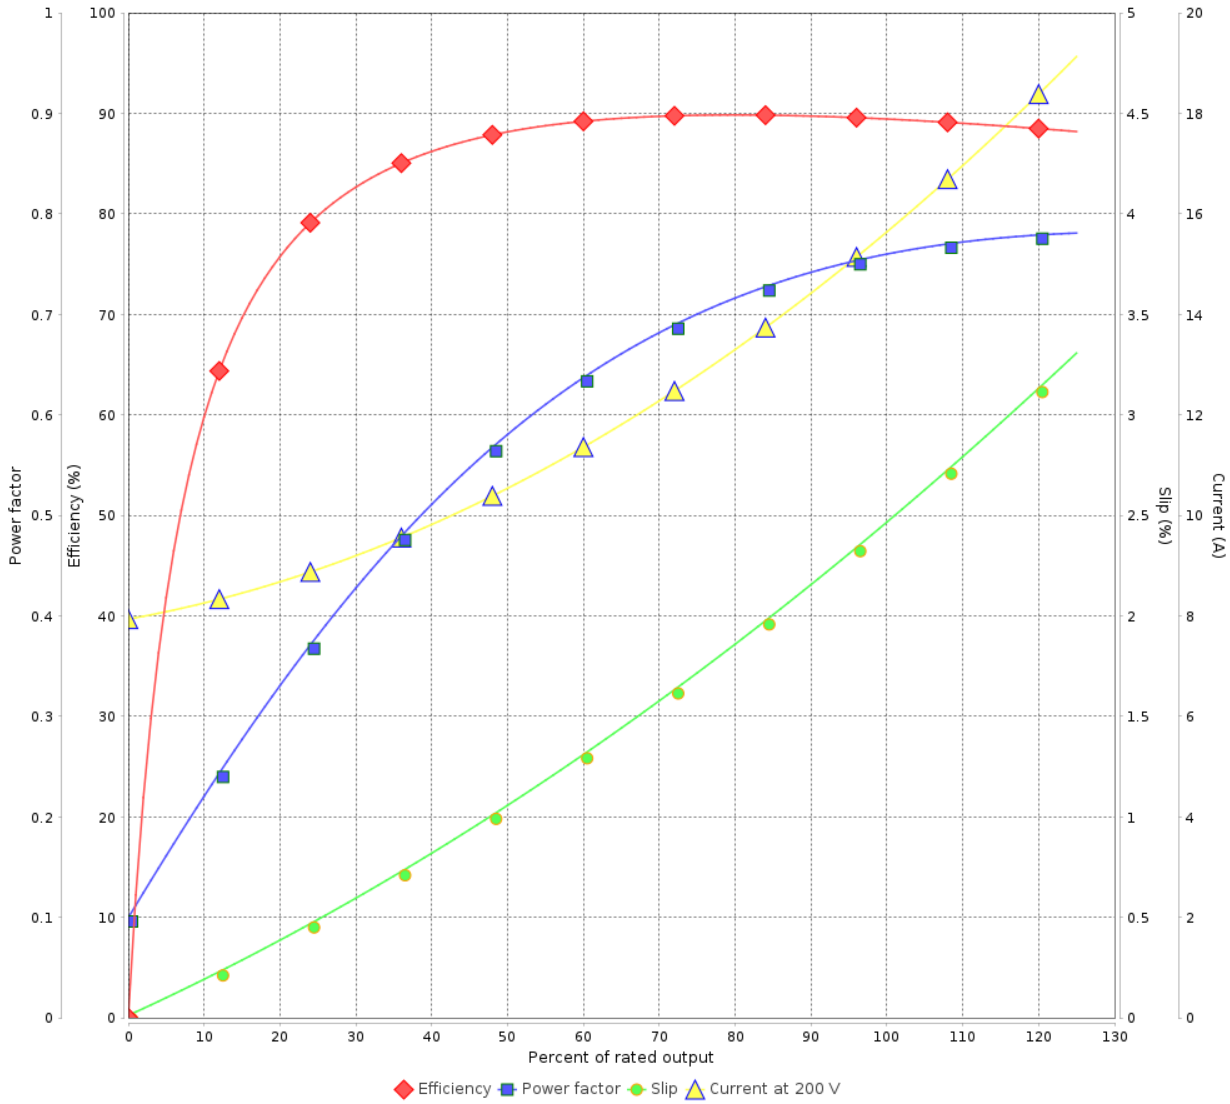

Performance : 200 V 60 Hz 6P

Rated current	: 15.7 A	Moment of inertia (J)	: 0.0620 kgm ²
LRC	: 6.8	Duty cycle	: Cont.(S1)
Rated torque	: 3.10 kgfm	Insulation class	: F
Locked rotor torque	: 170 %	Service factor	: 1.25
Breakdown torque	: 260 %	Temperature rise	: 80 K
Rated speed	: 1170 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		2 / 2		
Date	22/10/2024			

