

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 11943143

Frame	: 364/5T	Locked rotor time	: 46s (cold) 26s (hot)
Output	: 40 HP (30 kW)	Temperature rise	: 80 K
Poles	: 8	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 40.7 A	Protection degree	: IP55
L. R. Amperes	: 240 A	Cooling method	: IC411 - TEFC
LRC	: 5.9x(Code G)	Mounting	: F-1
No load current	: 17.2 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 882 rpm	Noise level <sup>2</sup>	: 60.0 dB(A)
Slip	: 2.00 %	Starting method	: Direct On Line
Rated torque	: 32.9 kgfm	Approx. weight <sup>3</sup>	: 399 kg
Locked rotor torque	: 170 %		
Breakdown torque	: 210 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 1.22 kgm <sup>2</sup>		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	92.4	93.0	92.4	Max. traction	: 577 kgf
Power Factor	0.65	0.75	0.80	Max. compression	: 975 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
8.1	7.1	6.5	3.6	2.6	1.6	1.2

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6314 C3	6314 C3
Sealing	:	Taconite Labyrinth	Taconite Labyrinth
Lubrication interval	:	20000 h	20000 h
Lubricant amount	:	27 g	27 g
Lubricant type	:	Mobil Polyrex EM	

### Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	22/10/2024			

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase      Product code : 11943143


LOAD PERFORMANCE CURVE

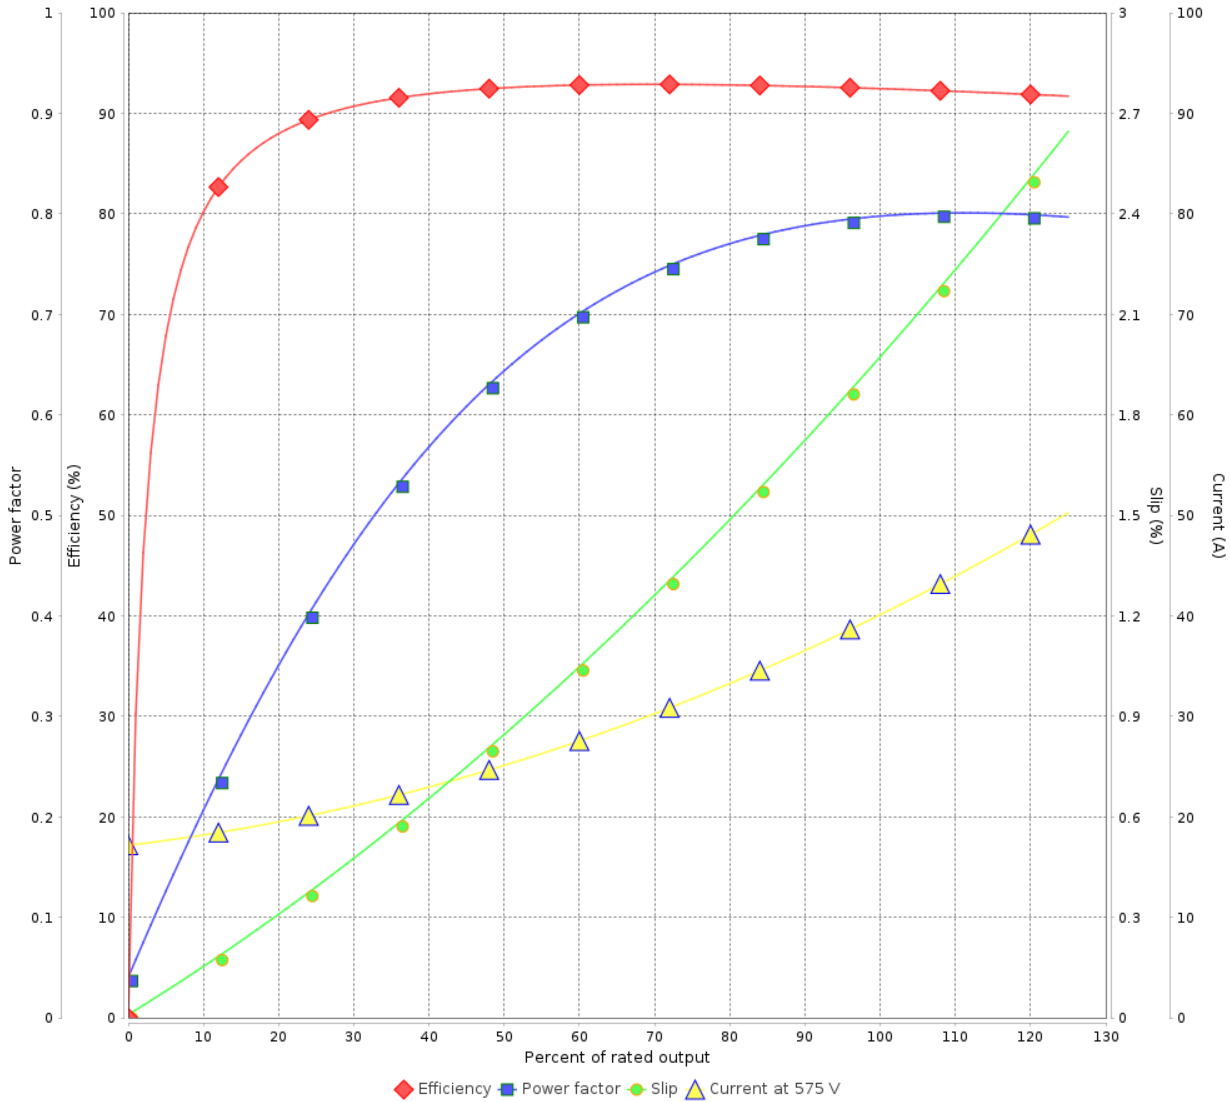

Performance : 575 V 60 Hz 8P

Rated current	: 40.7 A	Moment of inertia (J)	: 1.22 kgm <sup>2</sup>
LRC	: 5.9	Duty cycle	: Cont.(S1)
Rated torque	: 32.9 kgfm	Insulation class	: F
Locked rotor torque	: 170 %	Service factor	: 1.25
Breakdown torque	: 210 %	Temperature rise	: 80 K
Rated speed	: 882 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	22/10/2024			

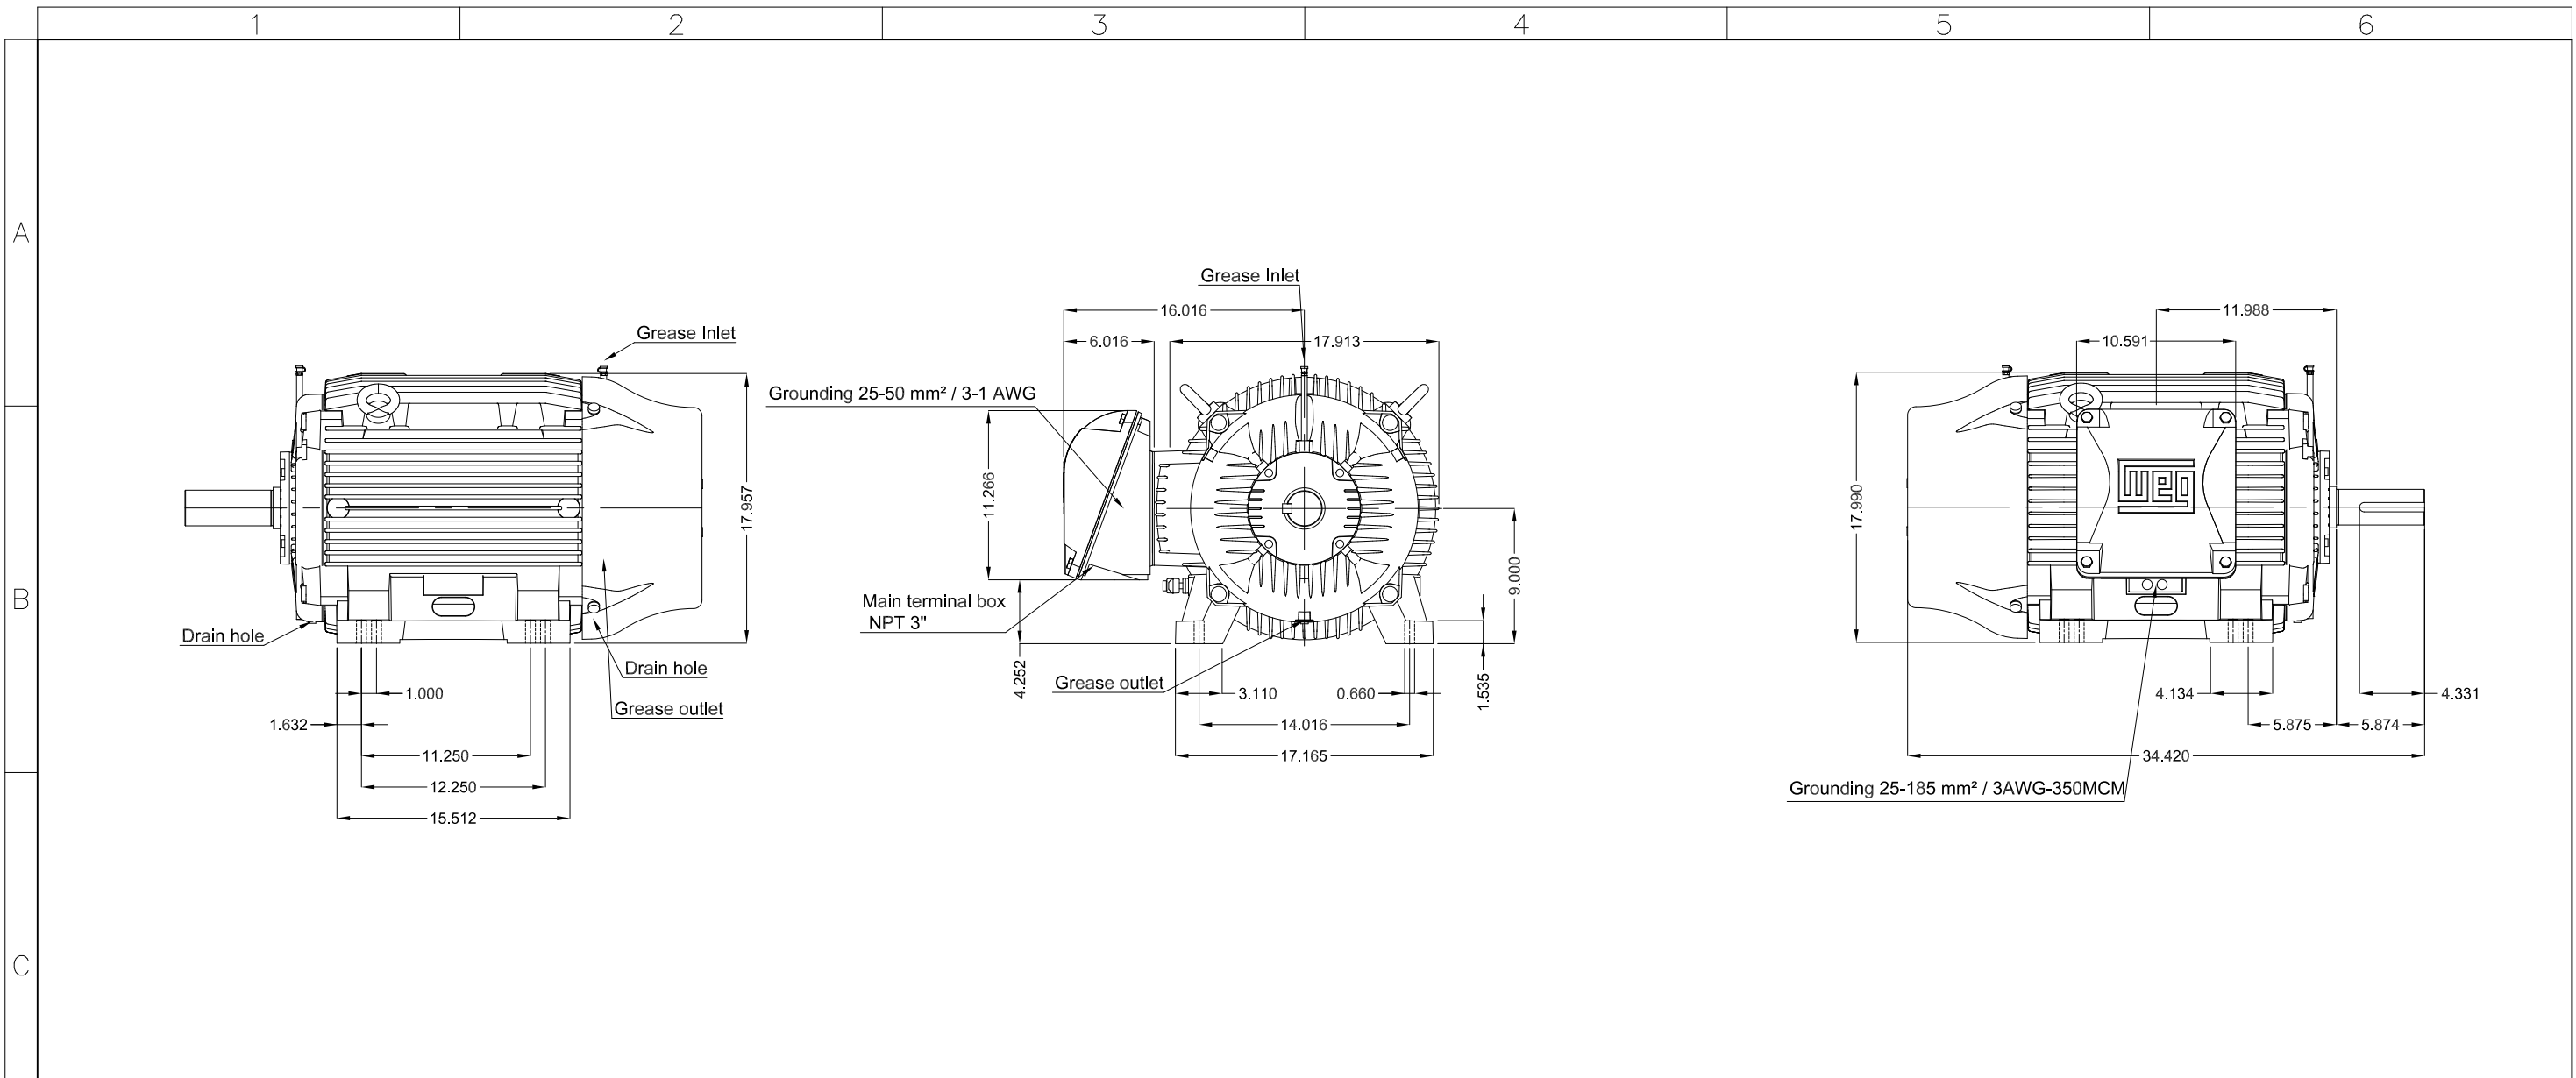

D																			
	40 HP 08 Poles 60 Hz																		
E	Without vertical jackscrews																		
	Sealing - Taconite labyrinth																		
	Grease outlet according to IEEE841																		
	Color RAL 5009																		
	Painting plan 222E																		
Mounting B3R(D)																			
<table border="1"> <tr> <td colspan="2">DE Shaft End</td> <td colspan="2"> </td> <td colspan="2">DUNC 3/4"-10 WEG WPR-7339</td> <td colspan="4"></td> </tr> </table>										DE Shaft End				DUNC 3/4"-10 WEG WPR-7339					
DE Shaft End				DUNC 3/4"-10 WEG WPR-7339															

ECM		LOC		SUMMARY OF MODIFICATIONS		HYBRISUSER		00	
EXECUTED	HYBRISUSER	THREE PH. MOTOR IEEE 841 W22 NEMA PREM. EFF.		EXECUTED	CHECKED	RELEASED	DATE	VER	
CHECKED		FRAME 364/5T IP55 TEFC							
RELEASED									
REL. DATE									

**PREVIEW**

WDD 00

SHEET /