

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Close Coupled Pump NEMA Premium Efficiency Three-Phase Product code : 12032545

Frame	: 324JP	Locked rotor time	: 50s (cold) 28s (hot)
Output	: 40 HP (30 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 38.6 A	Protection degree	: IP23
L. R. Amperes	: 239 A	Cooling method	: IC01 - ODP
LRC	: 6.2x(Code G)	Mounting	: W-6
No load current	: 14.8 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1775 rpm	Noise level ²	: 64.0 dB(A)
Slip	: 1.39 %	Starting method	: Direct On Line
Rated torque	: 16.4 kgfm	Approx. weight ³	: 219 kg
Locked rotor torque	: 220 %		
Breakdown torque	: 229 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.2551 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	93.6	94.1	94.1	Max. traction	: 364 kgf
Power Factor	0.68	0.78	0.83	Max. compression	: 583 kgf

	Drive end	Non drive end
Bearing type	: 6312 Z C3	6212 Z C3
Sealing	: Without Bearing Seal	Without Bearing Seal
Lubrication interval	: 20000 h	20000 h
Lubricant amount	: 21 g	13 g
Lubricant type	: Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/01/2024		1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Close Coupled Pump NEMA Premium
Efficiency Three-Phase

Product code : 12032545

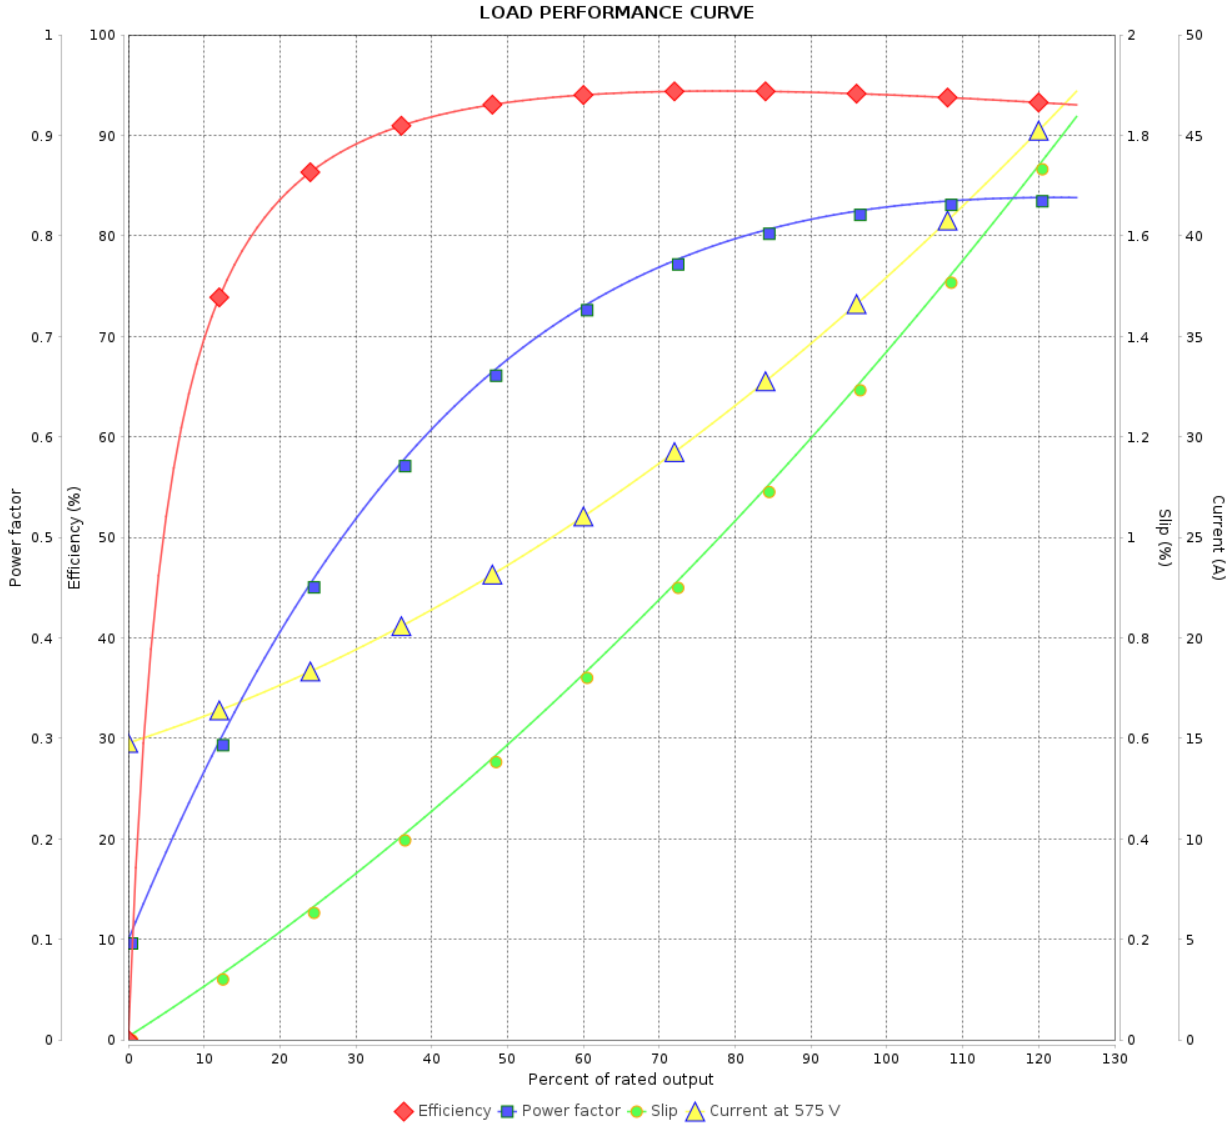

Performance : 575 V 60 Hz 4P

Rated current	: 38.6 A	Moment of inertia (J)	: 0.2551 kgm ²
LRC	: 6.2	Duty cycle	: Cont.(S1)
Rated torque	: 16.4 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.15
Breakdown torque	: 229 %	Temperature rise	: 80 K
Rated speed	: 1775 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	14/01/2024			

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : Close Coupled Pump NEMA Premium Efficiency Three-Phase Product code : 12032545

Frame	: 324JP	Locked rotor time	: 50s (cold) 28s (hot)
Output	: 40 HP (30 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 38.6 A	Protection degree	: IP23
L. R. Amperes	: 239 A	Cooling method	: IC01 - ODP
LRC	: 6.2x(Code G)	Mounting	: W-6
No load current	: 14.8 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1775 rpm	Noise level ²	: 64.0 dB(A)
Slip	: 1.39 %	Starting method	: Direct On Line
Rated torque	: 16.4 kgfm	Approx. weight ³	: 219 kg
Locked rotor torque	: 220 %		
Breakdown torque	: 229 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.2551 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	93.6	94.1	94.1	Max. traction	: 364 kgf
Power Factor	0.68	0.78	0.83	Max. compression	: 583 kgf

	Drive end	Non drive end
Bearing type	: 6312 Z C3	6212 Z C3
Sealing	: Without Bearing Seal	Without Bearing Seal
Lubrication interval	: 20000 h	20000 h
Lubricant amount	: 21 g	13 g
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	24/10/2024			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Close Coupled Pump NEMA Premium Efficiency Three-Phase Product code : 12032545

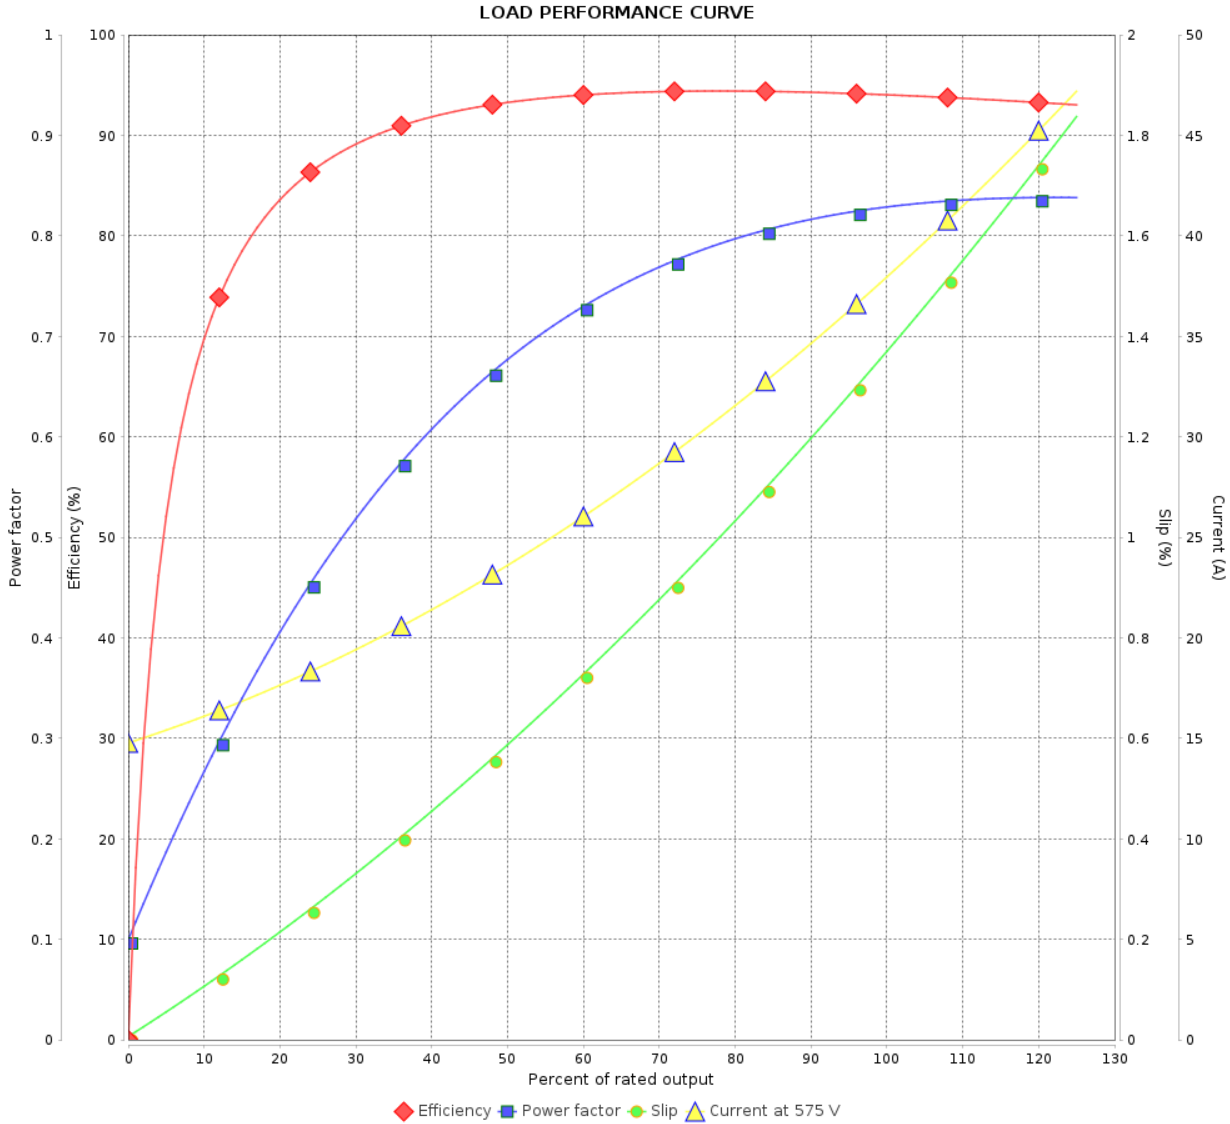

Performance : 575 V 60 Hz 4P

Rated current	: 38.6 A	Moment of inertia (J)	: 0.2551 kgm ²
LRC	: 6.2	Duty cycle	: Cont.(S1)
Rated torque	: 16.4 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.15
Breakdown torque	: 229 %	Temperature rise	: 80 K
Rated speed	: 1775 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	24/10/2024			

