

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11856675

Frame	: 143/5TC	Locked rotor time	: 25s (cold) 14s (hot)
Output	: 3 HP (2.2 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 2.97 A	Protection degree	: IP55
L. R. Amperes	: 24.0 A	Cooling method	: IC411 - TEFC
LRC	: 8.1x(Code J)	Mounting	: F-1
No load current	: 1.04 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 3460 rpm	Noise level <sup>2</sup>	: 68.0 dB(A)
Slip	: 3.89 %	Starting method	: Direct On Line
Rated torque	: 0.629 kgfm	Approx. weight <sup>3</sup>	: 25.6 kg
Locked rotor torque	: 330 %		
Breakdown torque	: 360 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0026 kgm <sup>2</sup>		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	85.5	86.5	86.5	Max. traction	: 52 kgf
Power Factor	0.70	0.81	0.86	Max. compression	: 77 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
14.8	12.3	11.7	6.8	4.3	2.6	1.7

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6205 ZZ	6204 ZZ
Sealing	:	V'Ring	V'Ring
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	00088	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2 Revision		
Checked by				
Date	13/11/2025			

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency  
Three-Phase

Product code : 11856675



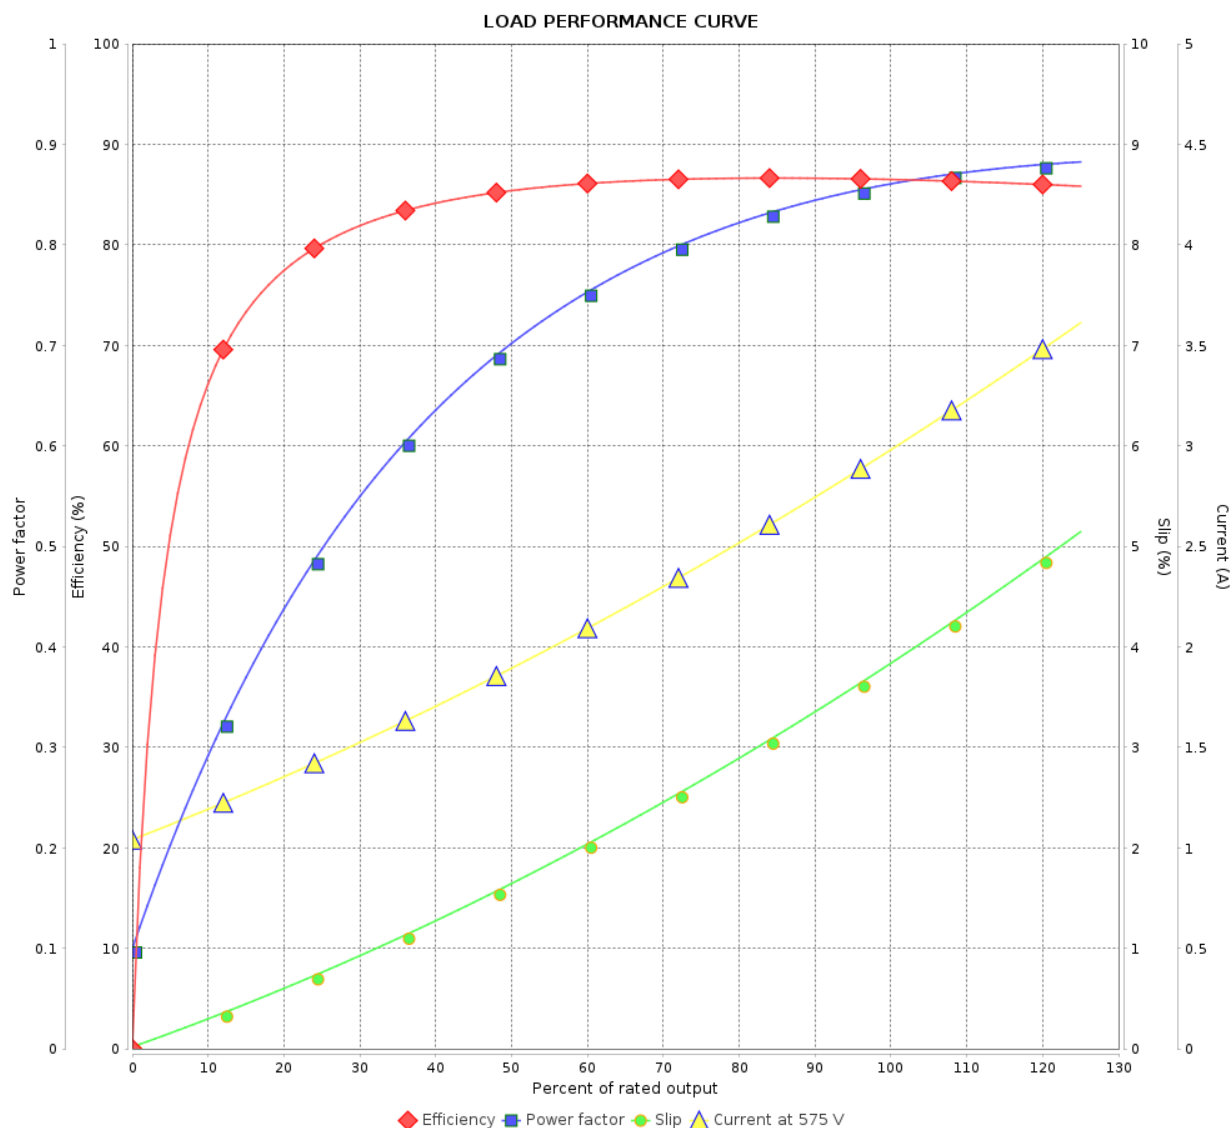


Performance : 575 V 60 Hz 2P



Rated current : 2.97 A  
LRC : 8.1  
Rated torque : 0.629 kgfm  
Locked rotor torque : 330 %  
Breakdown torque : 360 %  
Rated speed : 3460 rpm

Moment of inertia (J) : 0.0026 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.25  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

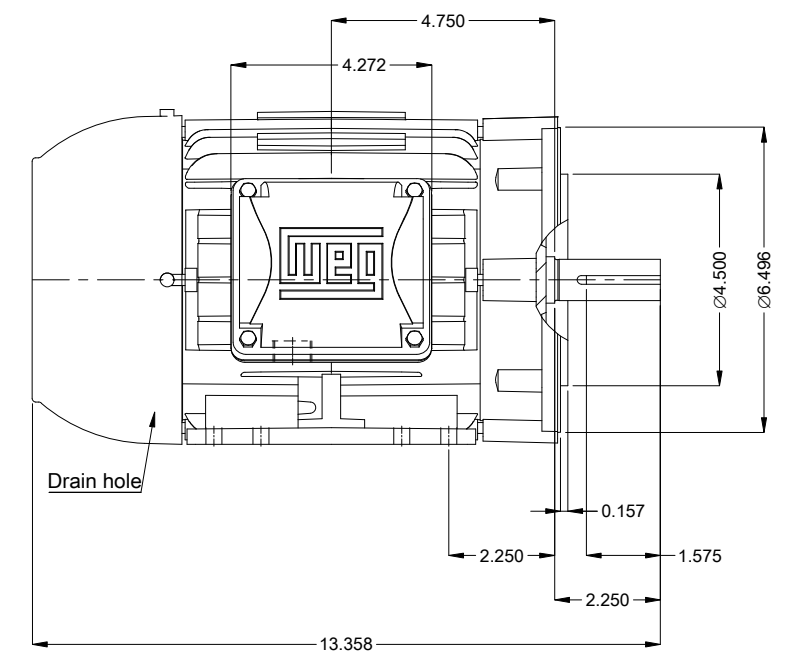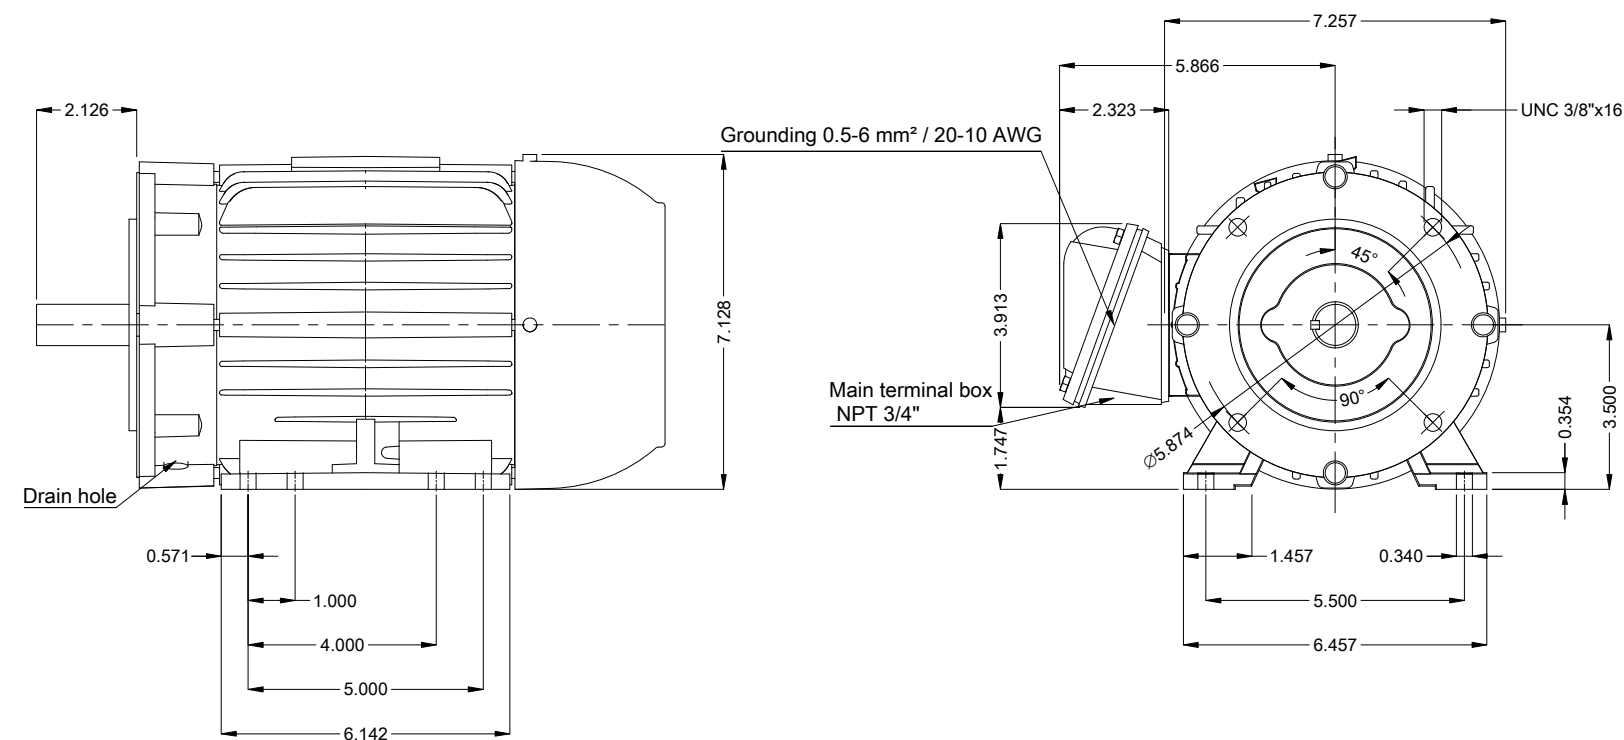

Color RAL 5009
Painting plan 207A
Mounting B34D

3 HP   02 Poles   60 Hz										A
Scale 1 : 4										
						HYBRISUSER				00
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		THREE PH. MOTOR W22 NEMA PREM. EFF. FRAME 143/5TC IP55 TEFC				PREVIEW WDD   00			
CHECKED										
RELEASED										
REL. DATE										
						SHEET		1 / 1		