

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line	: Standard Efficiency Three-Phase	Product code :	13286641	
Frame	: 56	Cooling method	: IC01 - ODP	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ²	: 9.4 kg	
		Moment of inertia (J)	: 0.0025 kgm ²	
Output [HP]	0.75	0.75	0.75	
Poles	4	4	4	
Frequency [Hz]	60	50	50	
Rated voltage [V]	208-230/460	190/380	220/415	
Rated current [A]	2.96-2.68/1.34	2.84/1.42	2.85/1.51	
L. R. Amperes [A]	18.7-16.9/8.44	14.8/7.38	15.4/8.15	
LRC [A]	6.3x(Code K)	5.2x(Code H)	5.4x(Code J)	
No load current [A]	1.90-2.20/1.10	2.00/1.00	2.63/1.40	
Rated speed [RPM]	1755	1435	1450	
Slip [%]	2.50	4.33	3.33	
Rated torque [kgfm]	0.310	0.379	0.375	
Locked rotor torque [%]	229	160	200	
Breakdown torque [%]	300	220	270	
Service factor		1.15	1.15	
Temperature rise	80 K	80 K	80 K	
Locked rotor time	23s (cold) 13s (hot)	0s (cold) 0s (hot)	0s (cold) 0s (hot)	
Noise level ²	52.0 dB(A)	49.0 dB(A)	49.0 dB(A)	
Efficiency (%)	25%			
	50%	66.0	61.9	
	75%	72.0	69.5	
	100%	75.5	72.5	
Power Factor	25%			
	50%	0.45	0.45	
	75%	0.58	0.59	
	100%	0.68	0.70	
Bearing type	: <u>Drive end</u> 6203 ZZ <u>Non drive end</u> 6202 ZZ	Foundation loads		
Sealing	: Without Without Bearing Seal Bearing Seal	Max. traction	: 28 kgf	
Lubrication interval	: - -	Max. compression	: 37 kgf	
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes USABLE @208V SF 1.00				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 4	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase Product code : 13286641

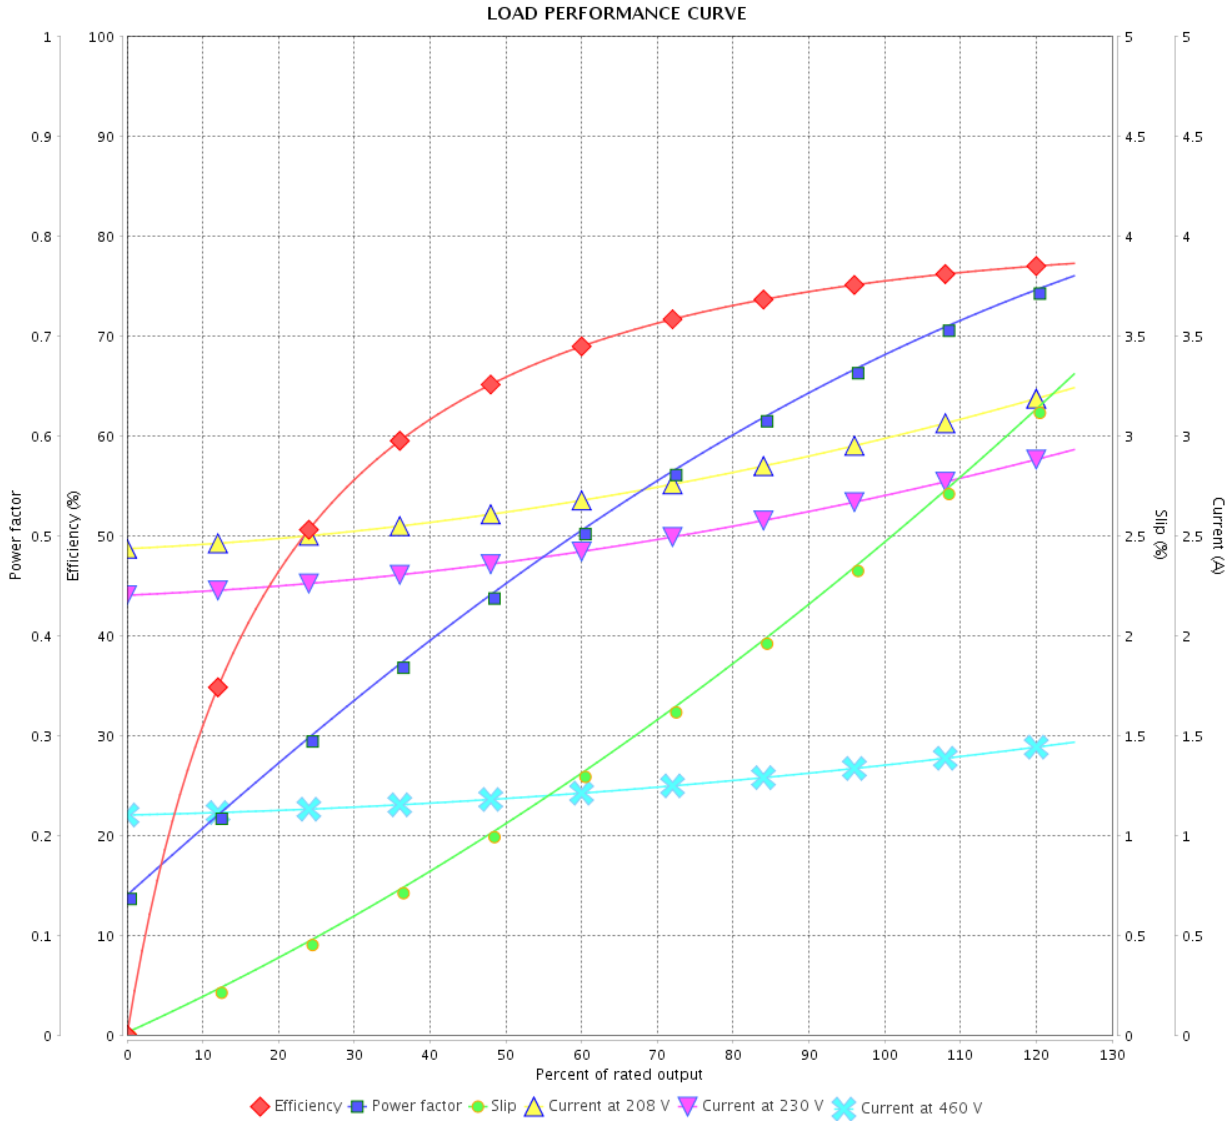

Performance : 208-230/460 V 60 Hz 4P

Rated current : 2.96-2.68/1.34 A
 LRC : 6.3
 Rated torque : 0.310 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 300 %
 Rated speed : 1755 rpm

Moment of inertia (J) : 0.0025 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Standard Efficiency Three-Phase Product code : 13286641

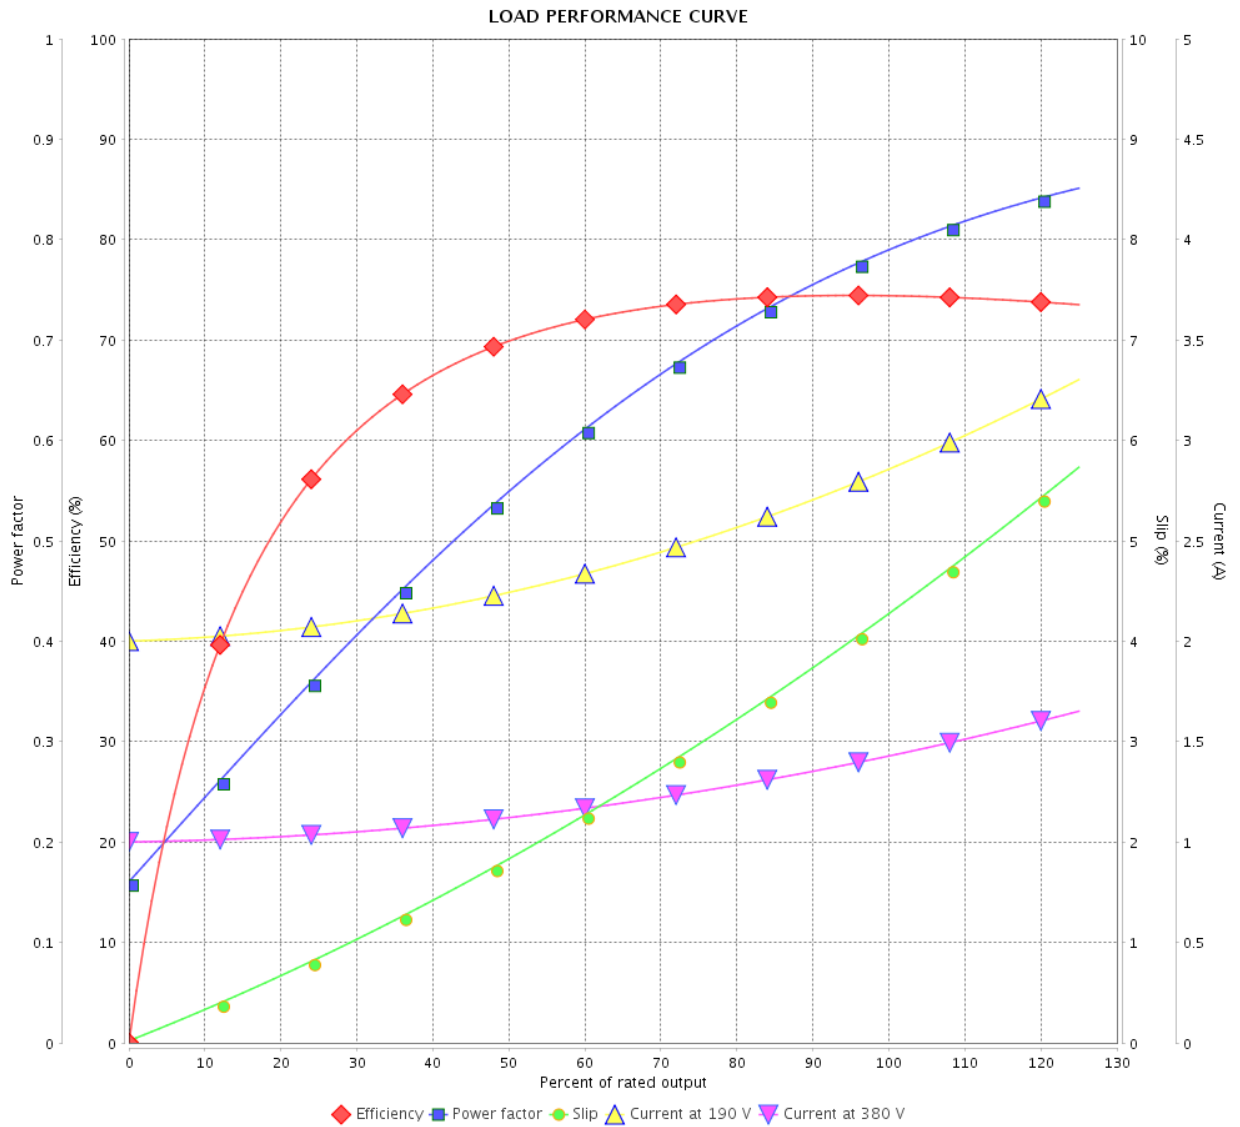

Performance : 190/380 V 50 Hz 4P

Rated current : 2.84/1.42 A
 LRC : 5.2
 Rated torque : 0.379 kgfm
 Locked rotor torque : 160 %
 Breakdown torque : 220 %
 Rated speed : 1435 rpm

Moment of inertia (J) : 0.0025 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				
			3 / 4	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase Product code : 13286641

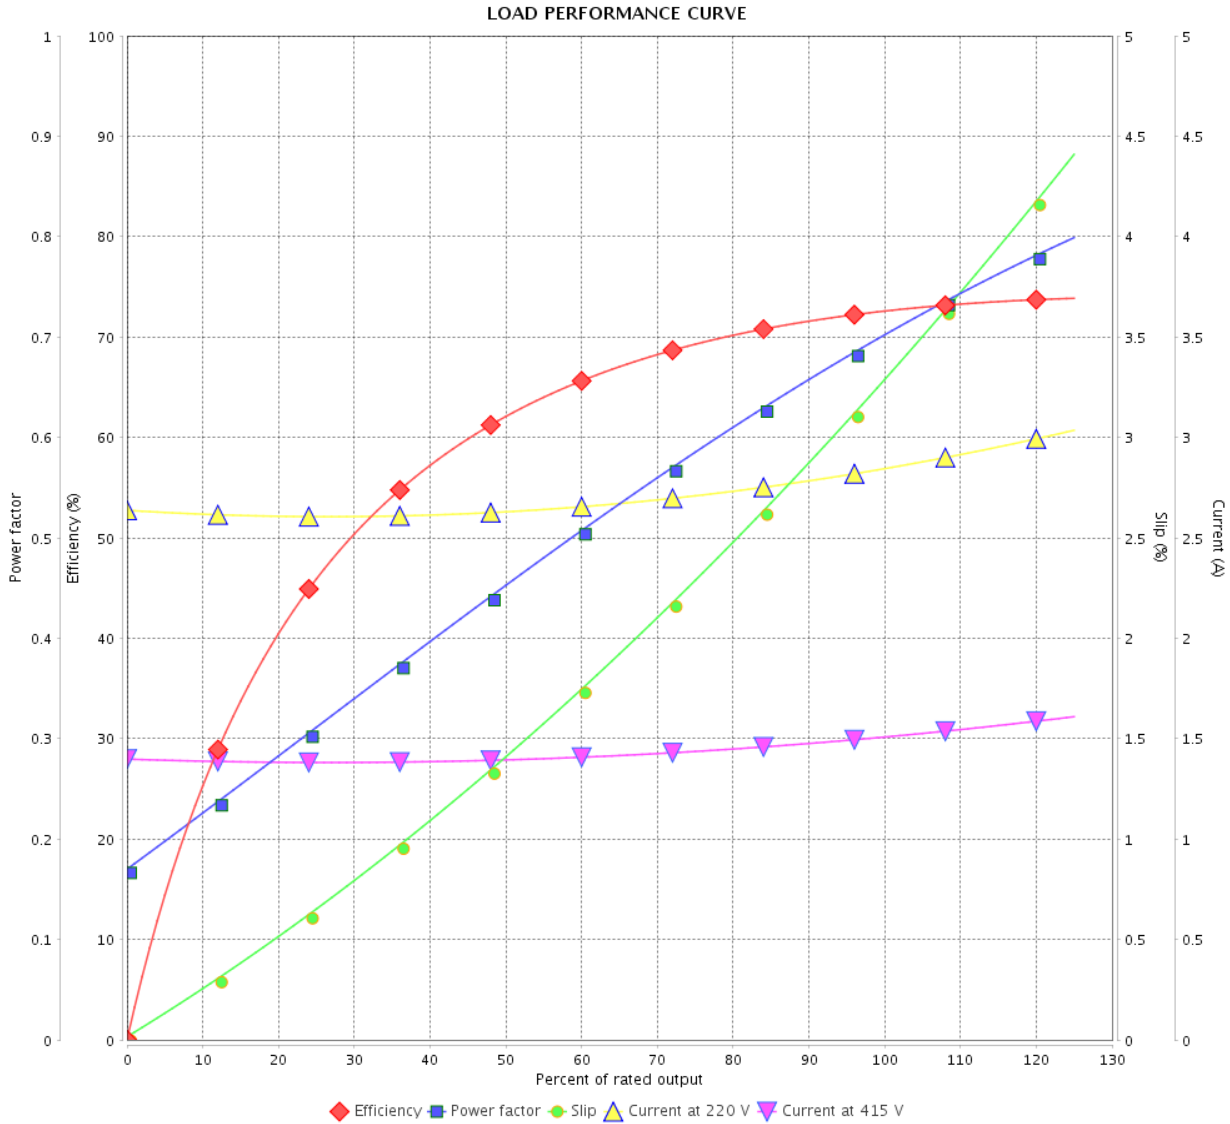

Performance : 220/415 V 50 Hz 4P

Rated current : 2.85/1.51 A
 LRC : 5.4
 Rated torque : 0.375 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 270 %
 Rated speed : 1450 rpm

Moment of inertia (J) : 0.0025 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 4	Revision
Checked by				
Date	17/05/2022			

1 2 3 4 5 6



A

B

C

D

E

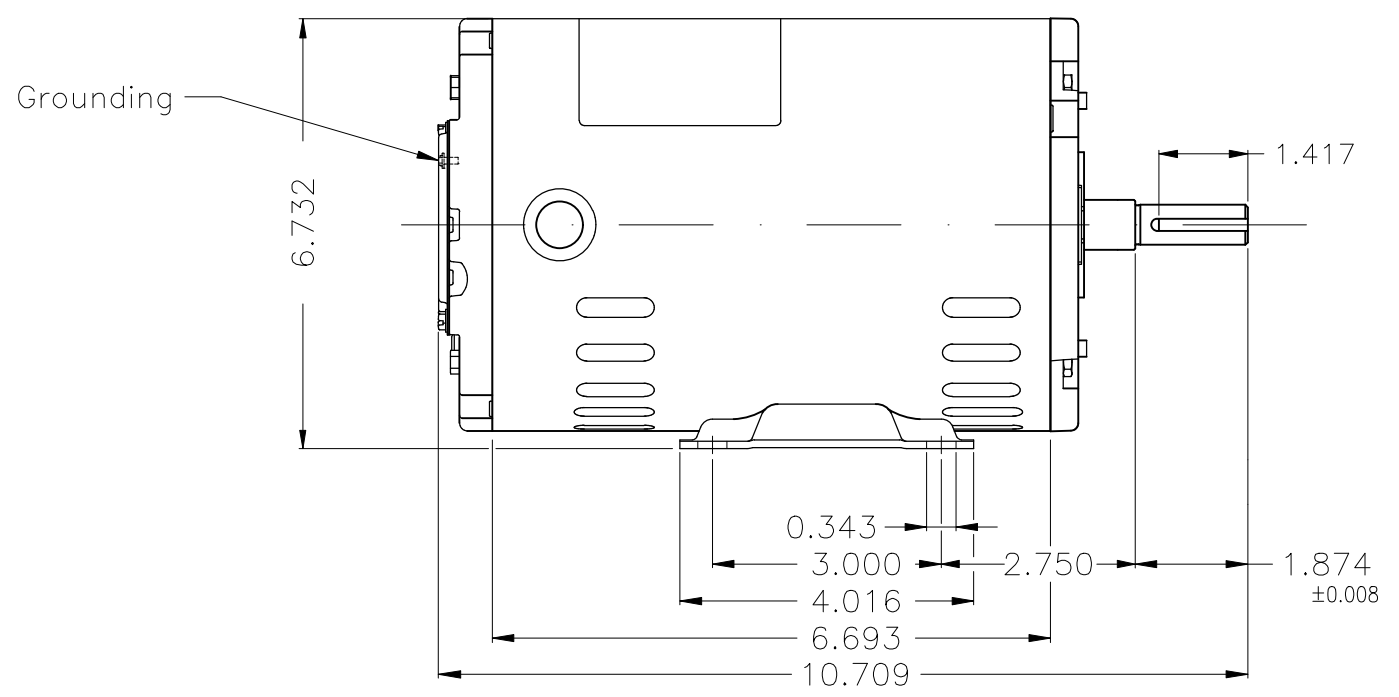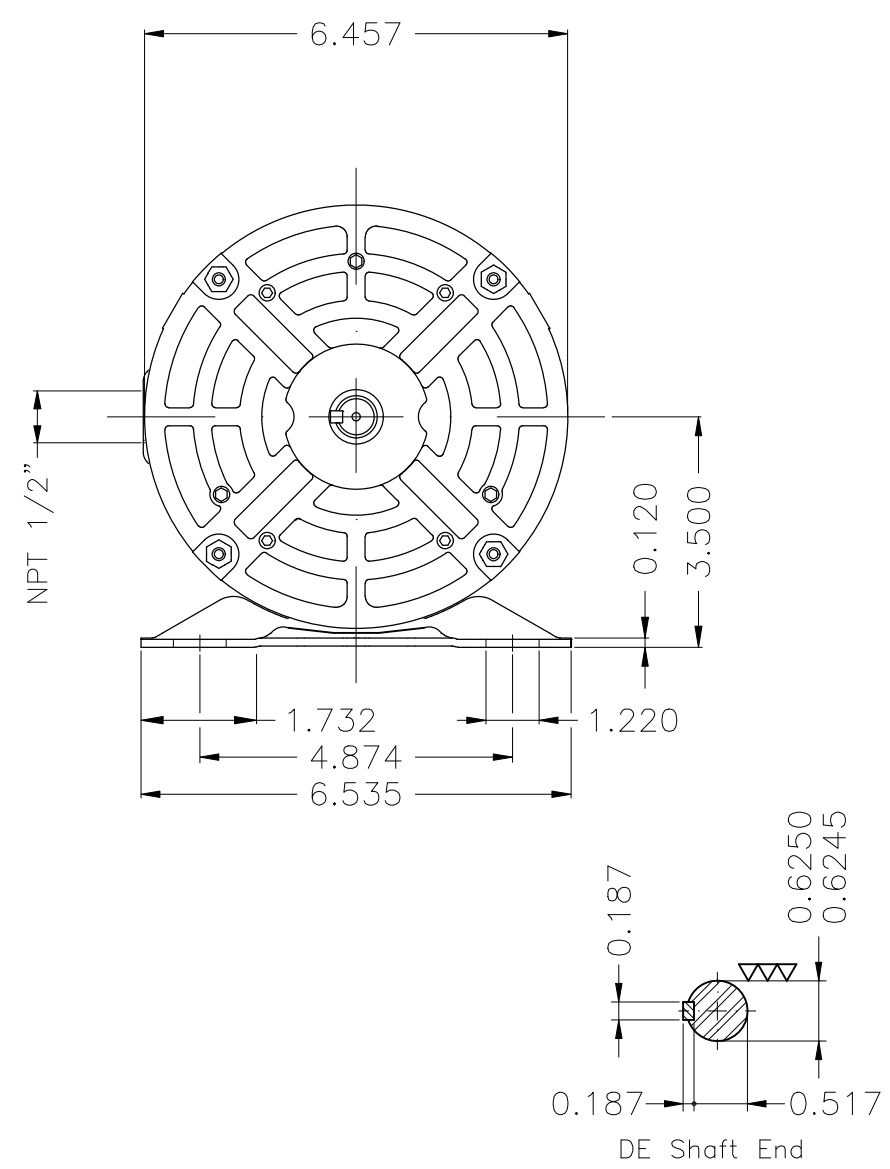

Color Munsell N 1 matte black									
Painting plan 207N									
Mounting F-1/B3R(D)									
					HYBRISUSER	00			
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR ROLLED STEEL				PREVIEW			
CHECKED		FRAME 56 IP21 ODP				WDD	00		
RELEASED						SHEET	1 / 1		
REL. DATE		WMO	Jaragua do Sul	Product Engineering					

0.75 HP 04 Poles 60 Hz

A