

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Explosion Proof Standard Efficiency Three-Phase Product code : 10627444

Frame	: A56CEX	Locked rotor time	: 27s (cold) 15s (hot)
Output	: 0.33 HP (0.25 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 0.520 A	Protection degree	: IP44
L. R. Amperes	: 2.70 A	Cooling method	: IC411 - TEFC
LRC	: 5.2x(Code K)	Mounting	: F-1
No load current	: 0.400 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 1750 rpm	Noise level <sup>2</sup>	: 50.0 dB(A)
Slip	: 2.78 %	Starting method	: Direct On Line
Rated torque	: 0.137 kgfm	Approx. weight <sup>3</sup>	: 14.2 kg
Locked rotor torque	: 240 %		
Breakdown torque	: 300 %		
Insulation class	: B		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0026 kgm <sup>2</sup>		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	66.0	72.0	74.0	Max. traction	: 6 kgf
Power Factor	0.43	0.50	0.65	Max. compression	: 20 kgf

	Drive end	Non drive end
Bearing type	: 6203 ZZ	: 6203 ZZ
Sealing	: Without Bearing Seal	: Without Bearing Seal
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	: Mobil Polyrex EM	

### Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 3 Revision		
Checked by				
Date	26/10/2024			

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	130 °C

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 3Revision	
Checked by					
Date	26/10/2024				


# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Explosion Proof Standard Efficiency Three-Phase      Product code : 10627444

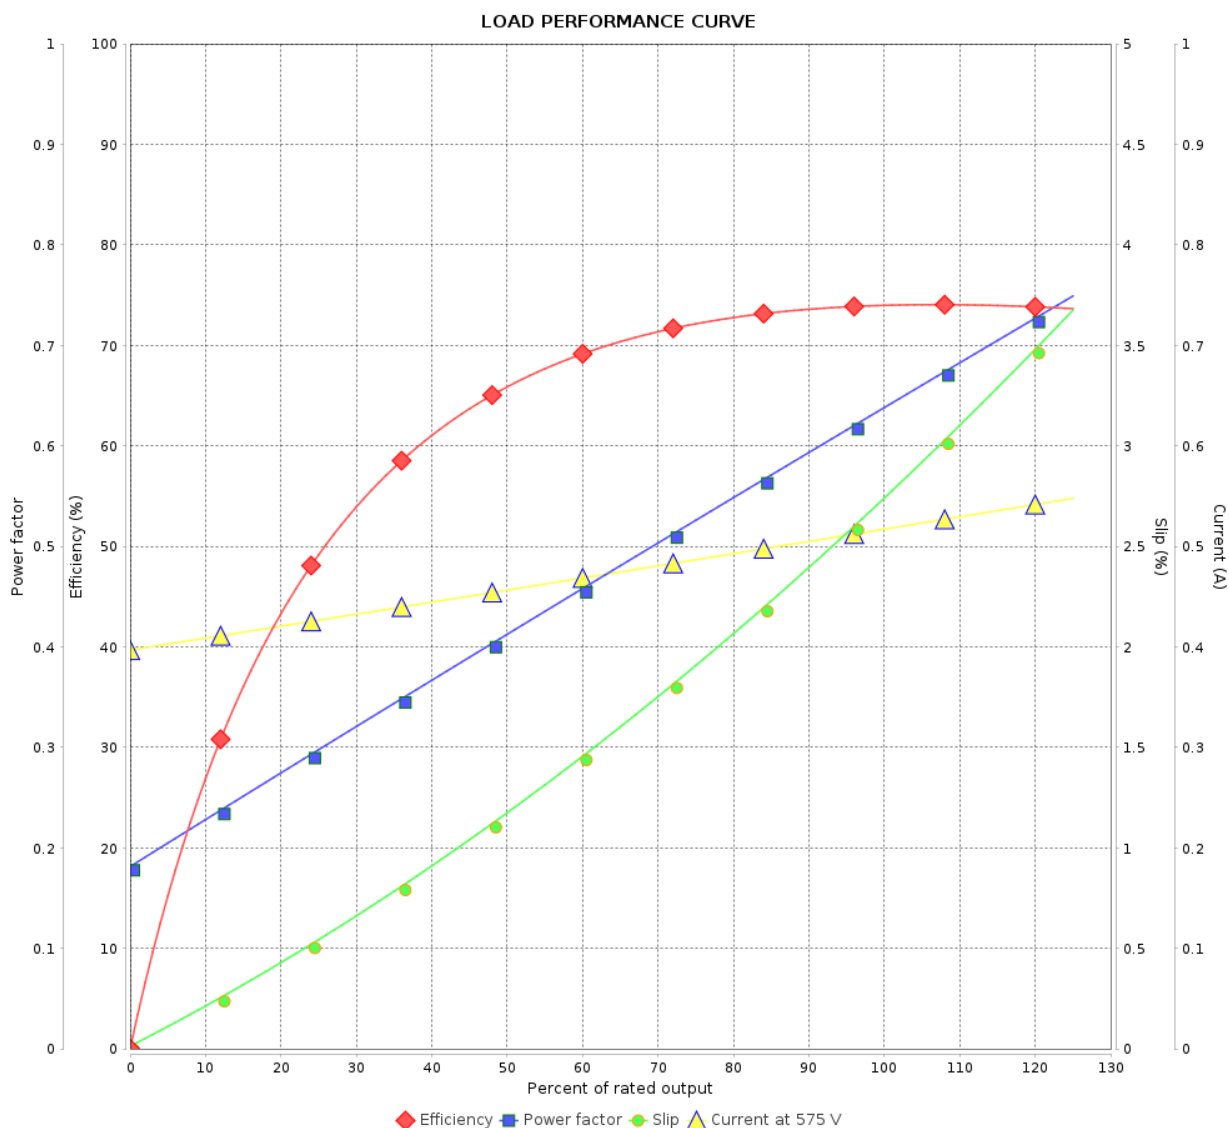

Performance : 575 V 60 Hz 4P

Rated current : 0.520 A  
LRC : 5.2  
Rated torque : 0.137 kgfm  
Locked rotor torque : 240 %  
Breakdown torque : 300 %  
Rated speed : 1750 rpm

Moment of inertia (J) : 0.0026 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : B  
Service factor : 1.15  
Temperature rise : 80 K

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				3 / 3	
Date					

