

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : Explosion Proof Standard Efficiency Three-Phase Product code : 10674709

Frame	: B56EX	Locked rotor time	: 27s (cold) 15s (hot)
Output	: 0.75 HP (0.550 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 208-230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 2.57-2.32/1.16 A	Protection degree	: IP44
L. R. Amperes	: 14.6-13.2/6.61 A	Cooling method	: IC411 - TEFC
LRC	: 5.7x(Code H)	Mounting	: F-1
No load current	: 1.55-1.40/0.700 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 1730 rpm	Noise level <sup>2</sup>	: 50.0 dB(A)
Slip	: 3.89 %	Starting method	: Direct On Line
Rated torque	: 0.315 kgfm	Approx. weight <sup>3</sup>	: 16.7 kg
Locked rotor torque	: 240 %		
Breakdown torque	: 280 %		
Insulation class	: B		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0041 kgm <sup>2</sup>		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	77.0	80.0	81.5	Max. traction	: 20 kgf
Power Factor	0.53	0.66	0.74	Max. compression	: 36 kgf

	Drive end	Non drive end
Bearing type	: 6203 ZZ	: 6203 ZZ
Sealing	: Without Bearing Seal	: Without Bearing Seal
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	: Mobil Polyrex EM	

Notes  
USABLE @208V SF 1.00

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	26/10/2024			
			Page	Revision
			1 / 3	

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

### Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	130 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	26/10/2024		2 / 3	


# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : Explosion Proof Standard Efficiency Three-Phase      Product code : 10674709

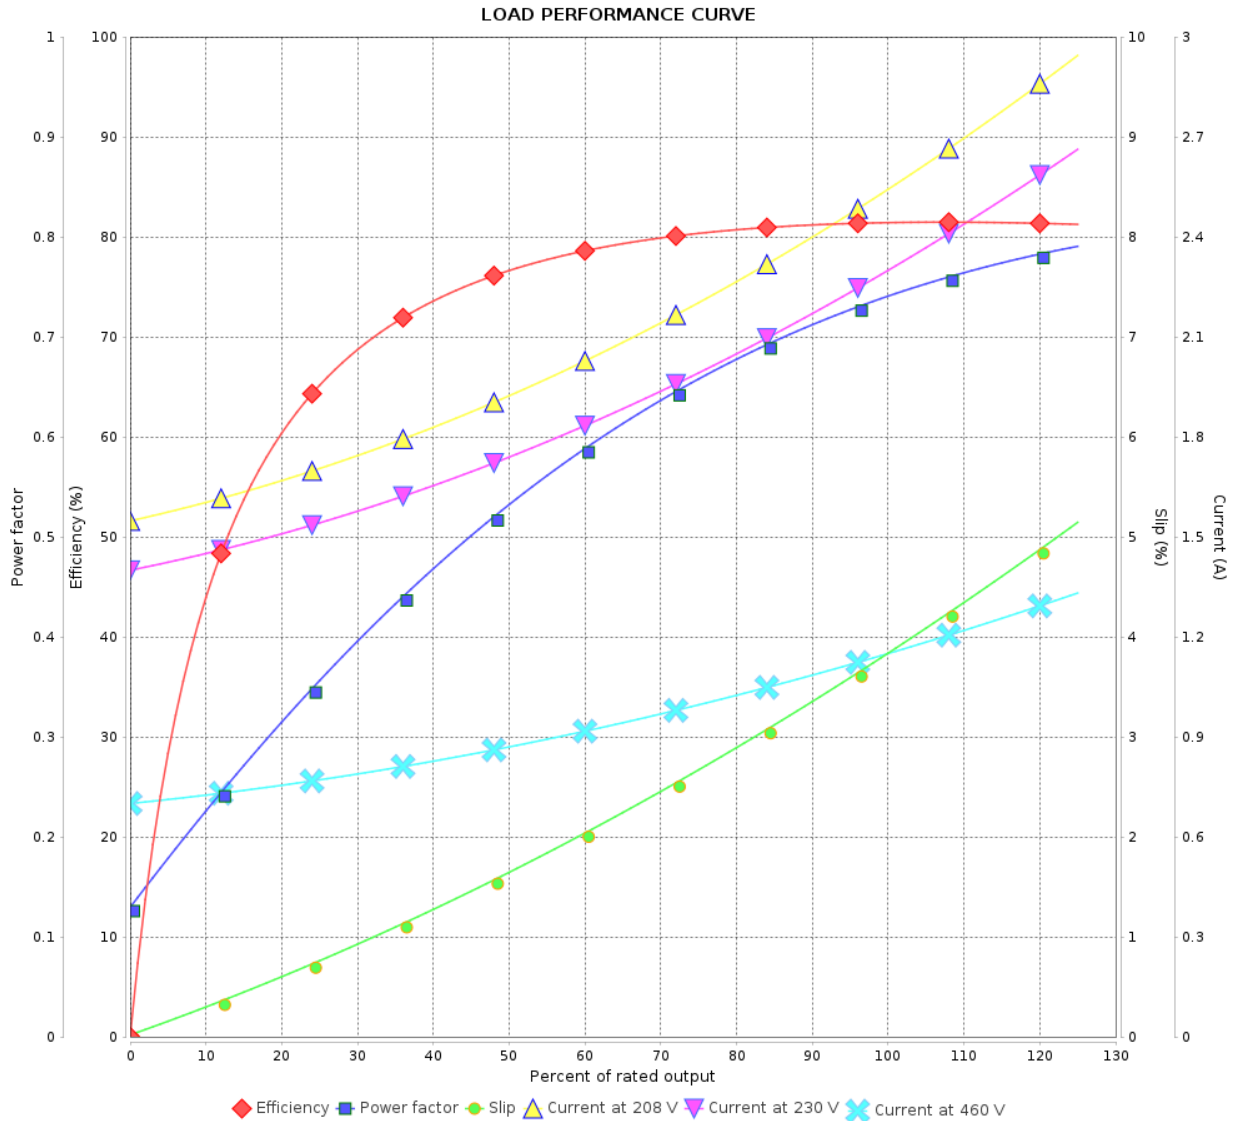


Performance : 208-230/460 V 60 Hz 4P

Rated current : 2.57-2.32/1.16 A  
 LRC : 5.7  
 Rated torque : 0.315 kgfm  
 Locked rotor torque : 240 %  
 Breakdown torque : 280 %  
 Rated speed : 1730 rpm

Moment of inertia (J) : 0.0041 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : B  
 Service factor :  
 Temperature rise : 80 K


Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 3	Revision
Checked by				
Date	26/10/2024			

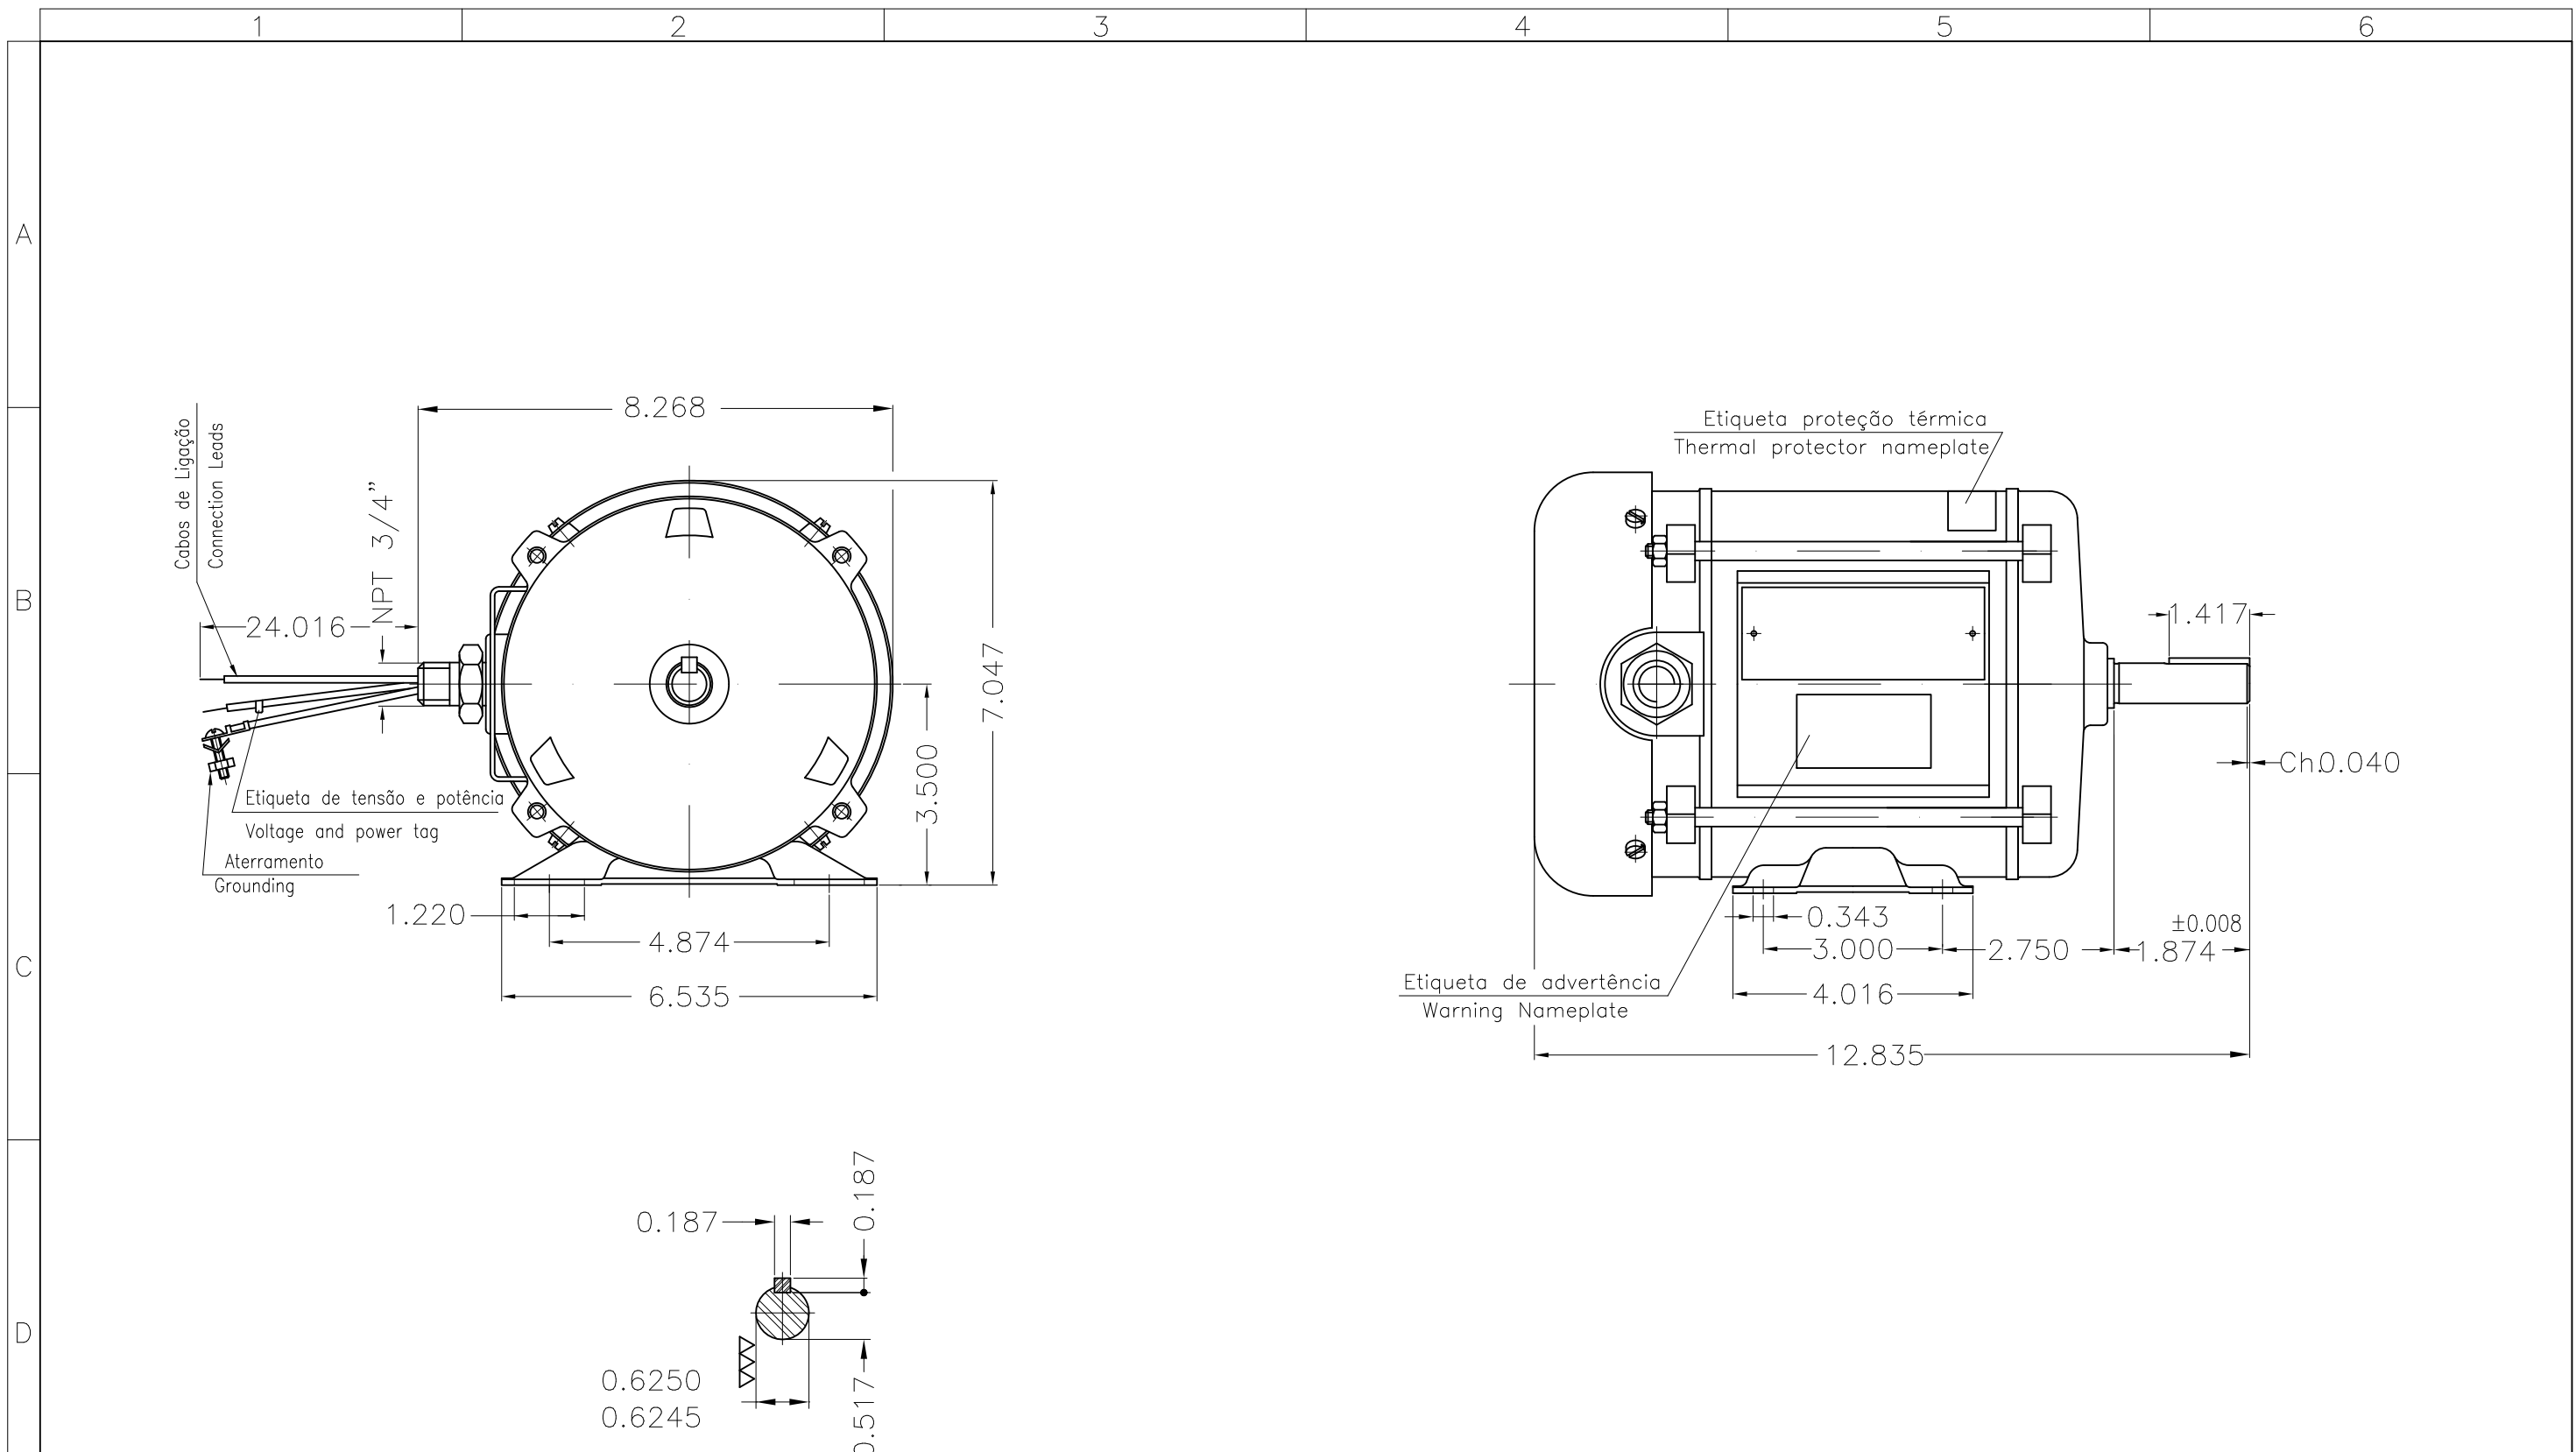

E

0.75 HP 04 Poles 60 Hz

Mounting B3R(D)						
ECM	LOC	SUMMARY OF MODIFICATIONS			DATE	VER
EXECUTED	HYBRISUSER					00
CHECKED						
RELEASED						
REL. DATE	WMO	Jaragua do Sul	Product Engineering	HYBRISUSER	WDD	00



PREVIEW

1 / 1

