

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer	:			
Product line	: Standard Efficiency Three-Phase	Product code : 13915004		
Frame	: 56	Cooling method : IC01 - ODP		
Insulation class	: F	Mounting : F-1		
Duty cycle	: Cont.(S1)	Rotation ¹ : Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method : Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³ : 10.1 kg		
Design	: A	Moment of inertia (J) : 0.0030 kgm ²		
Output [HP]		1		
Poles		4		
Frequency [Hz]		60		
Rated voltage [V]		208		
Rated current [A]		3.98		
L. R. Amperes [A]		26.3		
LRC [A]		6.6x(Code L)		
No load current [A]		2.41		
Rated speed [RPM]		1750		
Slip [%]		2.78		
Rated torque [kgfm]		0.415		
Locked rotor torque [%]		250		
Breakdown torque [%]		290		
Service factor				
Temperature rise		80 K		
Locked rotor time		18s (cold) 10s (hot)		
Noise level ²		52.0 dB(A)		
Efficiency (%)	25%			
	50%	68.0		
	75%	74.0		
	100%	77.0		
Power Factor	25%			
	50%	0.44		
	75%	0.58		
	100%	0.68		
Bearing type	: <u>Drive end</u> 6204 ZZ <u>Non drive end</u> 6202 ZZ	Foundation loads		
Sealing	: Without Without Bearing Seal Bearing Seal	Max. traction : 33 kgf Max. compression : 43 kgf		
Lubrication interval	: - -			
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	11/05/2022		1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase Product code : 13915004

LOAD PERFORMANCE CURVE

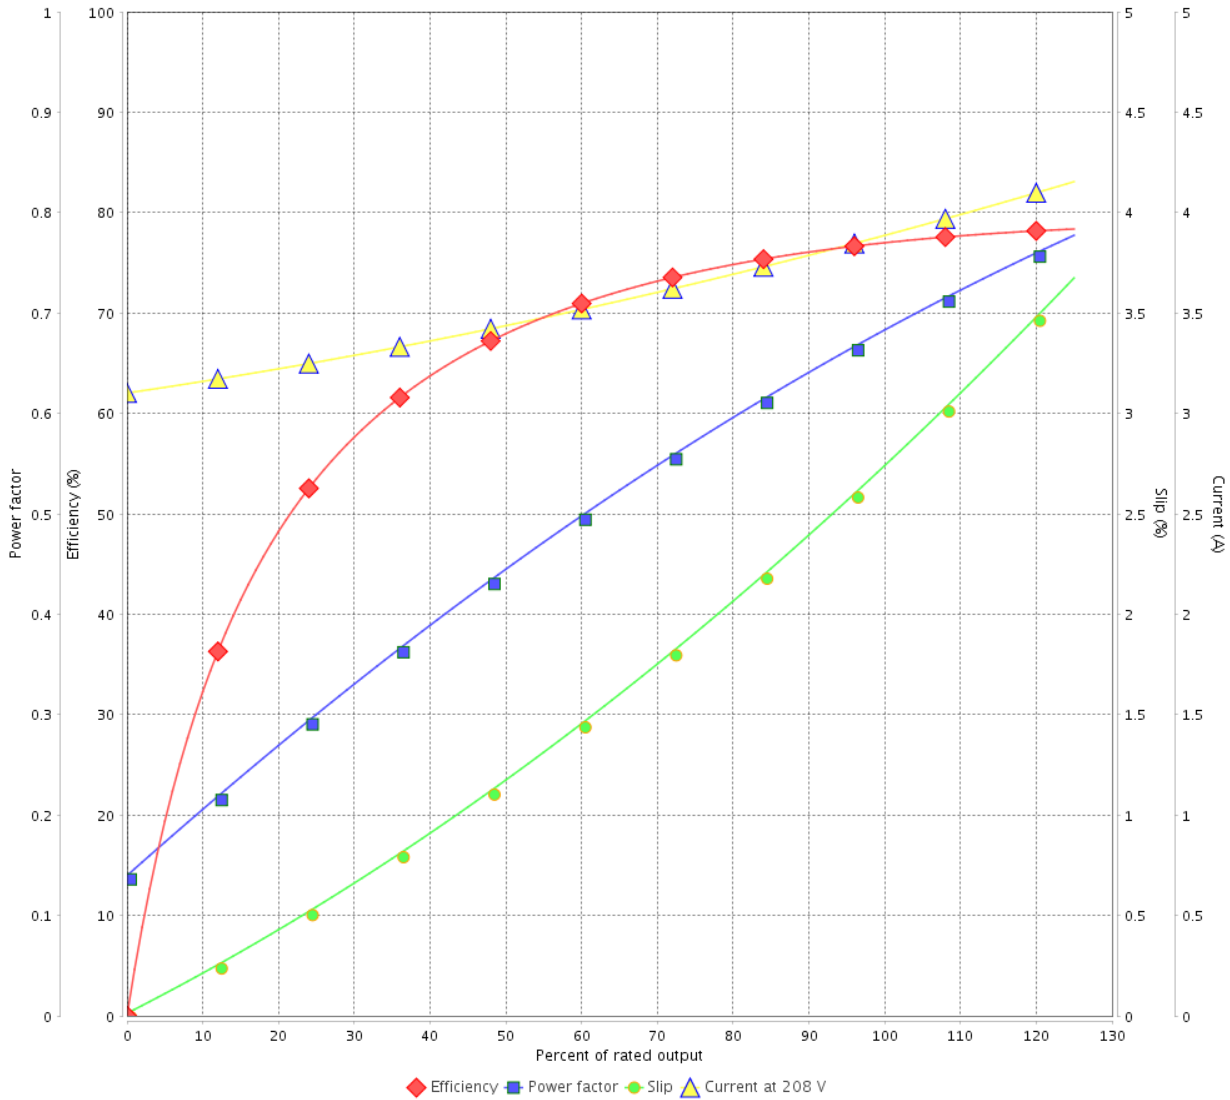

Performance : 208 V 60 Hz 4P

Rated current	: 3.98 A	Moment of inertia (J)	: 0.0030 kgm ²
LRC	: 6.6	Duty cycle	: Cont.(S1)
Rated torque	: 0.415 kgfm	Insulation class	: F
Locked rotor torque	: 250 %	Service factor	:
Breakdown torque	: 290 %	Temperature rise	: 80 K
Rated speed	: 1750 rpm	Design	: A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	11/05/2022			

1 2 3 4 5 6



A

B

C

D

E

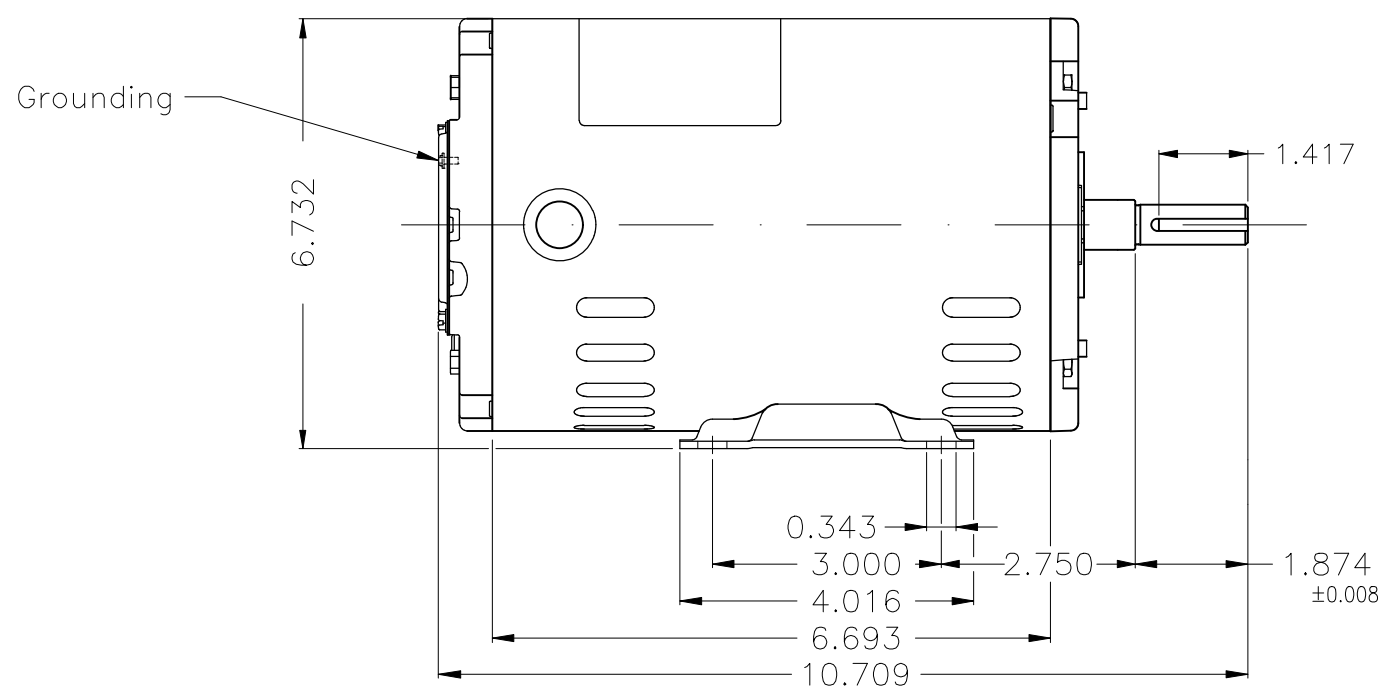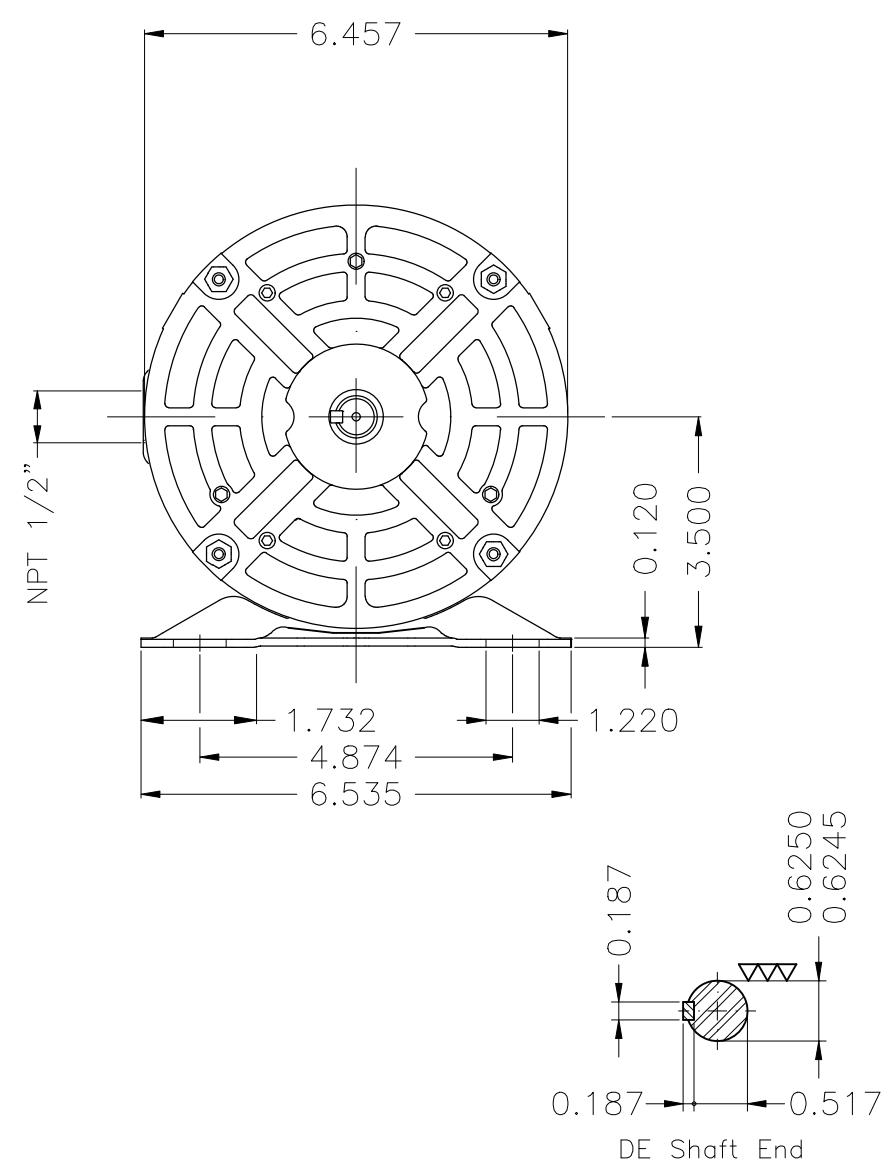

Color Munsell N 1 matte black										
Painting plan 207N										
Mounting F-1/B3R(D)										
					HYBRISUSER	00				
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER	
EXECUTED	HYBRISUSER	THREE PH. MOTOR ROLLED STEEL FRAME 56 IP21 ODP			PREVIEW					
CHECKED					WDD		00			
RELEASED					SHEET		1 / 1			
REL. DATE		WMO	Jaragua do Sul	Product Engineering						

1 HP 04 Poles 60 Hz

A



Dimensions in inches XME A3