

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC - Nema Premium Efficiency Product code : 17473357

Frame	: 182/4TC	Locked rotor time	: 12 s (hot) 22 s (cold)
Output	: 5 HP (3.7 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 575 V	Altitude	: 3280 ft
Rated current	: 5.19 A	Protection degree	: IP55
L. R. Amperes	: 36.3 A	Cooling method	: IC411 - TEFC
LRC	: 7.0	Mounting	: F-1/B14R(D)
No load current	: 2.75 A	Rotation ¹	: Both
Rated speed	: 1750 rpm	Noise level ²	: 56.0 dB(A)
Slip	: 2.78 %	Vibration class	: A
Rated torque	: 14.8 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 220 %	Approx. weight ³	: 71.4 lb
Pull up torque	: 185 %	Painting plan	: 207N
Breakdown torque	: 300 %	Color	: MUNSELL N 1 - MATTE
Insulation class	: F	Design	: B
Service factor	: 1.15		
Moment of inertia (J)	: 0.3085 sq.ft.lb		

Output	50%	75%	100%	Load type	: -
Efficiency (%)	88.5	89.5	89.5	Load torque	: -
Power Factor	0.60	0.73	0.80	Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end	Foundation loads	
Bearing type #1	6206-ZZ	6205-ZZ	Max. traction	:
Bearing type #2	-	-	Max. compression	:
Lubrication interval	-	-		
Lubricant amount #1	-	-		
Lubricant amount #2	-	-		
Lubricant type	MOBIL POLYREX EM			

Notes
See notes on page 2.

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
14.1	13.2	12.9	6.6	5.1	3.6	2.8

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Rev.	Checked	Date
Performed by	farazq	1859509362		
Checked by	AUTOMATICO	Page	Rev.	
Date	11/06/2026	1 / 2	0	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC - Nema Premium Efficiency Product code : 17473357

Thermal protection ID	Application	Type	Quantity	Sensing Temperature
-----------------------	-------------	------	----------	---------------------


Notes

Standards	Specification : MG1 - Part 10	Vibration : MG1 - Part 7
	Test : MG1 - Part 12	Tolerance : MG1 - Part 12
	Noise : MG1 - Part 9	


This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Rev.	Checked	Date
Performed by	farazq	1859509362		
Checked by	AUTOMATICO	Page	Rev.	
Date	11/06/2026	2 / 2	0	

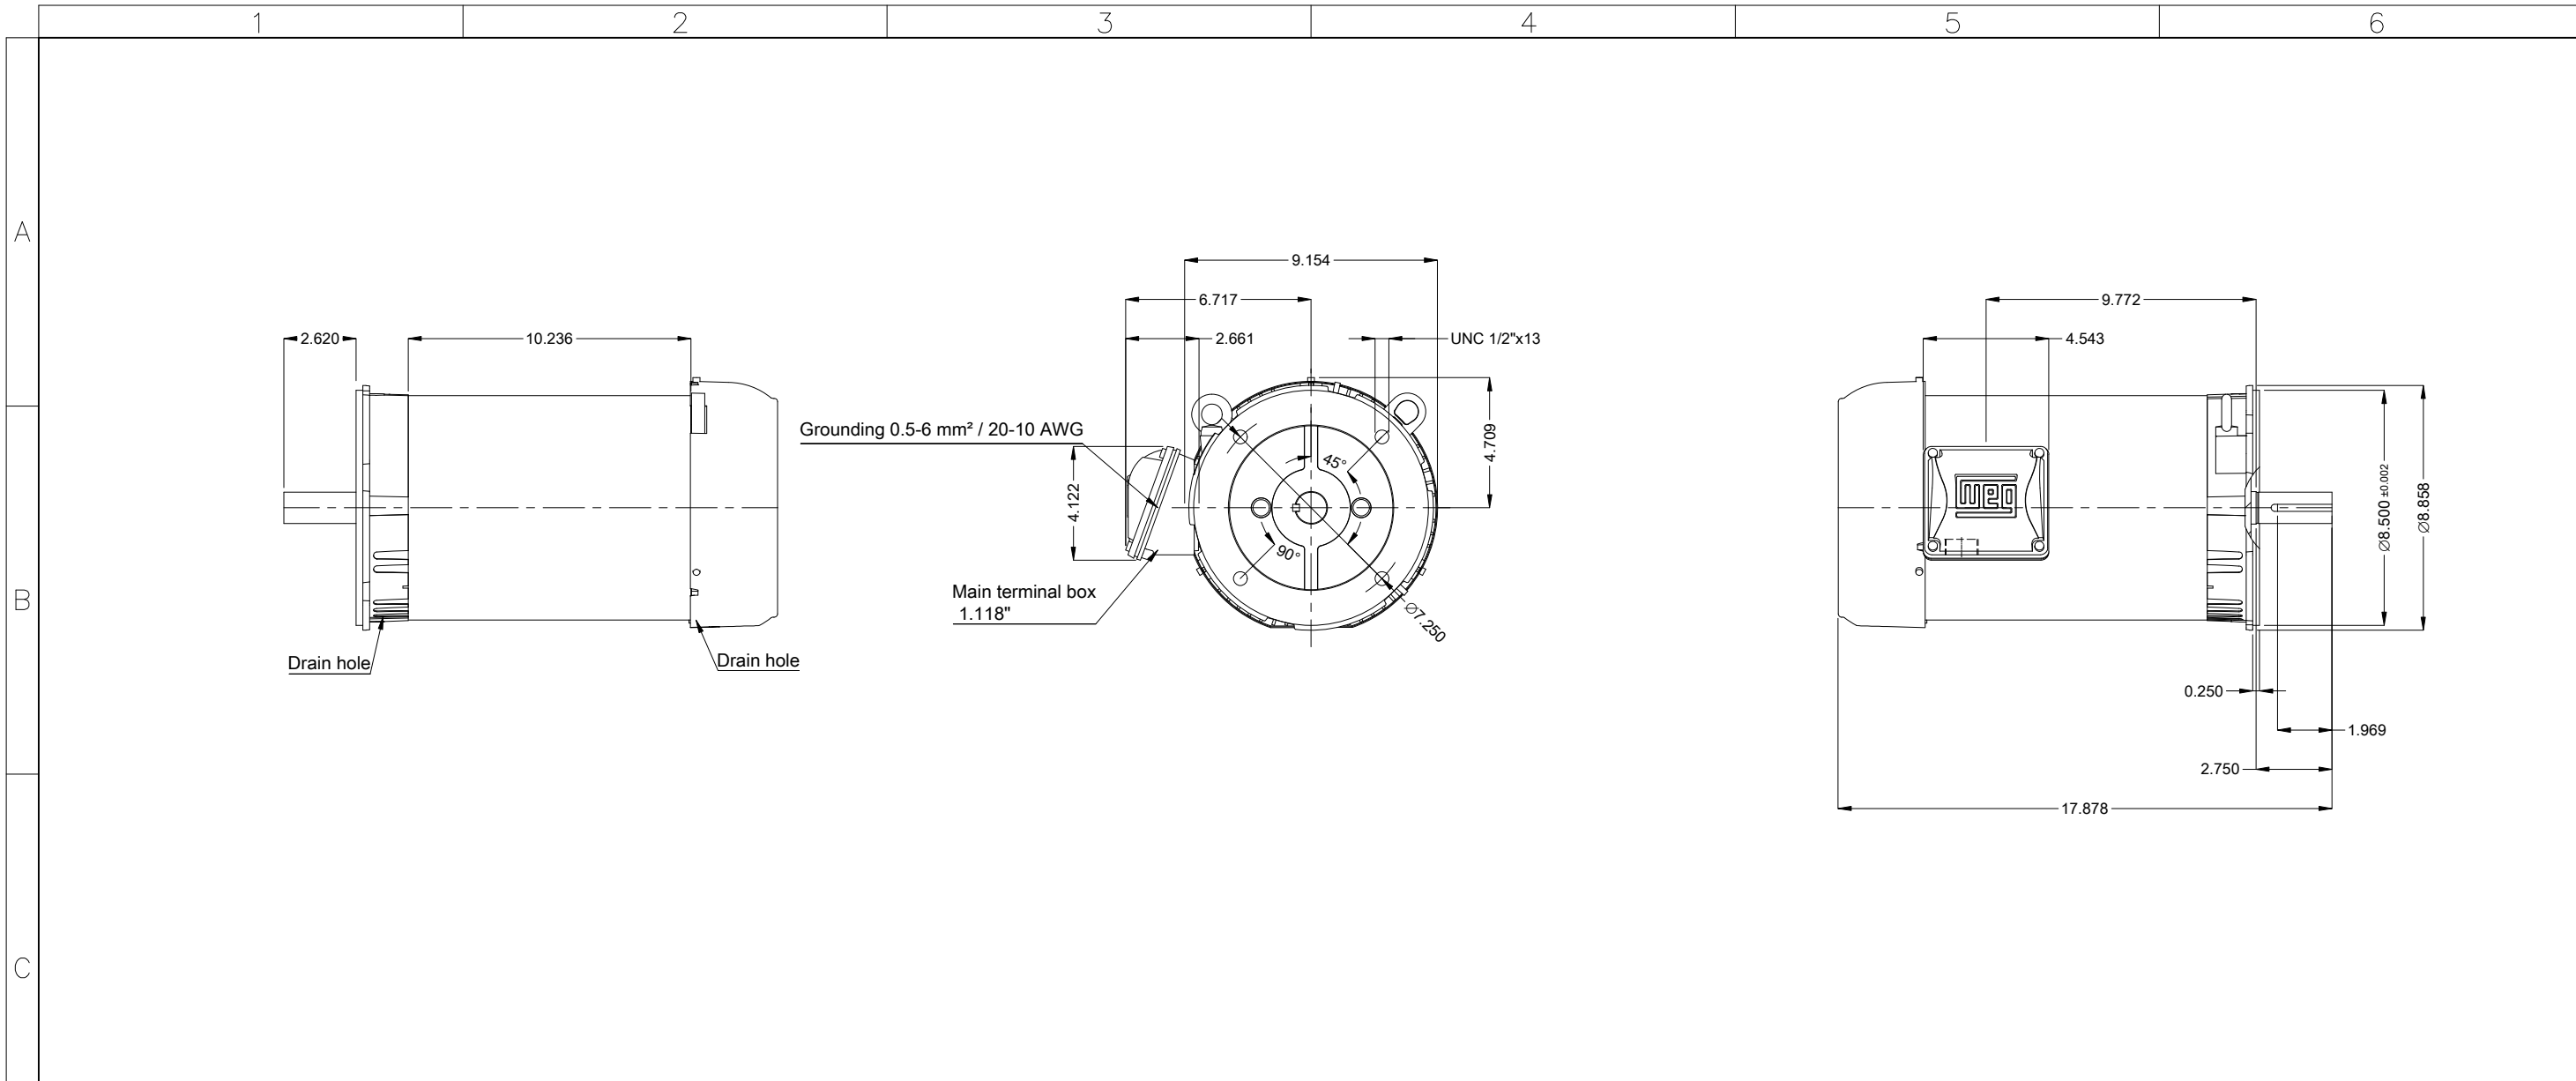

Color Munsell N 1 matte black
Painting plan 207N
Mounting MARKET F-1/B14R(D)
Mounting F-1/B14R(D)

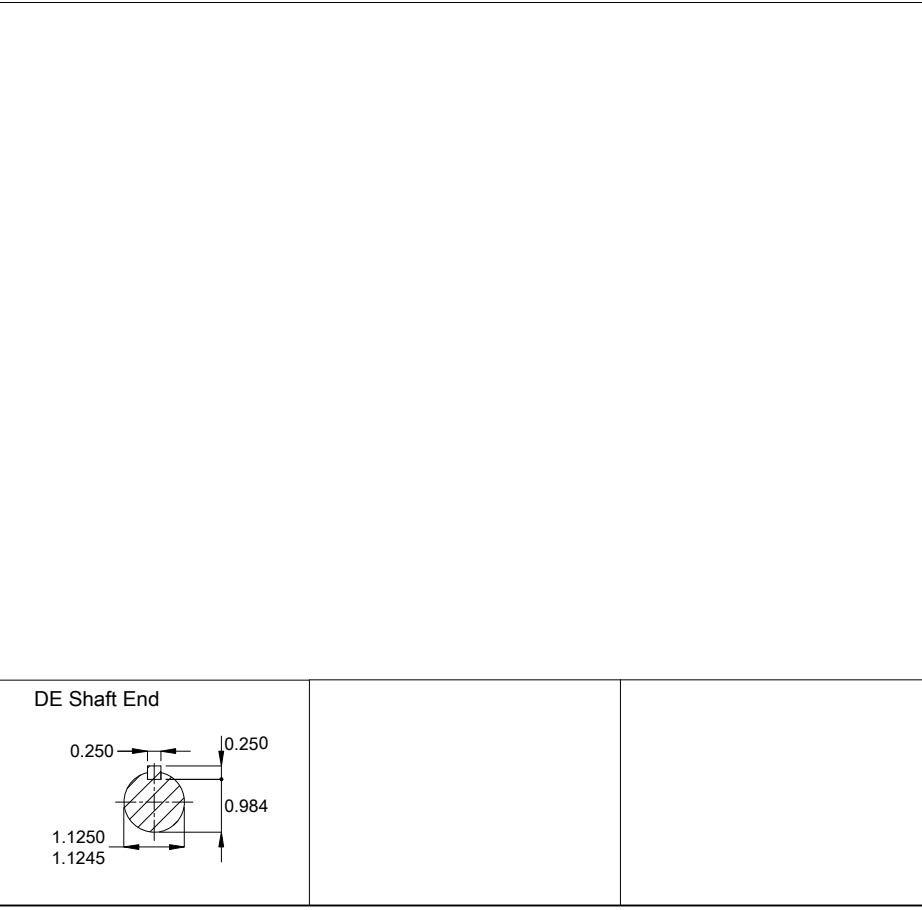

5 HP 04 Poles 60 Hz										A
Scale 1 : 6										
HYBRISUSER										00
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR ROLLED STEEL NEMA PREM. EFF.				PREVIEW				
CHECKED		FRAME 182/4TC IP55 TEFC				WDD	00			
RELEASED						SHEET		1 / 1		
REL. DATE										