

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 14009536

Frame	: 182/4TC	Locked rotor time	: 27s (cold) 15s (hot)
Output	: 5 HP (3.7 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 5.19 A	Protection degree	: IP55
L. R. Amperes	: 38.9 A	Cooling method	: IC411 - TEFC
LRC	: 7.5x(Code J)	Mounting	: F-1
No load current	: 2.32 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1750 rpm	Noise level ²	: 56.0 dB(A)
Slip	: 2.78 %	Starting method	: Direct On Line
Rated torque	: 2.07 kgfm	Approx. weight ³	: 54.7 kg
Locked rotor torque	: 229 %		
Breakdown torque	: 290 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0169 kgm ²		
Design	: B		

Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	88.5	89.5	89.5	Max. traction	: 98 kgf
Power Factor	0.00	0.62	0.74	0.80	Max. compression	: 153 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
11.2	9.4	8.7	5.3	3.7	2.4	1.7

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6207 ZZ	6206 ZZ
Sealing	:	V'Ring	Lip Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	27/10/2024			1 / 3	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Brake information

Voltage: 525-575 V
Brake Torque: 6.12 kgfm

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	27/10/2024		2 / 3	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :


Product line : W22 Brake Motor NEMA Premium Product code : 14009536
Efficiency Three-Phase

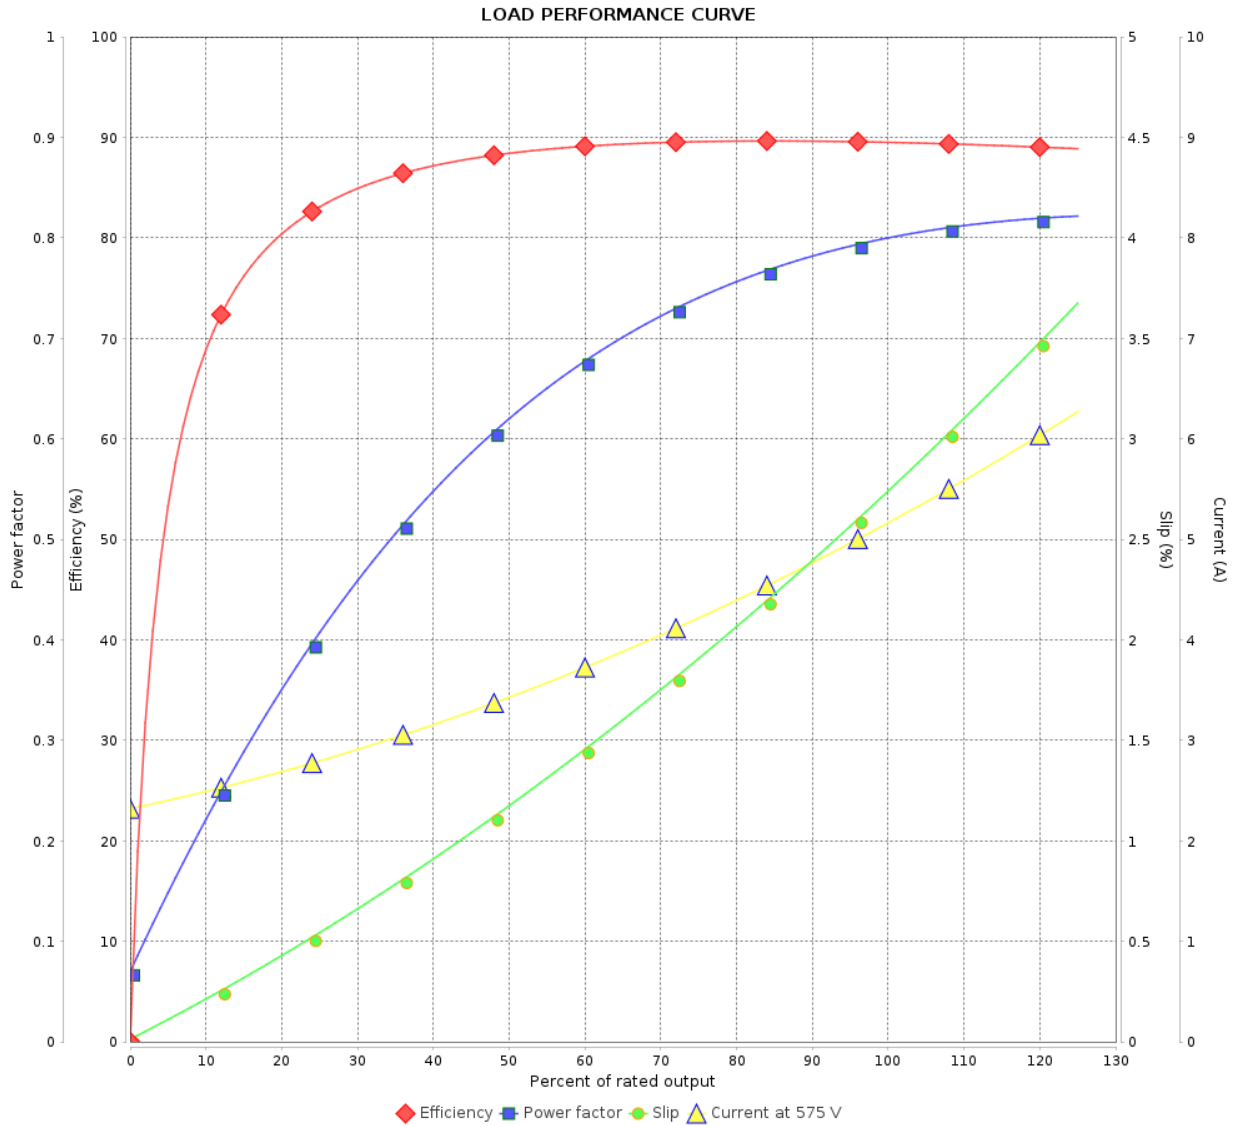


Performance : 575 V 60 Hz 4P

Rated current	: 5.19 A	Moment of inertia (J)	: 0.0169 kgm ²
LRC	: 7.5	Duty cycle	: Cont.(S1)
Rated torque	: 2.07 kgfm	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	: 1.25
Breakdown torque	: 290 %	Temperature rise	: 80 K
Rated speed	: 1750 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 3	Revision
Checked by				
Date	27/10/2024			

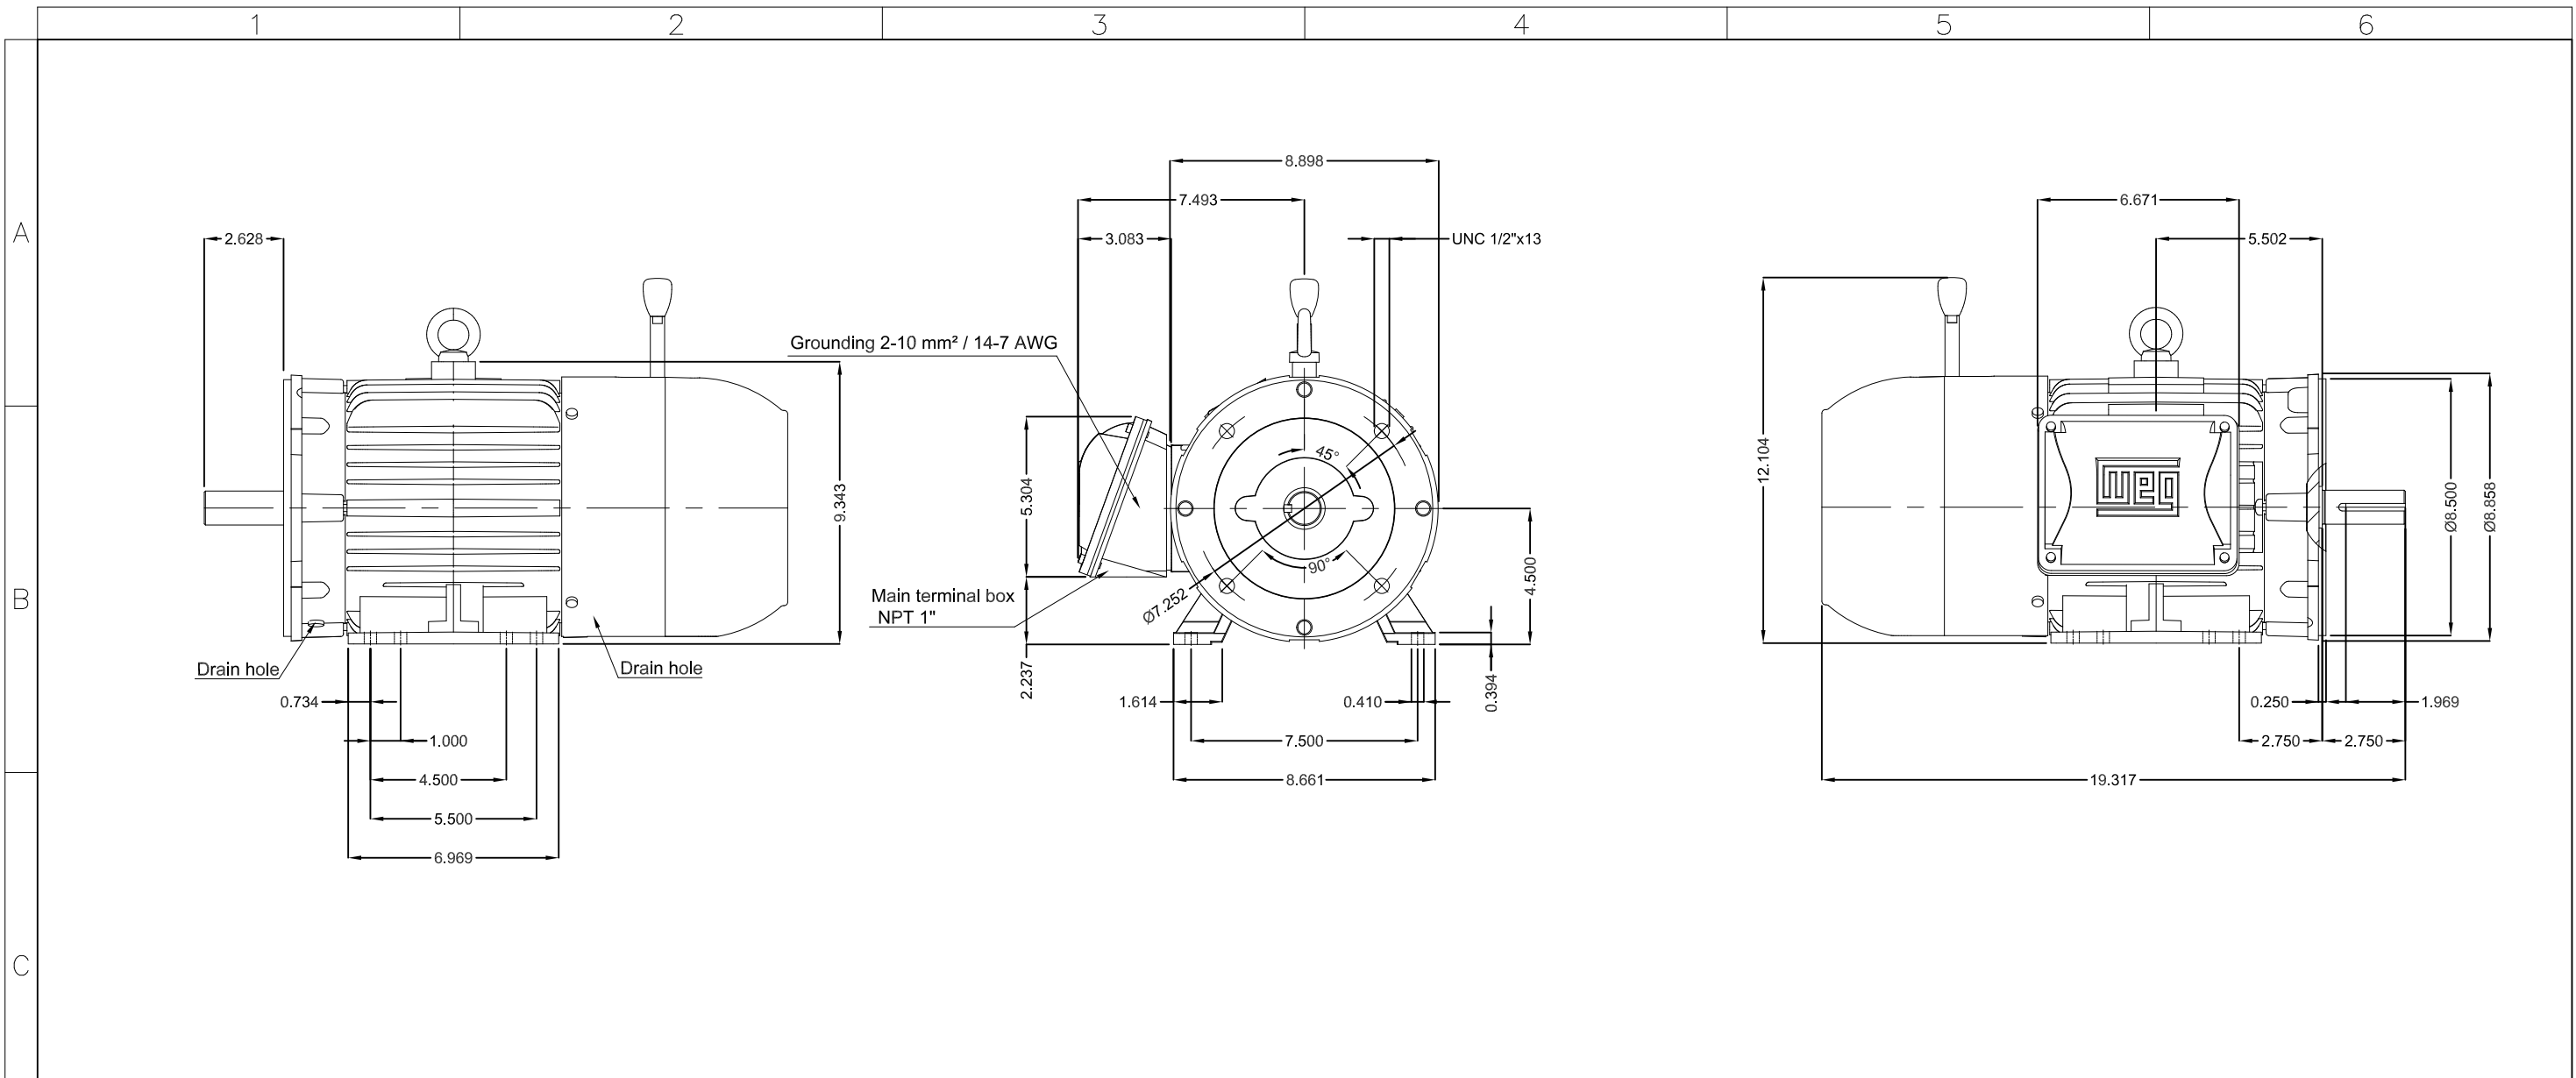

<p>Brake voltage 525-575 V</p> <p>With brake 14 (60 Nm)</p> <p>Color RAL 5009</p> <p>Painting plan 207A</p> <p>Mounting NEMA F-1</p> <p>Mounting B34R(D)</p>
--

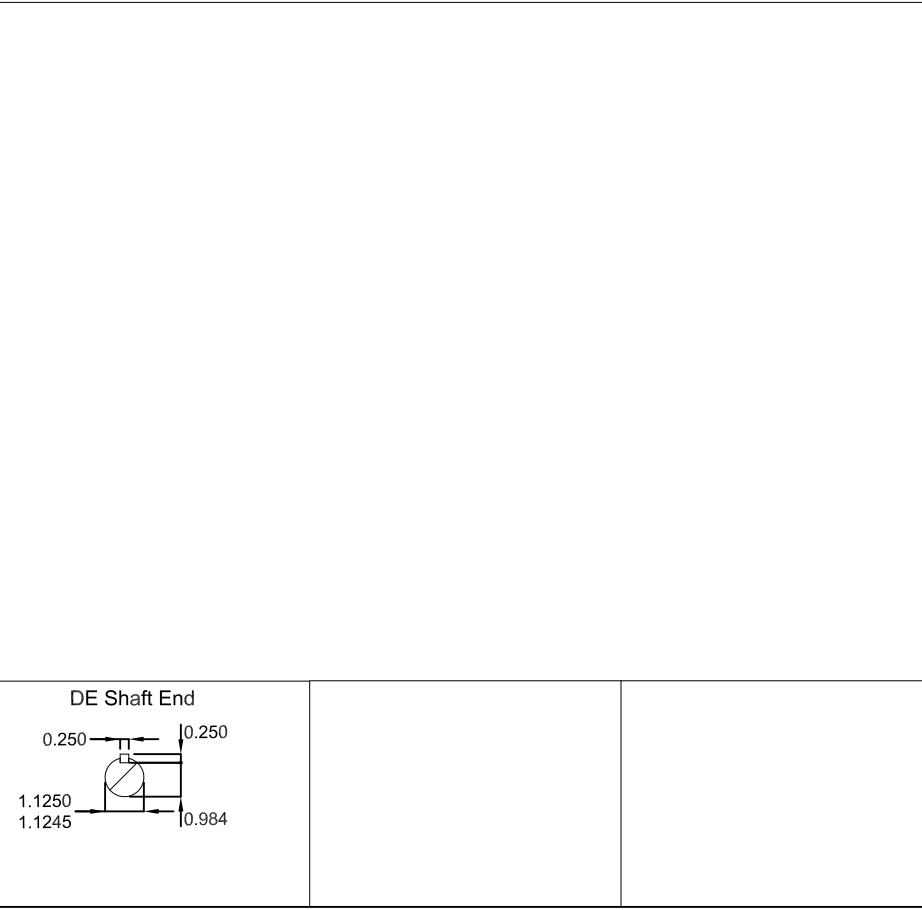

5 HP 04 Poles 60 Hz										A	
ECM	LOC	SUMMARY OF MODIFICATIONS				HYBRISUSER	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR W22 BRAKE MOTOR NEMA PREM. EFF.				EXECUTED					00
CHECKED		FRAME 182/4TC IP55 TEFC				EXECUTED					00
RELEASED						EXECUTED					
REL. DATE						EXECUTED					
						PREVIEW		WDD / 00		SHEET /	
						WEG					