DATA SHEET

Single Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: Single-Phase	Product code :	13508282

Frame	: 56	Cooling method	: IC01 - ODP
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation[1]	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight[3]	: 15.0 kg
Design	: N	Moment of inertia (J)	: 0.0023 kgm²

Output [HP]		1
Poles		2
Frequency [Hz]		60
Rated voltage [V]		115/208-230
Rated current [A]		8.60/4.75-4.30
L. R. Amperes [A]		72.2/39.9-36.1
LRC [A]		8.4x(Code K)
No load current [A]		2.60/1.12-1.30
Rated speed [RPM]		3510
Slip [%]		2.50
Rated torque [kgfm]		0.207
Locked rotor torque [%]		290
Breakdown torque [%]		300
Service factor		
Temperature rise		80 K
Locked rotor time		28s (cold) 16s (hot)
Noise level[2]		58.0 dB(A)
Efficiency (%)	25%	
	50%	69.0
	75%	76.0
	100%	80.4
Power Factor	25%	
	50%	0.89
	75%	0.93
	100%	0.94

		Drive end	Non drive end
Bearing type	:	6204 ZZ	6202 ZZ
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Foundation loads

Max. traction : 12 kgf

Max. compression : 27 kgf

Notes

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date


Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: Single-Phase	Product code :	13508282

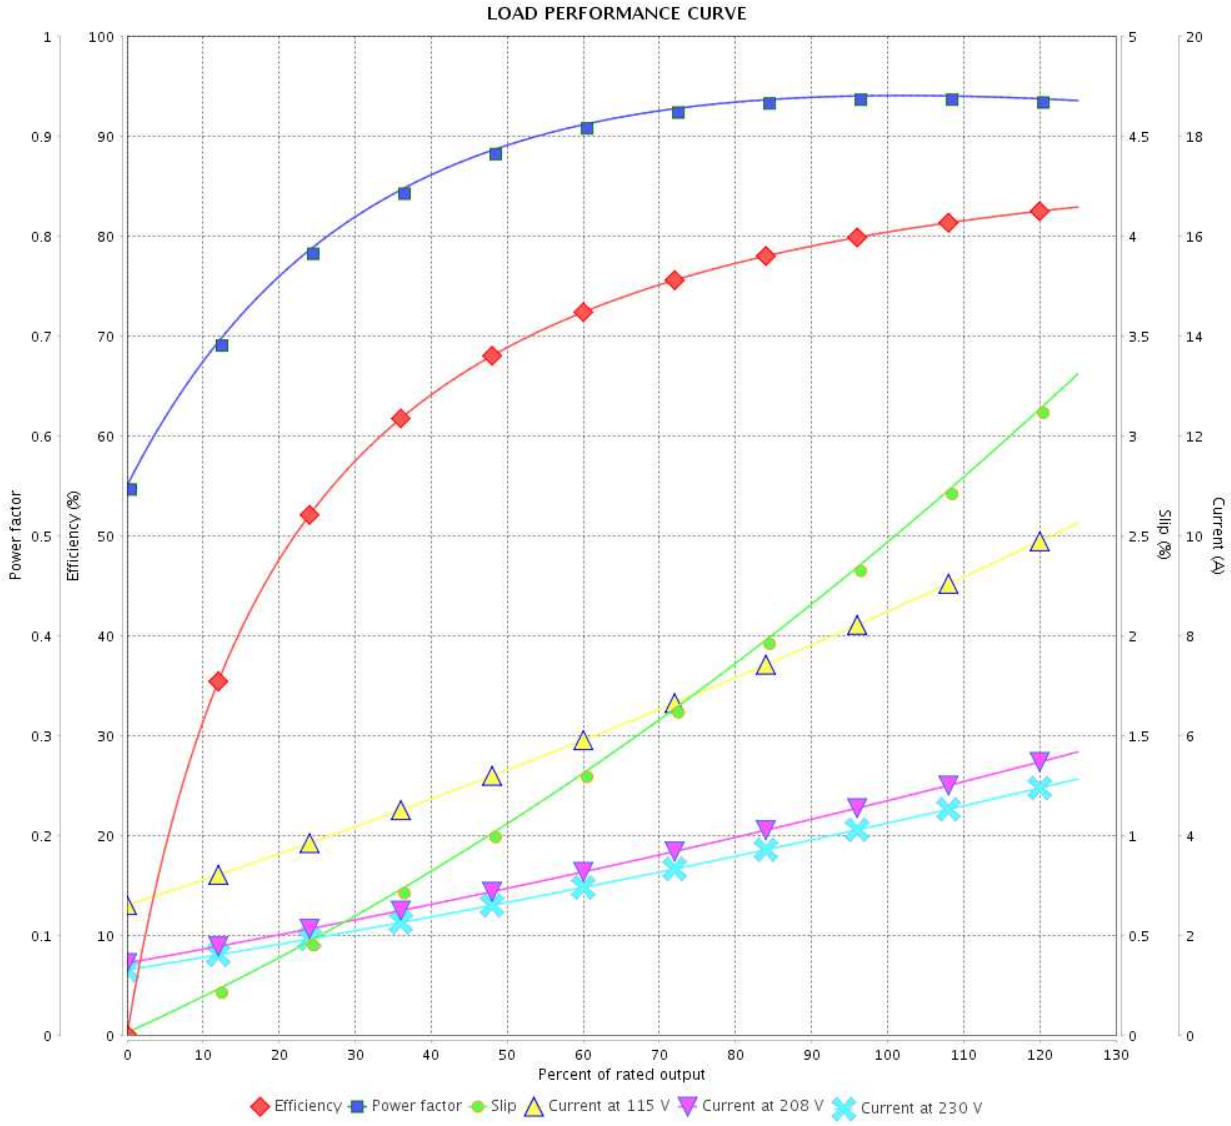


Performance	: 115/208-230 V 60 Hz 2P		
Rated current	: 8.60/4.75-4.30 A	Moment of inertia (J)	: 0.0023 kgm²
LRC	: 8.4	Duty cycle	: Cont.(S1)
Rated torque	: 0.207 kgfm	Insulation class	: F
Locked rotor torque	: 290 %	Service factor	:
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 3510 rpm	Design	: N


Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	17/05/2022		2 / 2	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

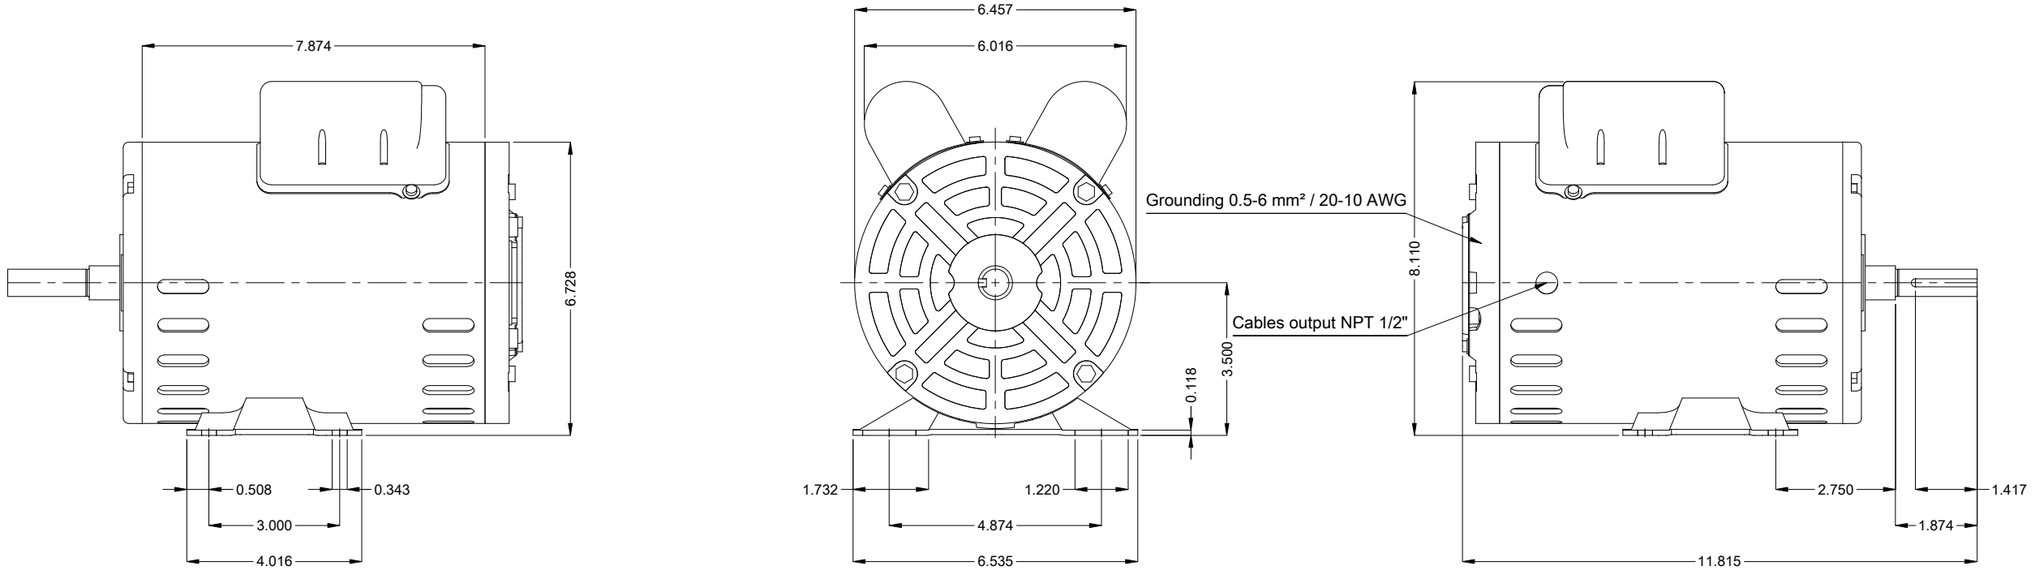

DE Shaft End



Reinforce the foot with 2 mig welding spots

Mounting MARKET F-1/B3R(D)

Mounting F-1/B3R(D)

1 HP 02 Poles 60 Hz

A

Scale 2 : 7

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER
CHECKED	
RELEASED	
REL. DATE	

SINGLE PH. MOTOR ROLLED STEEL PREM. EFF.

FRAME 56 IP21 ODP

PREVIEW

WDD 00

SHEET 1 / 1

Dimensions in inches

A3

WEG's property. Forbidden reproduction without previous authorization.