

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: Jet Pump - J type Single-Phase	Product code :	14477578
Frame	: W56J	Cooling method	: IC01 - ODP	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: CCW	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 9.7 kg	
Design	: N	Moment of inertia (J)	: 0.0011 kgm ²	
Output [HP]	0.33			
Poles	2			
Frequency [Hz]	60			
Rated voltage [V]	115/208-230			
Rated current [A]	3.20/1.77-1.60			
L. R. Amperes [A]	28.2/15.6-14.1			
LRC [A]	8.8x(Code L)			
No load current [A]	1.00/0.431-0.500			
Rated speed [RPM]	3510			
Slip [%]	2.50			
Rated torque [kgfm]	0.068			
Locked rotor torque [%]	280			
Breakdown torque [%]	300			
Service factor				
Temperature rise	80 K			
Locked rotor time	27s (cold) 15s (hot)			
Noise level ²	56.0 dB(A)			
Efficiency (%)	25%			
	50%	56.0		
	75%	64.0		
	100%	70.5		
Power Factor	25%			
	50%	0.97		
	75%	0.97		
	100%	0.97		
Bearing type	: <u>Drive end</u> 6203 2RS <u>Non drive end</u> 6202 2RS	Foundation loads		
Sealing	: Without Bearing Seal Without Bearing Seal	Max. traction	: 1 kgf	
		Max. compression	: 11 kgf	
Lubrication interval	: -			
Lubricant amount	: -			
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	17/05/2022		Page 1 / 2	Revision

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - J type Single-Phase

Product code : 14477578

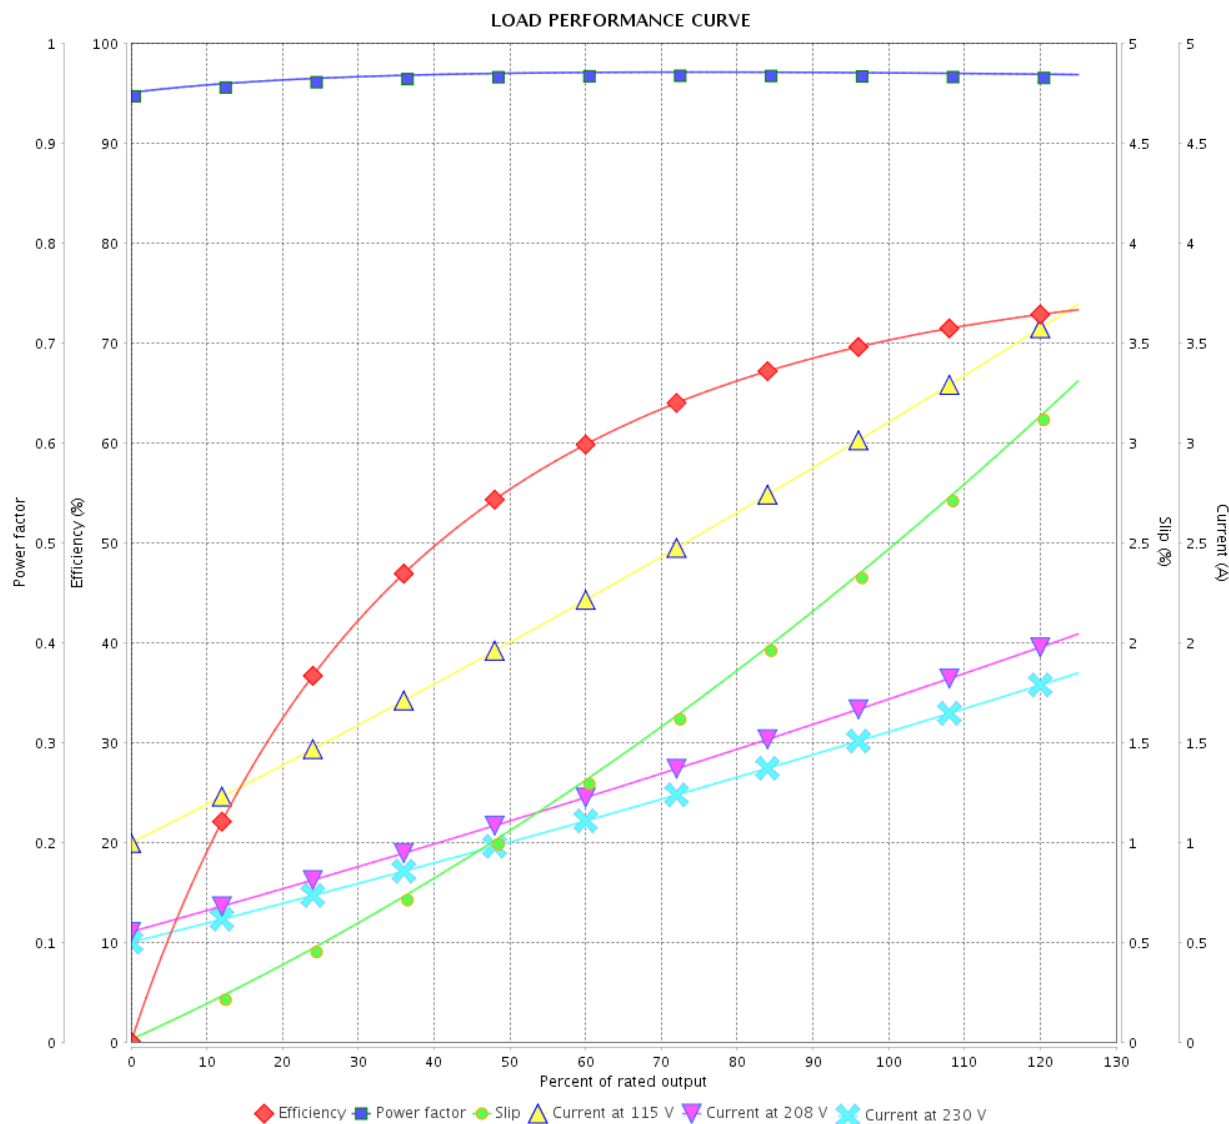




Performance : 115/208-230 V 60 Hz 2P

Rated current : 3.20/1.77-1.60 A
 LRC : 8.8
 Rated torque : 0.068 kgfm
 Locked rotor torque : 280 %
 Breakdown torque : 300 %
 Rated speed : 3510 rpm

Moment of inertia (J) : 0.0011 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

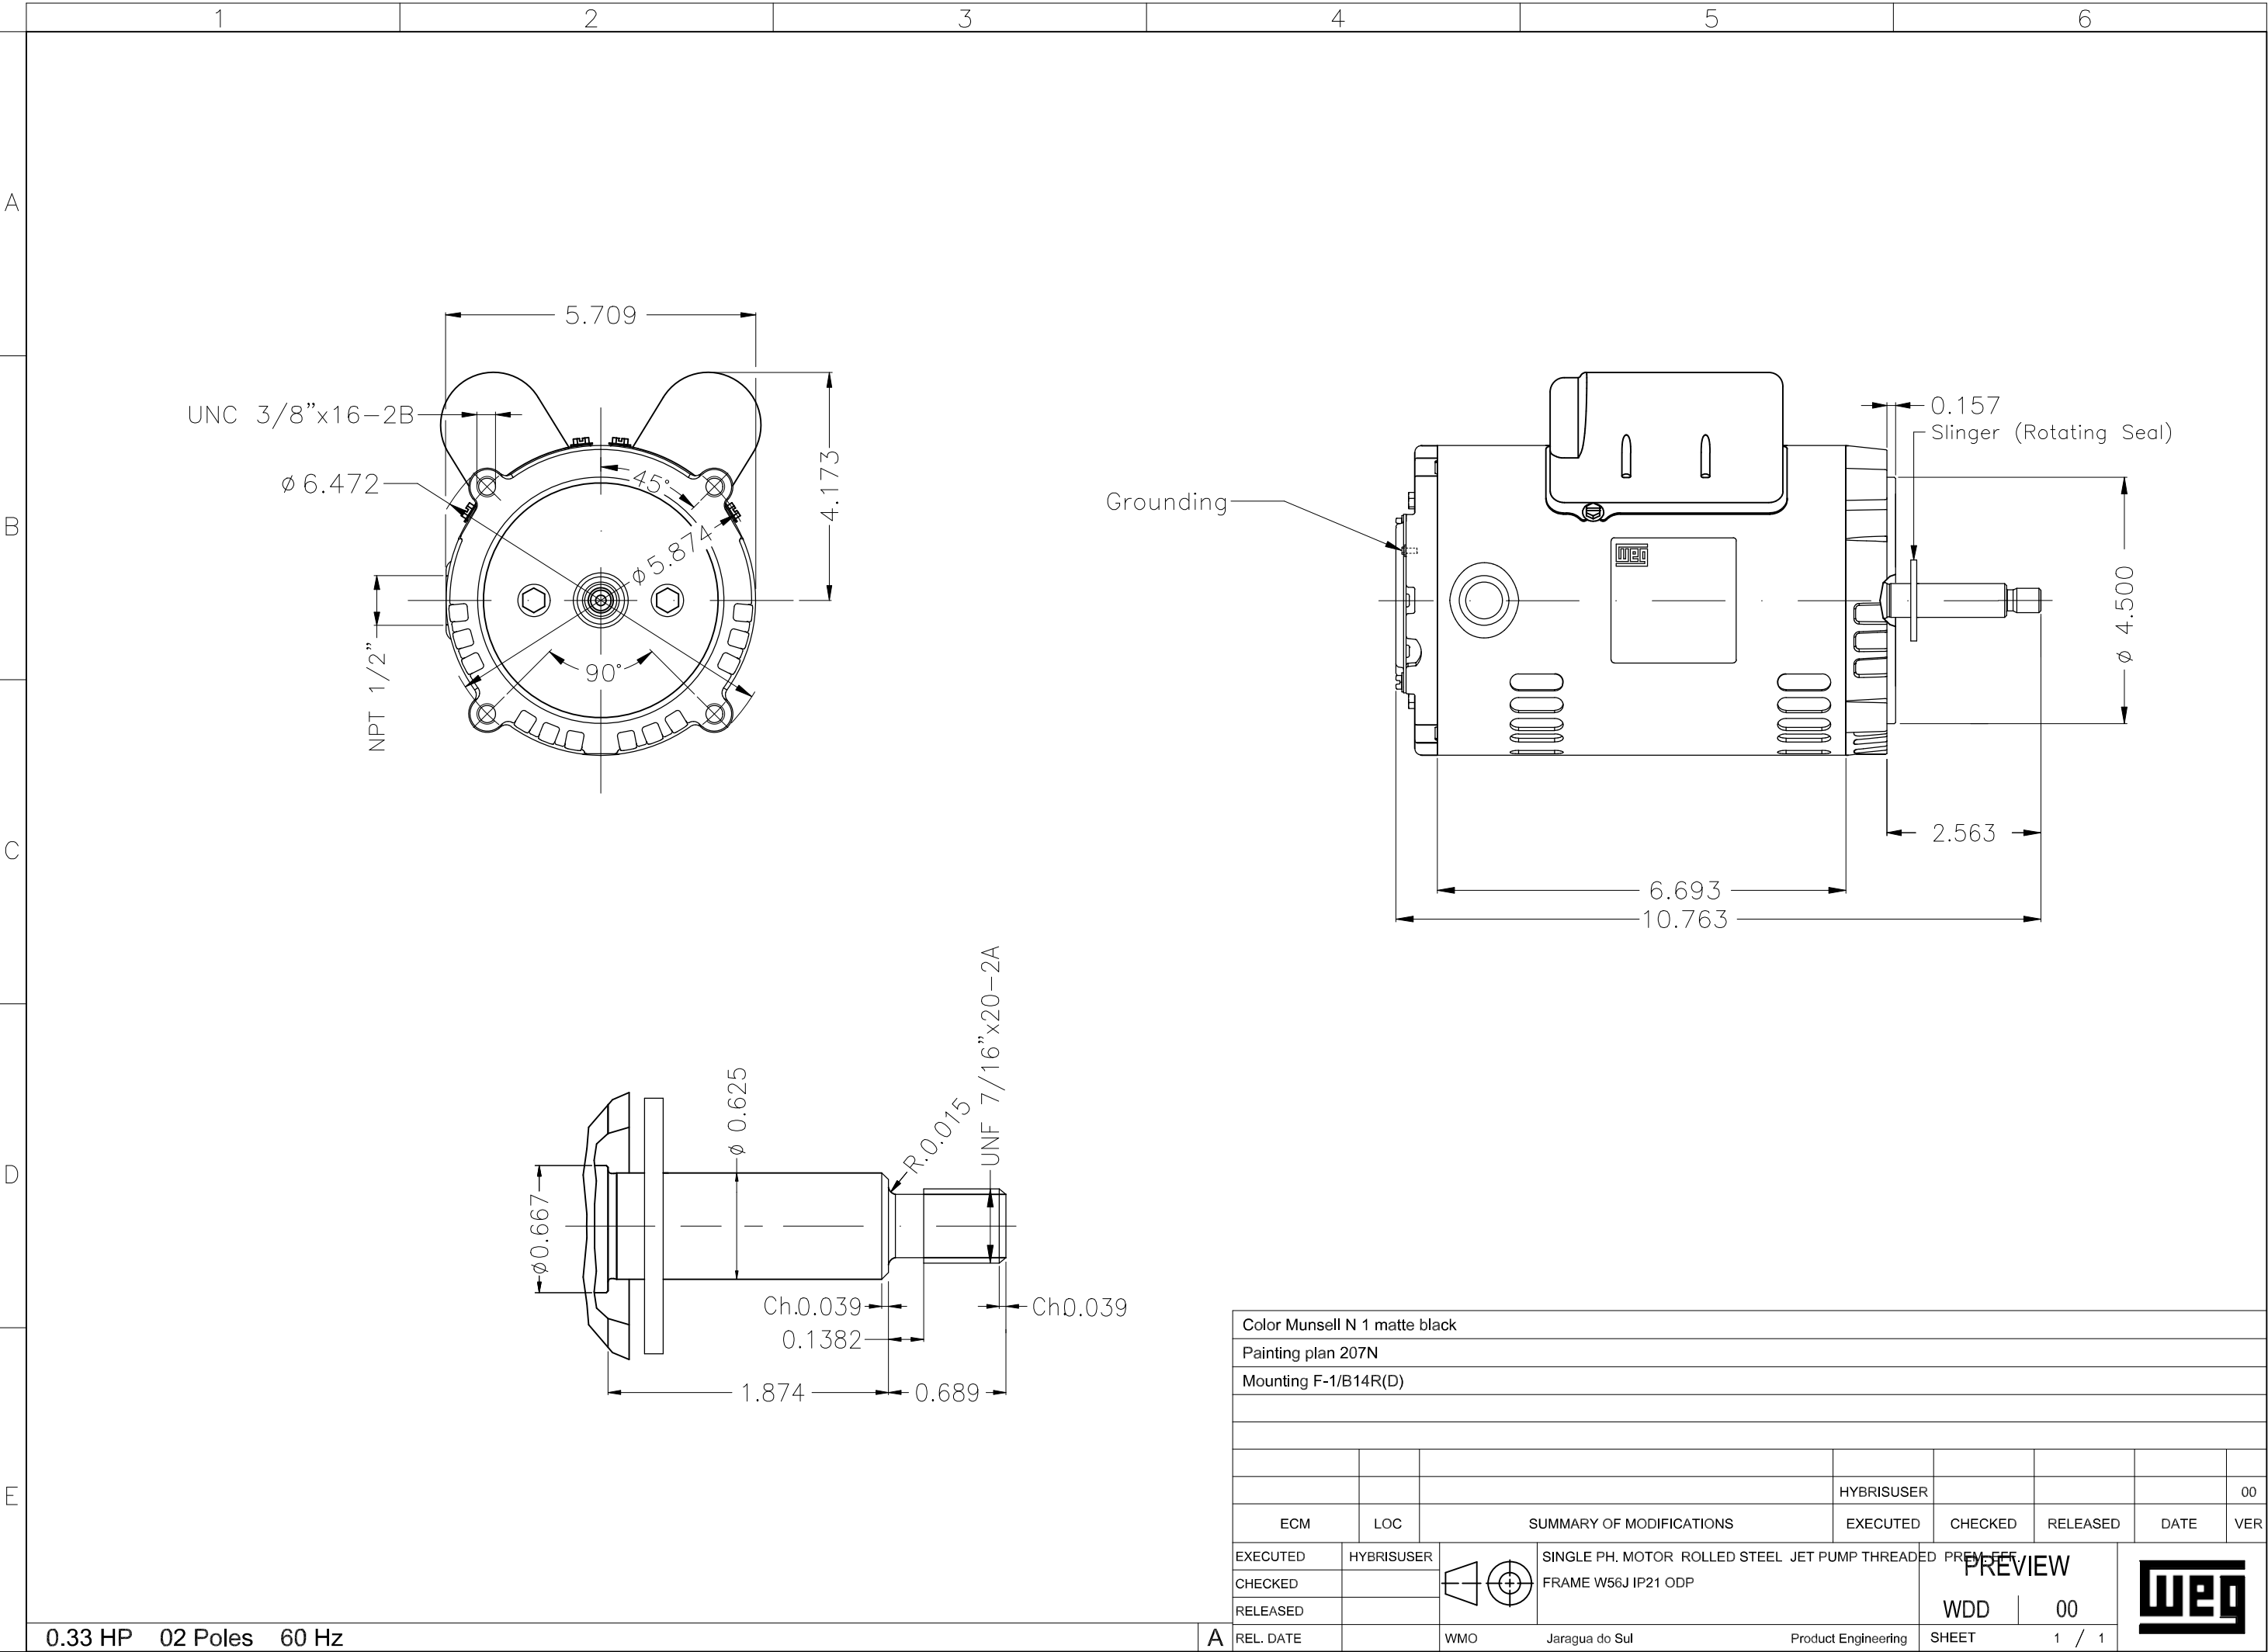

Color Munsell N 1 matte black									
Painting plan 207N									
Mounting F-1/B14R(D)									
				HYBRISUSER					00
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		SINGLE PH. MOTOR ROLLED STEEL JET PUMP THREADED PRELIMINARY			PREVIEW			
CHECKED			FRAME W56J IP21 ODP						
RELEASED									
REL. DATE			WMO Jaragua do Sul Product Engineering			SHEET	1 / 1		