

DATA SHEET



Single Phase Induction Motor - Squirrel Cage

Customer :

Product line : General Single-Phase

Product code : 10579406

Frame : B56
 Output : 0.33 HP (0.25 kW)
 Poles : 2
 Frequency : 60 Hz
 Rated voltage : 115/208-230 V
 Rated current : 5.70/2.70-2.85 A
 L. R. Amperes : 33.1/15.7-16.5 A
 LRC : 5.8x(Code N)
 No load current : 4.40/1.90-2.20 A
 Rated speed : 3490 rpm
 Slip : 3.06 %
 Rated torque : 0.069 kgfm
 Locked rotor torque : 370 %
 Breakdown torque : 320 %
 Insulation class : B
 Service factor : 1.15
 Moment of inertia (J) : 0.0012 kgm²

Locked rotor time : 10s (cold) 6s (hot)
 Temperature rise : 80 K
 Duty cycle : Cont.(S1)
 Ambient temperature : -20°C to +40°C
 Altitude : 1000 m.a.s.l.
 Protection degree : IP55
 Cooling method : IC411 - TEFC
 Mounting : F-1
 Rotation¹ : Both (CW and CCW)
 Noise level² : 55.0 dB(A)
 Starting method : Direct On Line
 Approx. weight³ : 9.7 kg

Output	25%	50%	75%	100%
Efficiency (%)	37.3	40.0	49.0	53.0
Power Factor	0.32	0.56	0.64	0.70

Foundation loads
 Max. traction : 2 kgf
 Max. compression : 11 kgf

	Drive end	Non drive end
Bearing type	6203 ZZ	6202 ZZ
Sealing	V'Ring	V'Ring
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	14/01/2024			

LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : General Single-Phase

Product code : 10579406

LOAD PERFORMANCE CURVE

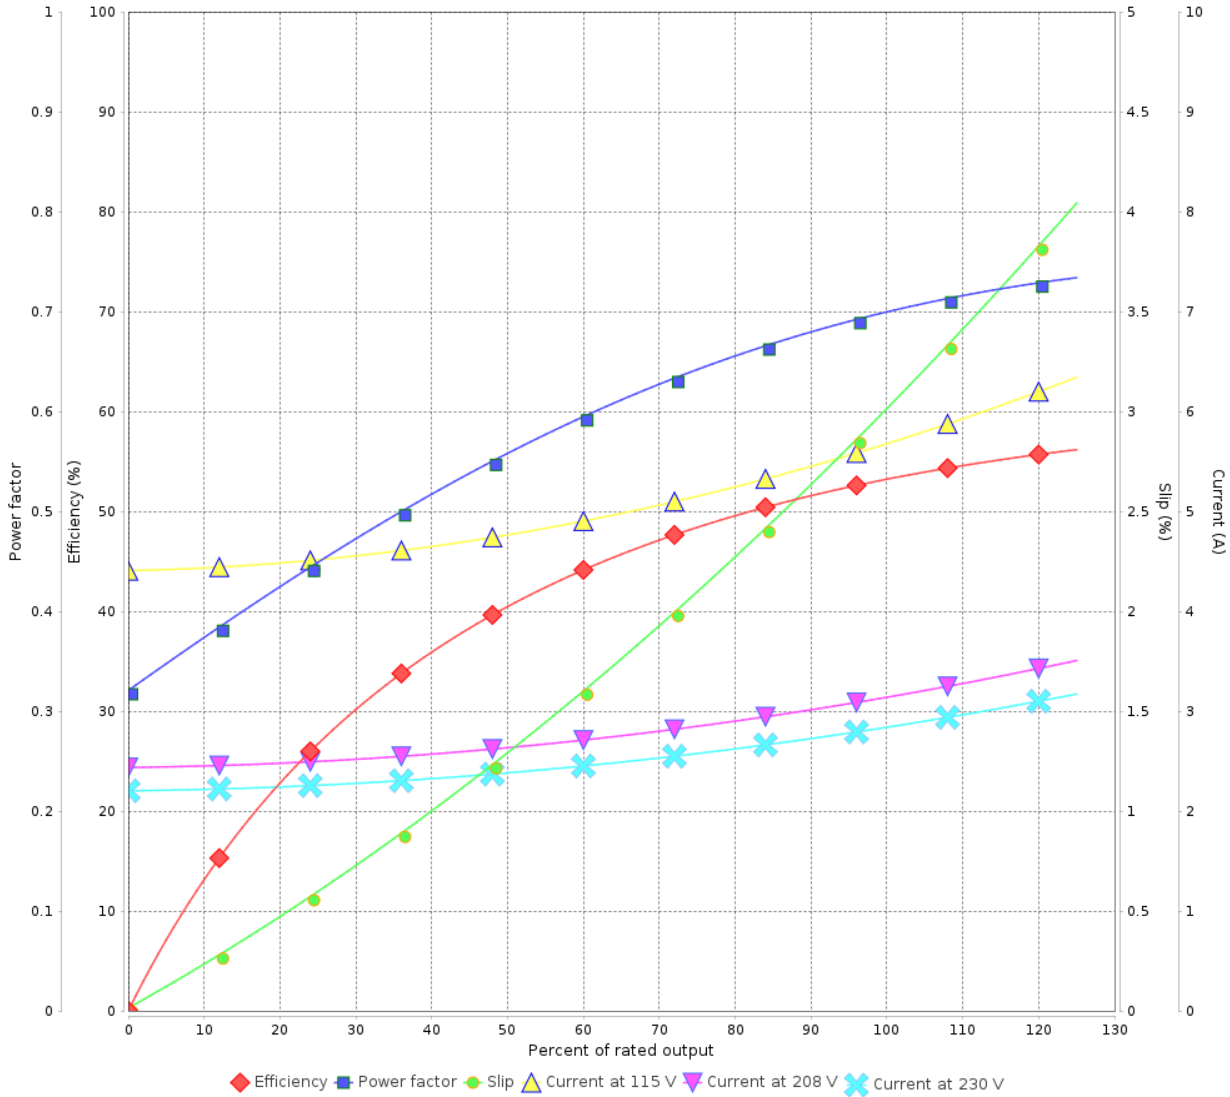

Performance : 115/208-230 V 60 Hz 2P

Rated current : 5.70/2.70-2.85 A
 LRC : 5.8
 Rated torque : 0.069 kgfm
 Locked rotor torque : 370 %
 Breakdown torque : 320 %
 Rated speed : 3490 rpm

Moment of inertia (J) : 0.0012 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : B
 Service factor :
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				