

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : ODP High Efficiency Three-Phase Product code : 11996557

Frame	: 254TC	Locked rotor time	: 30s (cold) 17s (hot)
Output	: 15 HP (11 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 15.0 A	Protection degree	: IP23
L. R. Amperes	: 89.8 A	Cooling method	: IC01 - ODP
LRC	: 6.0x(Code G)	Mounting	: F-1
No load current	: 7.20 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1765 rpm	Noise level ²	: 59.0 dB(A)
Slip	: 1.94 %	Starting method	: Direct On Line
Rated torque	: 6.17 kgfm	Approx. weight ³	: 95.8 kg
Locked rotor torque	: 229 %		
Breakdown torque	: 250 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0652 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	89.5	91.0	91.0	Max. traction	: 194 kgf
Power Factor	0.63	0.75	0.81	Max. compression	: 290 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6309 Z C3	6209 Z C3
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	20000 h	20000 h
Lubricant amount	:	13 g	9 g
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	22/11/2024			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP High Efficiency Three-Phase Product code : 11996557

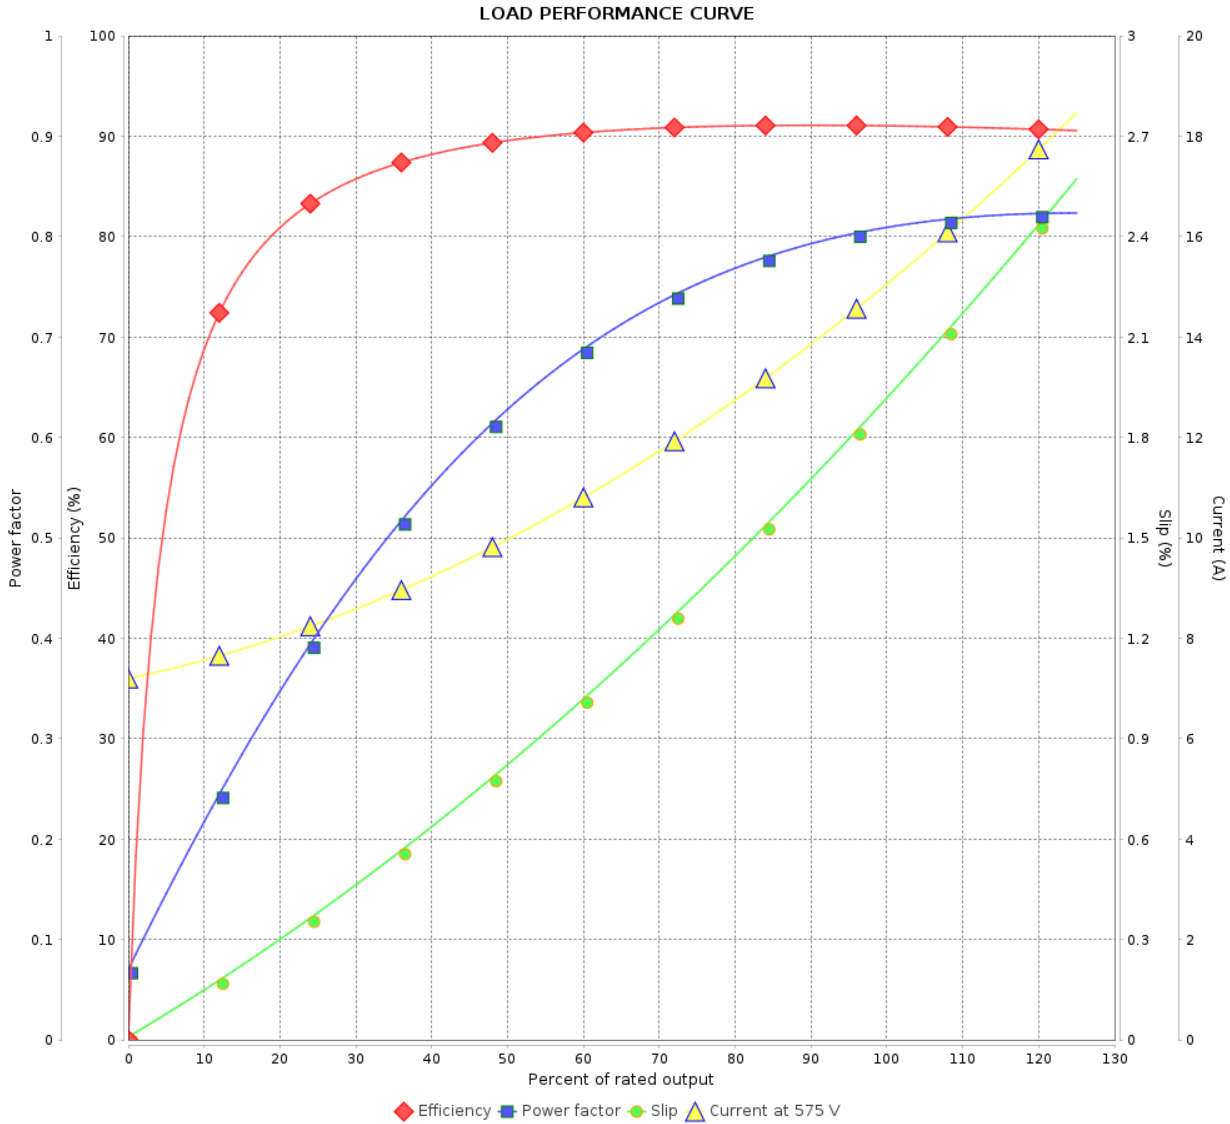

Performance : 575 V 60 Hz 4P

Rated current : 15.0 A
 LRC : 6.0
 Rated torque : 6.17 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 250 %
 Rated speed : 1765 rpm

Moment of inertia (J) : 0.0652 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	22/11/2024			