

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line : W22 Close Coupled Pump JM NEMA Premium Efficiency Three-Phase			Product code : 12712152			
Frame	: 284/6JM			Locked rotor time	: 30s (cold) 17s (hot)	
Output	: 25 HP (18.5 kW)			Temperature rise	: 80 K	
Poles	: 2			Duty cycle	: Cont.(S1)	
Frequency	: 60 Hz			Ambient temperature	: -20°C to +40°C	
Rated voltage	: 575 V			Altitude	: 1000 m.a.s.l.	
Rated current	: 23.0 A			Protection degree	: IP55	
L. R. Amperes	: 145 A			Cooling method	: IC411 - TEFC	
LRC	: 6.3x(Code G)			Mounting	: F-1	
No load current	: 6.52 A			Rotation ¹	: Both (CW and CCW)	
Rated speed	: 3545 rpm			Noise level ²	: 72.0 dB(A)	
Slip	: 1.53 %			Starting method	: Direct On Line	
Rated torque	: 5.12 kgfm			Approx. weight ³	: 176 kg	
Locked rotor torque	: 200 %					
Breakdown torque	: 250 %					
Insulation class	: F					
Service factor	: 1.25					
Moment of inertia (J)	: 0.1135 kgm ²					
Design	: B					
Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	90.8	91.0	91.7	91.7	Max. traction	: 95 kgf
Power Factor	0.54	0.78	0.85	0.88	Max. compression	: 271 kgf
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
8.1	5.6	4.9	4.8	2.5	1.7	0.9
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6311 C3		6211 C3		
Sealing	:	V'Ring		V'Ring		
Lubrication interval	:	14000 h		17000 h		
Lubricant amount	:	18 g		11 g		
Lubricant type	:		Mobil Polyrex EM			
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	14/01/2024				1 / 2	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 Close Coupled Pump JM NEMA
Premium Efficiency Three-Phase

Product code : 12712152

LOAD PERFORMANCE CURVE

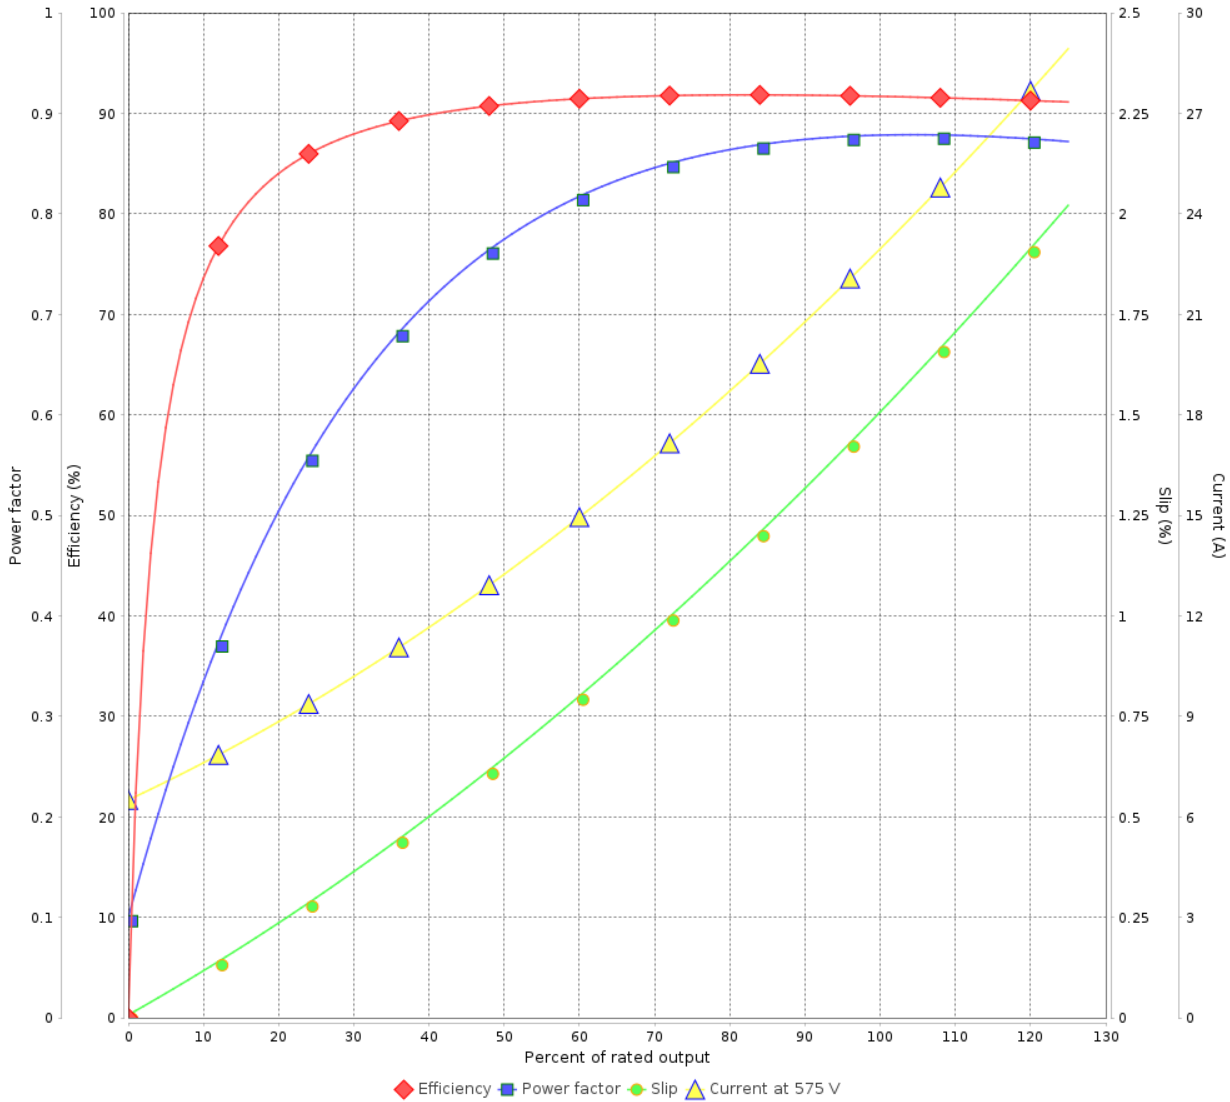

Performance : 575 V 60 Hz 2P

Rated current : 23.0 A
LRC : 6.3
Rated torque : 5.12 kgfm
Locked rotor torque : 200 %
Breakdown torque : 250 %
Rated speed : 3545 rpm

Moment of inertia (J) : 0.1135 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				