

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line		: W22 IEEE 841 NEMA Premium Efficiency Three-Phase		Product code :		12798484
Frame	:	447/9T		Locked rotor time	:	28s (cold) 16s (hot)
Output	:	300 HP (220 kW)		Temperature rise	:	80 K
Poles	:	4		Duty cycle	:	Cont.(S1)
Frequency	:	60 Hz		Ambient temperature	:	-20°C to +40°C
Rated voltage	:	575 V		Altitude	:	1000 m.a.s.l.
Rated current	:	264 A		Protection degree	:	IP55
L. R. Amperes	:	1716 A		Cooling method	:	IC411 - TEFC
LRC	:	6.5x(Code G)		Mounting	:	F-1
No load current	:	76.0 A		Rotation ¹	:	Both (CW and CCW)
Rated speed	:	1780 rpm		Noise level ²	:	75.0 dB(A)
Slip	:	1.11 %		Starting method	:	Direct On Line
Rated torque	:	122 kgfm		Approx. weight ³	:	1359 kg
Locked rotor torque	:	229 %				
Breakdown torque	:	229 %				
Insulation class	:	F				
Service factor	:	1.15				
Moment of inertia (J)	:	3.77 kgm ²				
Design	:	B				
Output	50%	75%	100%	Foundation loads		
Efficiency (%)	95.8	96.2	96.2	Max. traction	:	1782 kgf
Power Factor	0.77	0.84	0.87	Max. compression	:	3140 kgf
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
4.2	3.6	3.3	2.0	1.4	0.9	0.6
Bearing type			Drive end	Non drive end		
:			NU-322 C3	6319 C3		
Sealing			00068			
Lubrication interval			4000 h			8000 h
Lubricant amount			60 g			45 g
Lubricant type			Mobil Polyrex EM			
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	13/01/2024				1 / 2	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 12798484

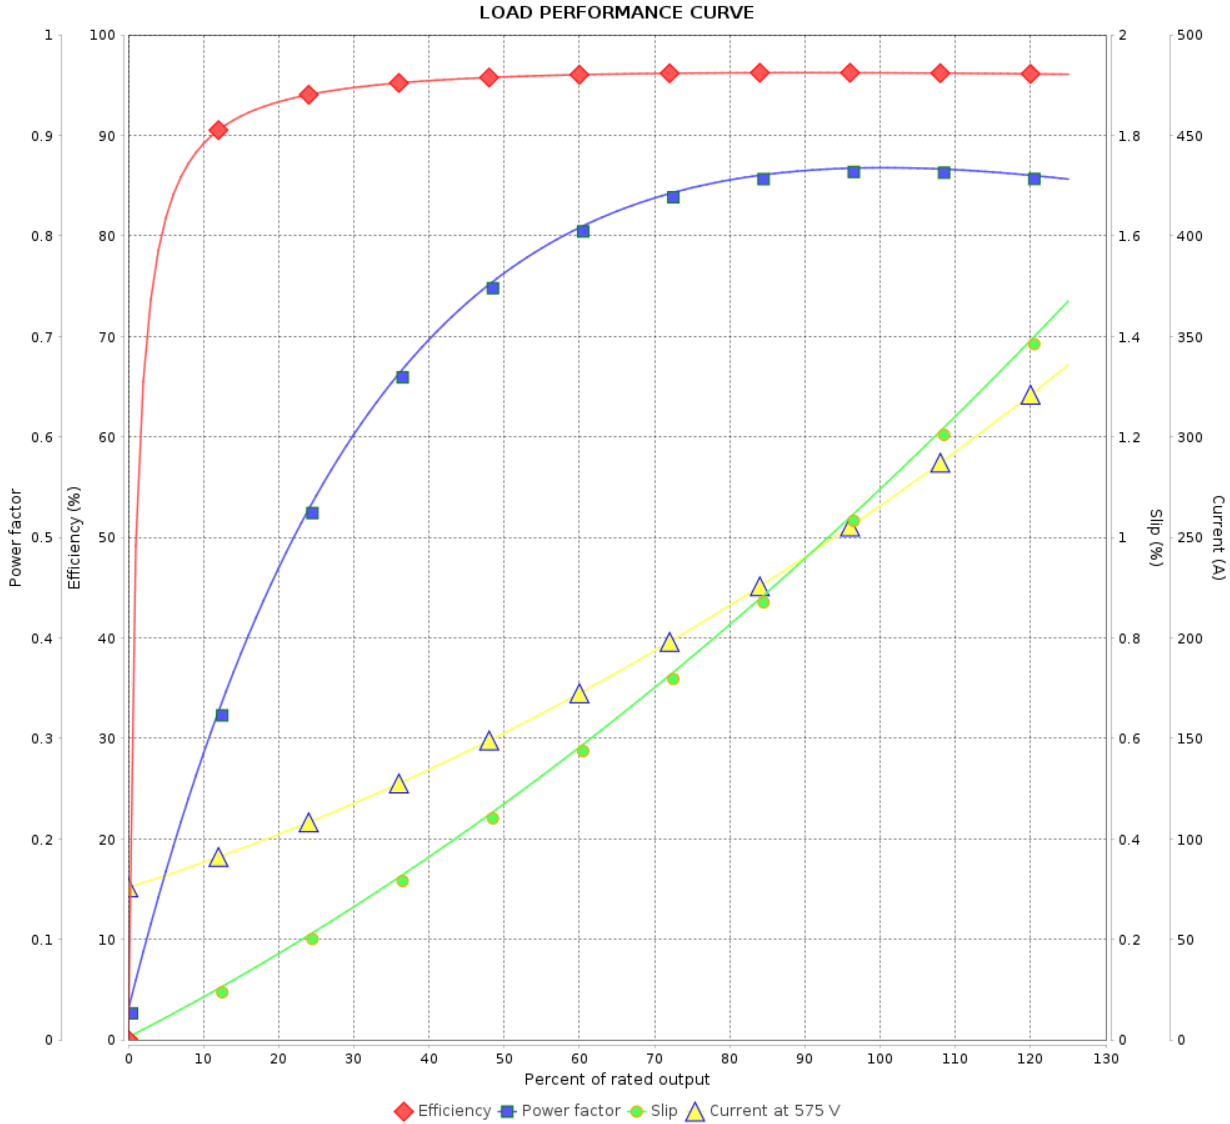

Performance : 575 V 60 Hz 4P

Rated current	: 264 A	Moment of inertia (J)	: 3.77 kgm ²
LRC	: 6.5	Duty cycle	: Cont.(S1)
Rated torque	: 122 kgfm	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	: 1.15
Breakdown torque	: 229 %	Temperature rise	: 80 K
Rated speed	: 1780 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	13/01/2024			