

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium Efficiency Three-Phase      Product code : 13406058

Frame	: 143HP	Locked rotor time	: 32s (cold) 18s (hot)
Output	: 1 HP (0.75 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 1.18 A	Protection degree	: IP55
L. R. Amperes	: 10.1 A	Cooling method	: IC411 - TEFC
LRC	: 8.6x(Code M)	Mounting	: W-6
No load current	: 0.752 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 1760 rpm	Noise level <sup>2</sup>	: 51.0 dB(A)
Slip	: 2.22 %	Starting method	: Direct On Line
Rated torque	: 0.412 kgfm	Approx. weight <sup>3</sup>	: 23.8 kg
Locked rotor torque	: 290 %		
Breakdown torque	: 350 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0049 kgm <sup>2</sup>		
Design	: B		

Output	50%	75%	100%	Foundation loads Max. traction Max. compression
Efficiency (%)	80.0	84.0	85.5	
Power Factor	0.55	0.68	0.75	

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
15.9	12.8	12.5	10.1	7.0	5.8	4.3

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6307 ZZ	6204 ZZ
Sealing	:	V'Ring	V'Ring
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

### Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	26/10/2024			1 / 2	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 P Base NEMA Premium  
Efficiency Three-Phase

Product code : 13406058

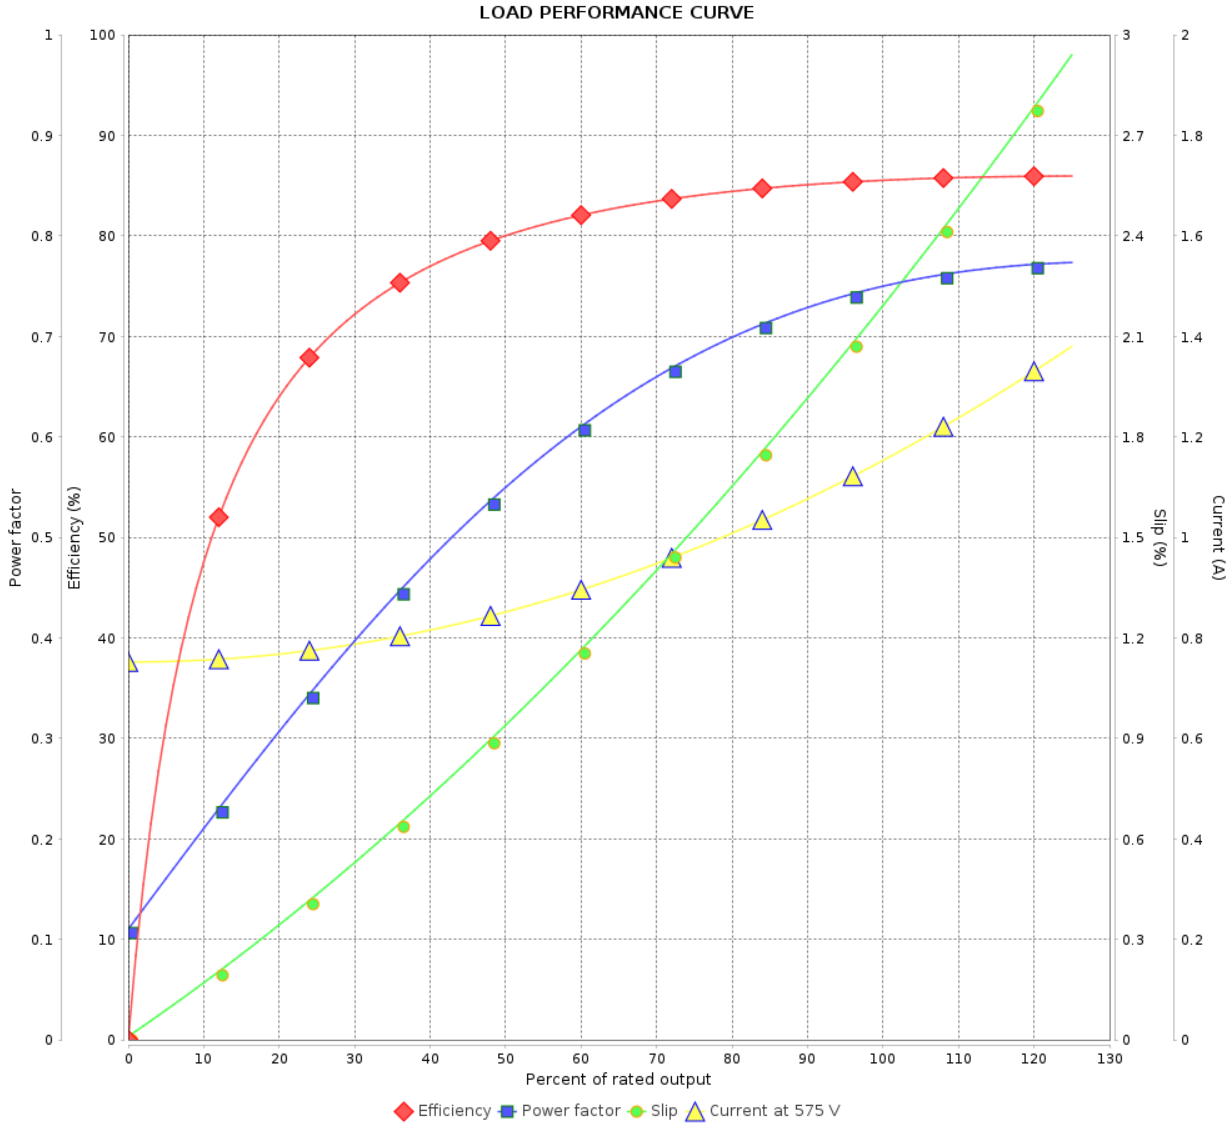

Performance : 575 V 60 Hz 4P

Rated current : 1.18 A  
LRC : 8.6  
Rated torque : 0.412 kgfm  
Locked rotor torque : 290 %  
Breakdown torque : 350 %  
Rated speed : 1760 rpm

Moment of inertia (J) : 0.0049 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.25  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				