

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium Efficiency Three-Phase Product code : 13821926

Frame	: 143/5HP	Locked rotor time	: 25s (cold) 14s (hot)
Output	: 1.5 HP (1.1 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 1.62 A	Protection degree	: IP55
L. R. Amperes	: 13.6 A	Cooling method	: IC411 - TEFC
LRC	: 8.4x(Code L)	Mounting	: W-6
No load current	: 0.840 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1755 rpm	Noise level ²	: 51.0 dB(A)
Slip	: 2.50 %	Starting method	: Direct On Line
Rated torque	: 0.620 kgfm	Approx. weight ³	: 27.0 kg
Locked rotor torque	: 250 %		
Breakdown torque	: 340 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0060 kgm ²		
Design	: B		

Output	25%	50%	75%	100%	Foundation loads
Efficiency (%)	0.000	82.5	85.5	86.5	Max. traction
Power Factor	0.00	0.60	0.70	0.79	Max. compression

	<u>Drive end</u>	<u>Non drive end</u>
Bearing type	: 6307 ZZ	: 6204 ZZ
Sealing	: V'Ring	: V'Ring
Lubrication interval	: 0 h	: 0 h
Lubricant amount	: 0 g	: 0 g
Lubricant type	: Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	14/01/2024			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 P Base NEMA Premium Efficiency
Three-Phase

Product code : 13821926

LOAD PERFORMANCE CURVE

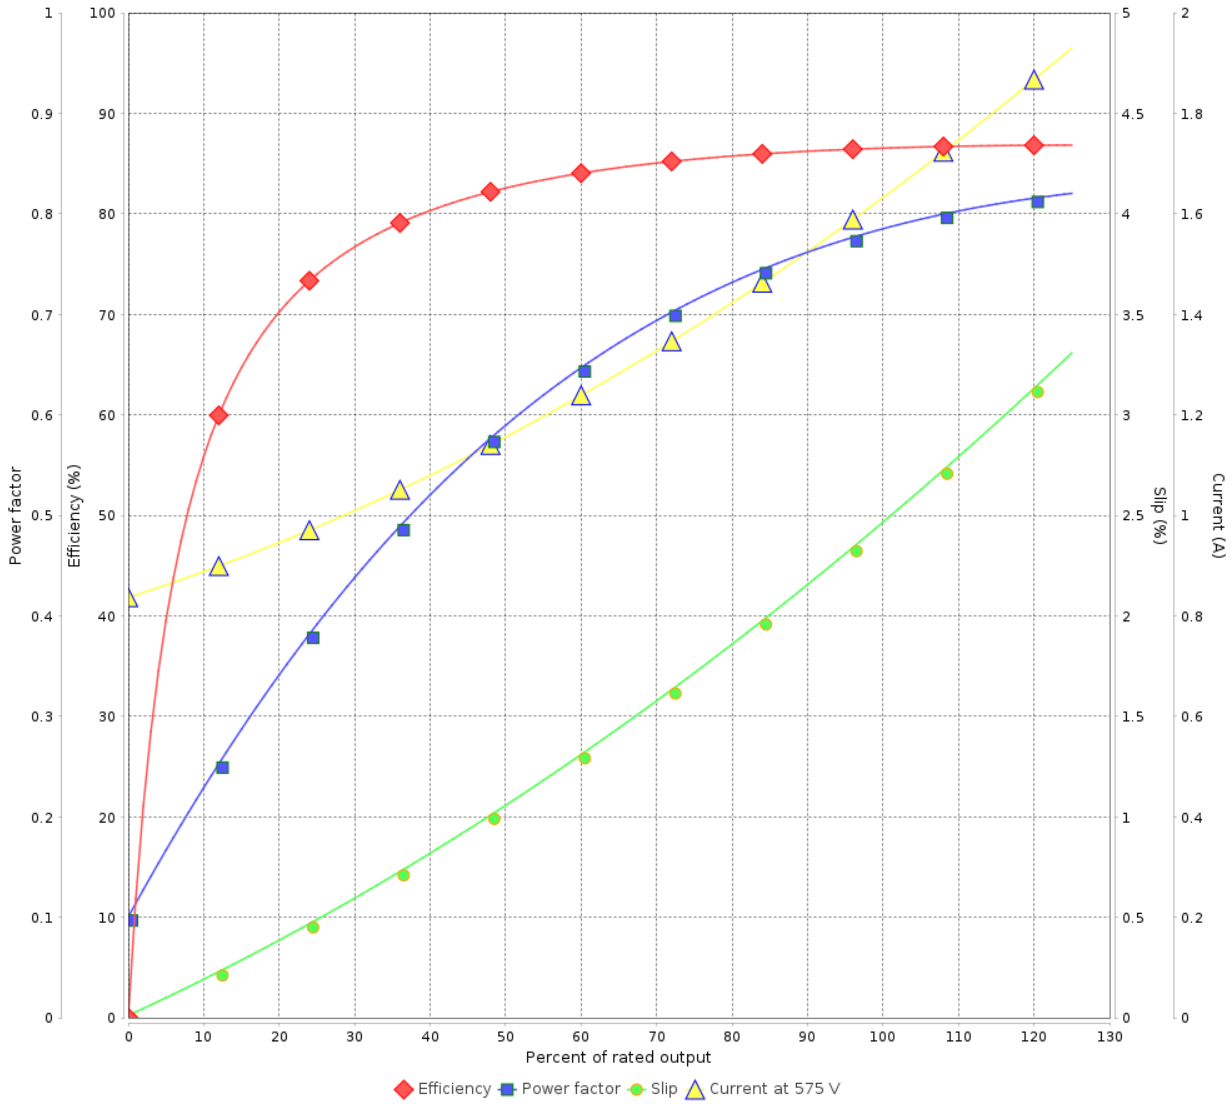

Performance : 575 V 60 Hz 4P

Rated current : 1.62 A
LRC : 8.4
Rated torque : 0.620 kgfm
Locked rotor torque : 250 %
Breakdown torque : 340 %
Rated speed : 1755 rpm

Moment of inertia (J) : 0.0060 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	14/01/2024			