

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 13878036

Frame	: 213/5TC	Locked rotor time	: 36s (cold) 20s (hot)
Output	: 7.5 HP (5.5 kW)	Temperature rise	: 80 K
Frequency	: 60 Hz	Duty cycle	: Cont.(S1)
Rated voltage	: 575 V	Ambient temperature	: -20°C to +40°C
Poles	: 4	Altitude	: 1000 m.a.s.l.
Rated current	: 7.34 A	Protection degree	: IP55
	: 7.1x(Code H)	Cooling method	: IC411 - TEFC
Rated speed	: 1765 rpm	Mounting	: F-1
Rated torque	: 3.08 kgfm	Rotation ¹	: Both (CW and CCW)
Insulation class	: F	Noise level ²	: 58.0 dB(A)
Service factor	: 1.25	Starting method	: Direct On Line
Moment of inertia (J)	: 0.0566 kgm ²	Approx. weight ³	: 87.6 kg
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	89.5	91.0	91.7	Max. traction	: 116 kgf
Power Factor	0.66	0.76	0.82	Max. compression	: 203 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
10.2	9.0	8.4	4.8	3.6	2.4	1.7

	Drive end	Non drive end
Bearing type	: 6308 ZZ	: 6207 ZZ
Sealing	: V'Ring	: Lip Seal
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	: 00088	

Notes


This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 3		
Date	30/03/2026			

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer : _____

Brake information

Voltage: 525-575 V
Brake Torque: 8.15 kgfm

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	30/03/2026		2 / 3	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 13878036

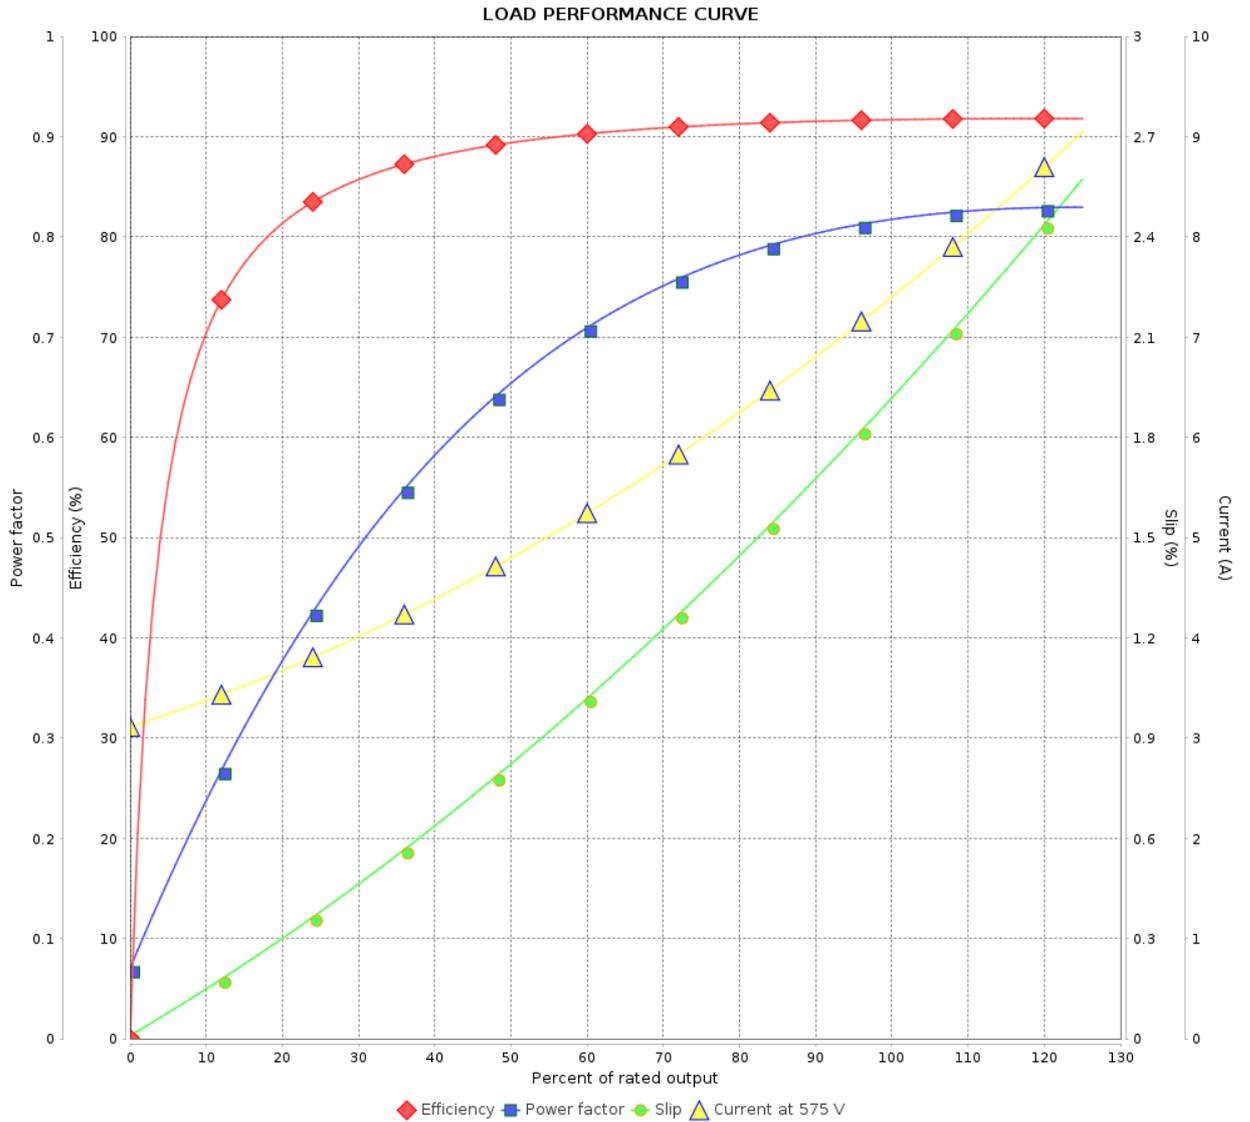

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 3	Revision
Checked by				
Date	30/03/2026			