

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :					
Product line : Three-Phase		Product code : 13986833			
Frame : 56C	Cooling method : IC01 - ODP				
Insulation class : F	Mounting : F-1				
Duty cycle : Cont.(S1)	Rotation ¹ : Both (CW and CCW)				
Ambient temperature : -20°C to +40°C	Starting method : Direct On Line				
Altitude : 1000 m.a.s.l.	Approx. weight ³ : 17.0 kg				
Design : A	Moment of inertia (J) : 0.0055 kgm ²				
Output [HP]	1.5				
Poles	4				
Frequency [Hz]	60				
Rated voltage [V]	575				
Rated current [A]	1.68				
L. R. Amperes [A]	14.8				
LRC [A]	8.8x(Code L)				
No load current [A]	1.04				
Rated speed [RPM]	1760				
Slip [%]	2.22				
Rated torque [kgfm]	0.619				
Locked rotor torque [%]	290				
Breakdown torque [%]	350				
Service factor	1.15				
Temperature rise	80 K				
Locked rotor time	25s (cold) 14s (hot)				
Noise level ²	52.0 dB(A)				
Efficiency (%)	25%				
	50%	84.0			
	75%	85.5			
	100%	86.5			
Power Factor	25%				
	50%	0.53			
	75%	0.66			
	100%	0.76			
Bearing type : 6204 ZZ	Drive end	Non drive end	Foundation loads		
Sealing : Without			Max. traction	: 61 kgf	
	Bearing Seal	Bearing Seal	Max. compression	: 78 kgf	
Lubrication interval : -	-	-			
Lubricant amount : -	-	-			
Lubricant type : Mobil Polyrex EM					
Notes					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	11/05/2022			Page	Revision
				1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Three-Phase

Product code : 13986833

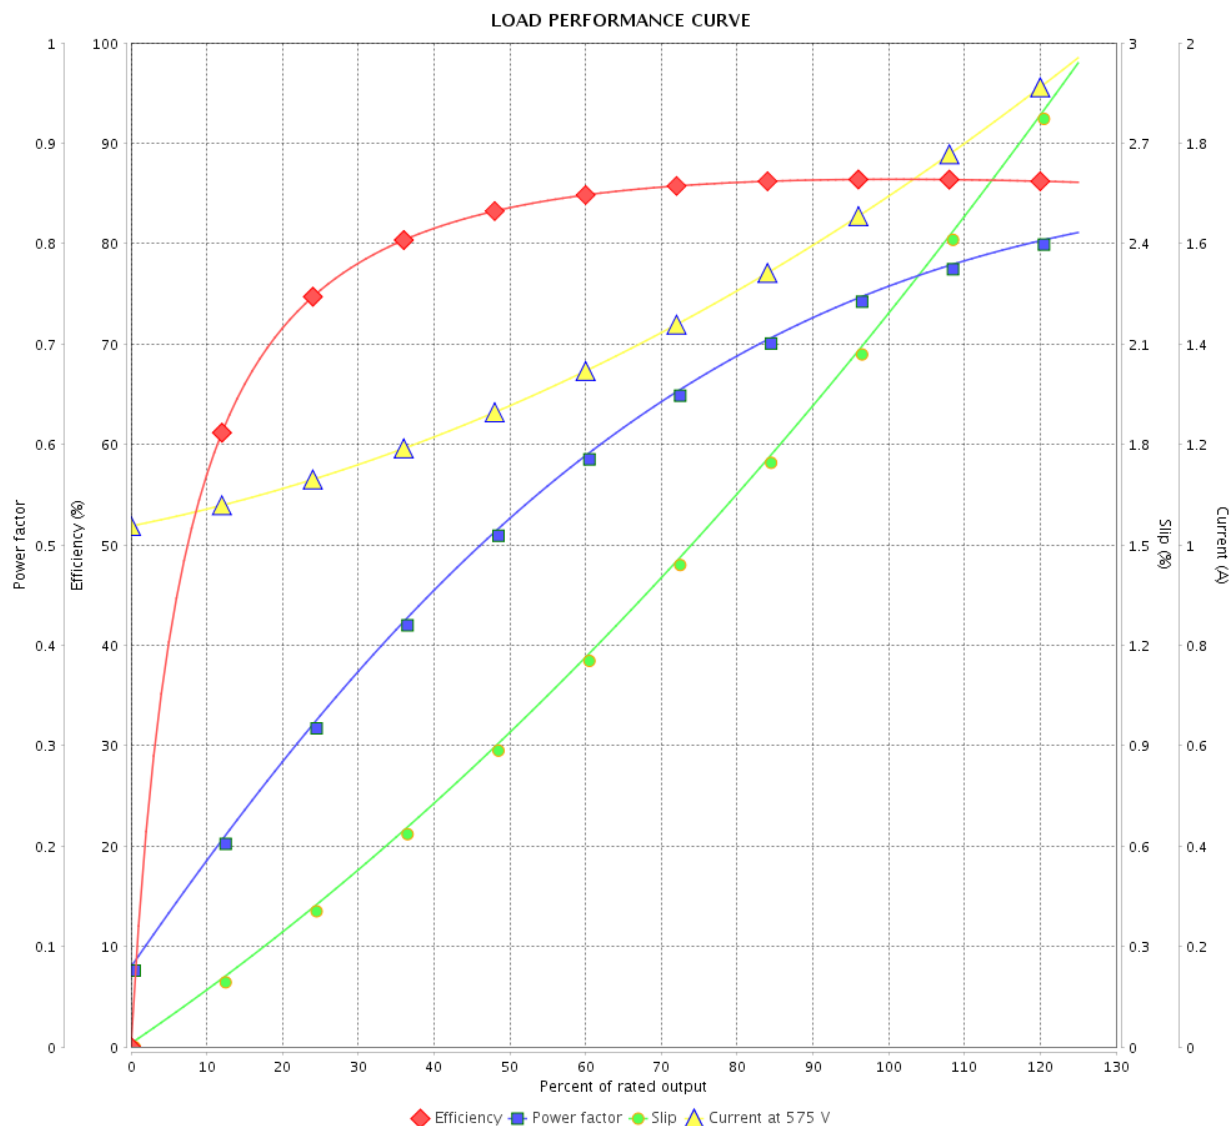

Performance : 575 V 60 Hz 4P

Rated current : 1.68 A
 LRC : 8.8
 Rated torque : 0.619 kgfm
 Locked rotor torque : 290 %
 Breakdown torque : 350 %
 Rated speed : 1760 rpm

Moment of inertia (J) : 0.0055 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : A

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					