

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line : Three-Phase	Product code : 13997112			
Frame : 56H Insulation class : F Duty cycle : Cont.(S1) Ambient temperature : -20°C to +40°C Altitude : 1000 m.a.s.l. Protection degree : IP55 Design : B	Cooling method : IC411 - TEFC Mounting : F-1 Rotation ¹ : Both (CW and CCW) Starting method : Direct On Line Approx. weight ³ : 18.0 kg Moment of inertia (J) : 0.0054 kgm ²			
Output [HP]	2			
Poles	2			
Frequency [Hz]	60			
Rated voltage [V]	575			
Rated current [A]	1.98			
L. R. Amperes [A]	19.6			
LRC [A]	9.9x(Code L)			
No load current [A]	0.850			
Rated speed [RPM]	3520			
Slip [%]	2.22			
Rated torque [kgfm]	0.412			
Locked rotor torque [%]	250			
Breakdown torque [%]	300			
Service factor	1.15			
Temperature rise	80 K			
Locked rotor time	23s (cold) 13s (hot)			
Noise level ²	68.0 dB(A)			
Efficiency (%)	25%			
	50%	82.5		
	75%	85.5		
	100%	85.5		
Power Factor	25%			
	50%	0.73		
	75%	0.83		
	100%	0.89		
Bearing type : <u>Drive end</u> 6204 ZZ <u>Non drive end</u> 6202 ZZ Sealing : V'Ring V'Ring Lubrication interval : - - Lubricant amount : - - Lubricant type : Mobil Polyrex EM	Foundation loads Max. traction : 30 kgf Max. compression : 48 kgf			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.	These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	11/05/2022		1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Three-Phase

Product code : 13997112

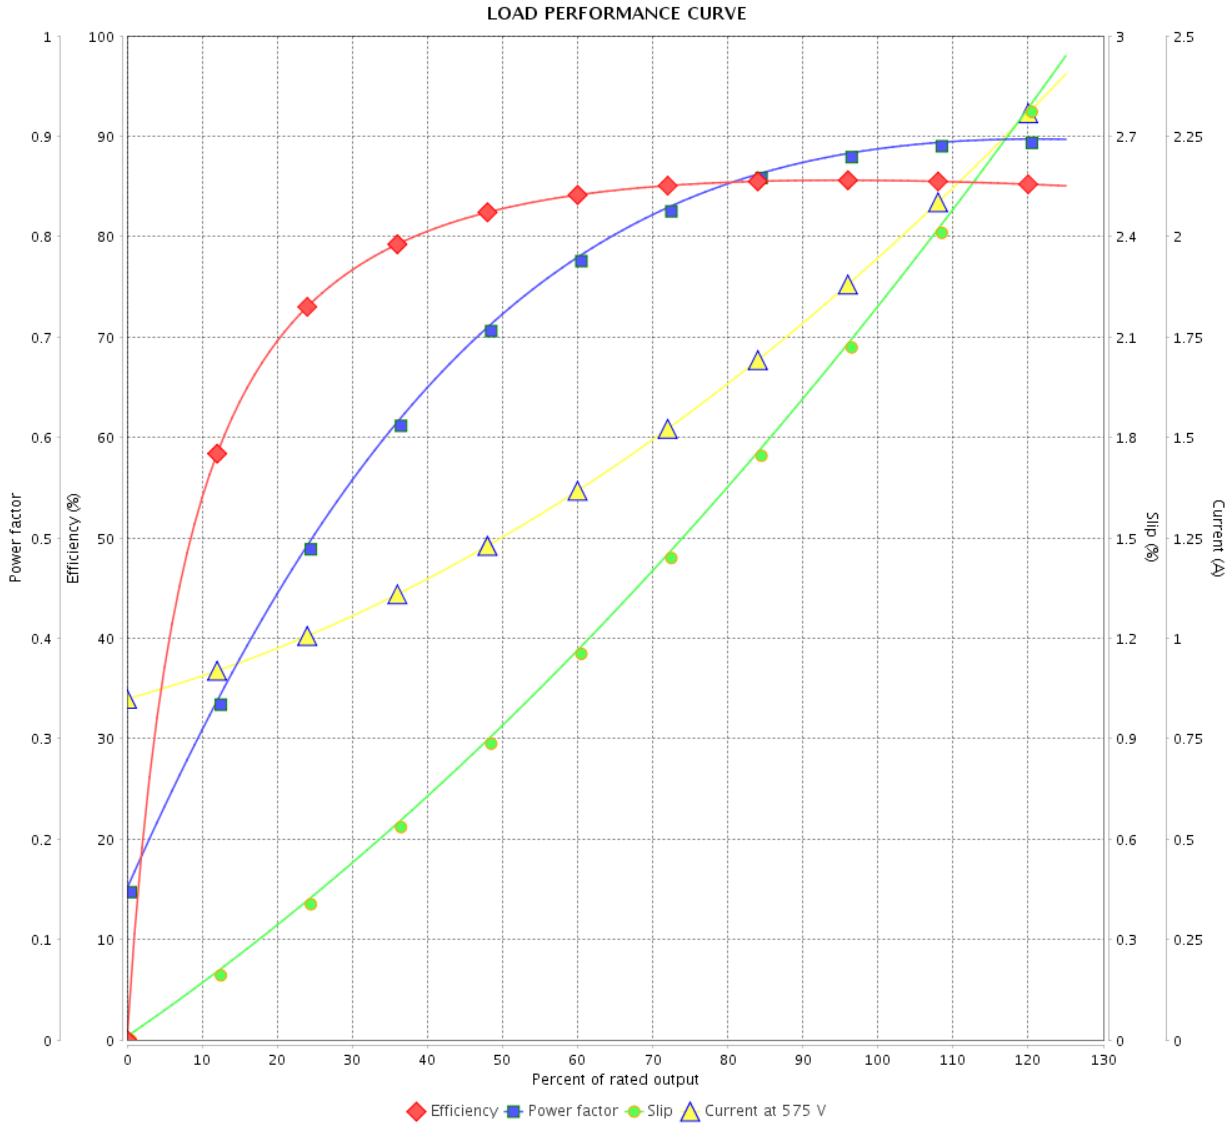

Performance : 575 V 60 Hz 2P

Rated current : 1.98 A
 LRC : 9.9
 Rated torque : 0.412 kgfm
 Locked rotor torque : 250 %
 Breakdown torque : 300 %
 Rated speed : 3520 rpm

Moment of inertia (J) : 0.0054 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	11/05/2022			