

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 14016376

Frame	: 182/4TC	Locked rotor time	: 41s (cold) 23s (hot)
Output	: 3 HP (2.2 kW)	Temperature rise	: 80 K
Frequency	: 60 Hz	Duty cycle	: Cont.(S1)
Rated voltage	: 575 V	Ambient temperature	: -20°C to +40°C
Poles	: 4	Altitude	: 1000 m.a.s.l.
Rated current	: 3.21 A	Protection degree	: IP55
	: 8.2x(Code K)	Cooling method	: IC411 - TEFC
Rated speed	: 1765 rpm	Mounting	: F-1
Rated torque	: 1.23 kgfm	Rotation ¹	: Both (CW and CCW)
Insulation class	: F	Noise level ²	: 56.0 dB(A)
Service factor	: 1.25	Starting method	: Direct On Line
Moment of inertia (J)	: 0.0143 kgm ²	Approx. weight ³	: 53.8 kg
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	87.5	88.5	89.5	Max. traction	: 56 kgf
Power Factor	0.58	0.69	0.77	Max. compression	: 109 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
12.7	11.2	10.8	6.7	5.0	3.7	2.8

	Drive end	Non drive end
Bearing type	: 6207 ZZ	: 6206 ZZ
Sealing	: V'Ring	: Lip Seal
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	00088	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 1 / 3		
Checked by				
Date	30/03/2026			

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Brake information

Voltage: 525-575 V
Brake Torque: 6.12 kgfm

Rev.	Changes Summary		Performed	Checked	Date
Performed by			Page 2 / 3		Revision
Checked by					
Date	30/03/2026				


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 14016376

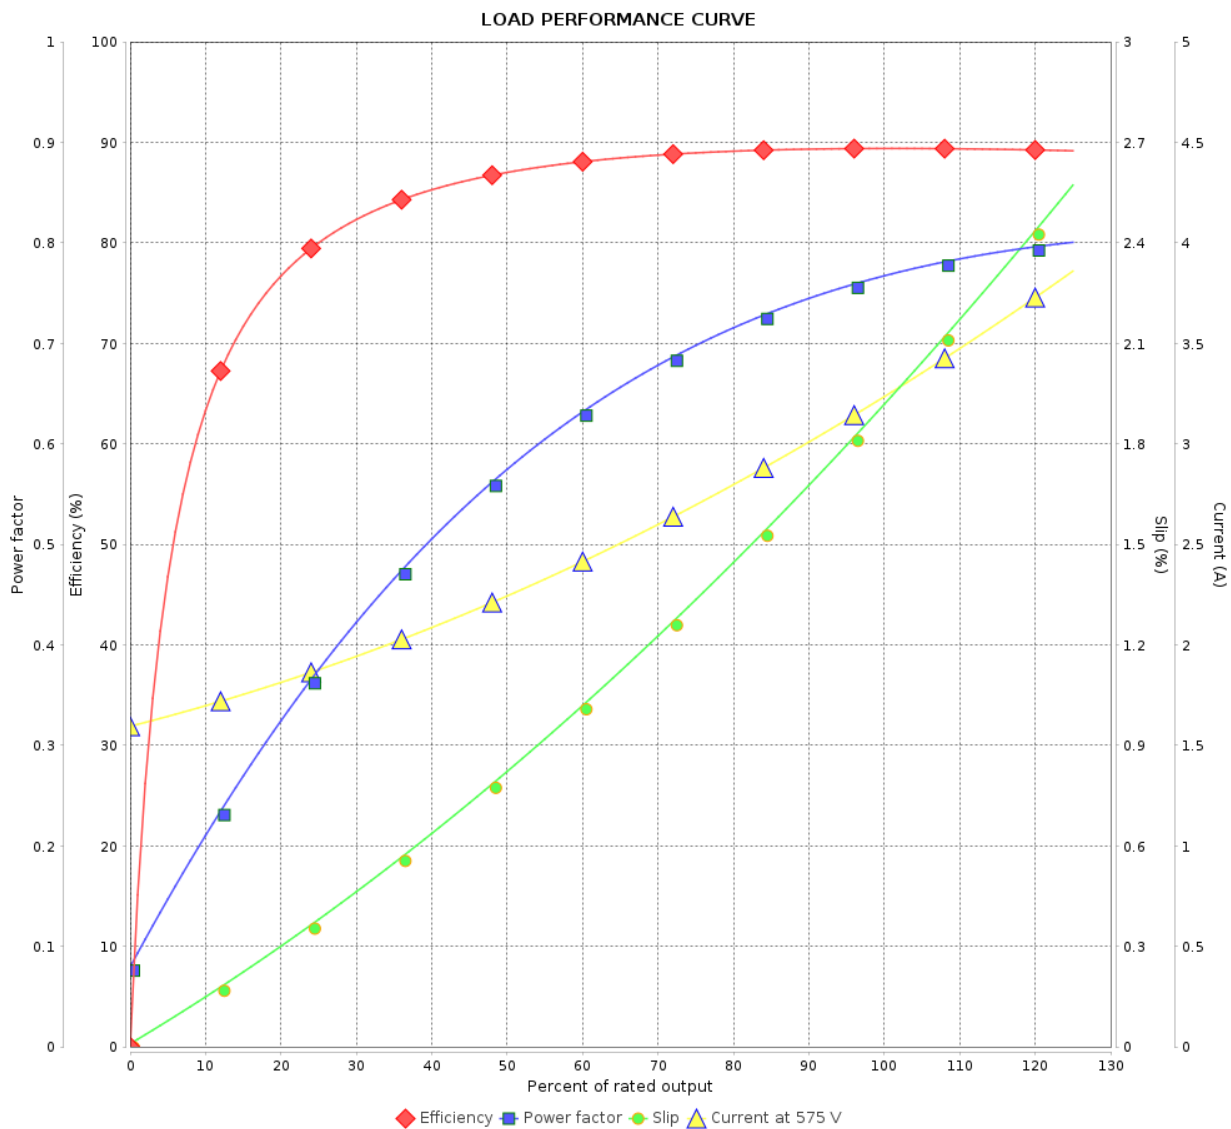

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 3 / 3 Revision		
Checked by				
Date	30/03/2026			