

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 14039646						
Frame	: 254/6T			Locked rotor time	: 54s (cold) 30s (hot)	
Output	: 7.5 HP (5.5 kW)			Temperature rise	: 80 K	
Poles	: 6			Duty cycle	: Cont.(S1)	
Frequency	: 60 Hz			Ambient temperature	: -20°C to +40°C	
Rated voltage	: 575 V			Altitude	: 1000 m.a.s.l.	
Rated current	: 7.58 A			Protection degree	: IP55	
L. R. Amperes	: 51.6 A			Cooling method	: IC411 - TEFC	
LRC	: 6.8x(Code H)			Mounting	: F-1	
No load current	: 3.60 A			Rotation ¹	: Both (CW and CCW)	
Rated speed	: 1178 rpm			Noise level ²	: 59.0 dB(A)	
Slip	: 1.83 %			Starting method	: Direct On Line	
Rated torque	: 4.62 kgfm			Approx. weight ³	: 158 kg	
Locked rotor torque	: 250 %					
Breakdown torque	: 300 %					
Insulation class	: F					
Service factor	: 1.25					
Moment of inertia (J)	: 0.1652 kgm ²					
Design	: B					
Output	50%	75%	100%	Foundation loads		
Efficiency (%)	89.5	90.2	91.0	Max. traction	: 139 kgf	
Power Factor	0.63	0.74	0.80	Max. compression	: 297 kgf	
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
9.6	8.0	7.4	5.1	3.4	2.4	1.7
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6309 C3		6209 C3		
Sealing	:	Lip Seal		Lip Seal		
Lubrication interval	:	20000 h		20000 h		
Lubricant amount	:	13 g		9 g		
Lubricant type	:	Mobil Polyrex EM				
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	15/01/2024				1 / 3	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Brake information

Voltage: 525-575 V
Brake Torque: 15.3 kgfm

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 3	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 14039646

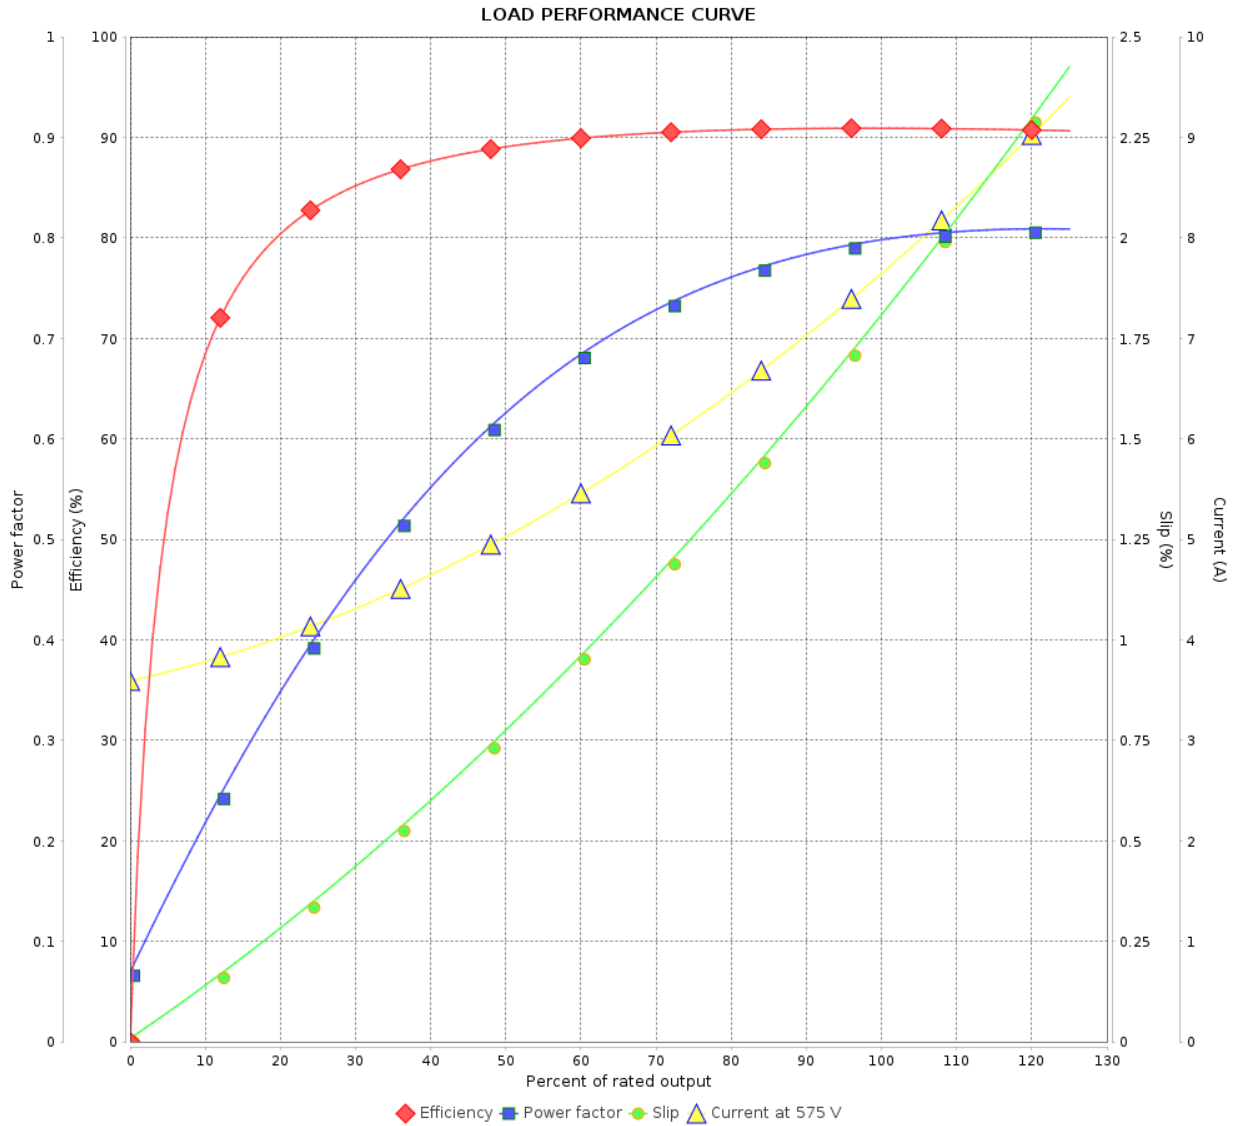

Performance : 575 V 60 Hz 6P

Rated current : 7.58 A
 LRC : 6.8
 Rated torque : 4.62 kgfm
 Locked rotor torque : 250 %
 Breakdown torque : 300 %
 Rated speed : 1178 rpm

Moment of inertia (J) : 0.1652 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 3	Revision
Checked by				
Date	15/01/2024			