

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 P Base NEMA Premium Efficiency Three-Phase      Product code : 14046783

Frame	: 213HP	Locked rotor time	: 104s (cold) 58s (hot)
Output	: 3 HP (2.2 kW)	Temperature rise	: 80 K
Poles	: 6	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 3.53 A	Protection degree	: IP55
L. R. Amperes	: 24.7 A	Cooling method	: IC411 - TEFC
LRC	: 7.0x(Code K)	Mounting	: W-6
No load current	: 2.04 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 1175 rpm	Noise level <sup>2</sup>	: 55.0 dB(A)
Slip	: 2.08 %	Starting method	: Direct On Line
Rated torque	: 1.85 kgfm	Approx. weight <sup>3</sup>	: 71.2 kg
Locked rotor torque	: 190 %		
Breakdown torque	: 270 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0504 kgm <sup>2</sup>		
Design	: B		

Output	50%	75%	100%	Foundation loads Max. traction Max. compression
Efficiency (%)	86.5	88.5	89.5	
Power Factor	0.50	0.63	0.70	

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
11.0	8.6	8.0	6.6	4.3	3.4	2.4

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6309 ZZ	6207 ZZ
Sealing	:	V'Ring	V'Ring
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

### Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	27/10/2024			

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 P Base NEMA Premium  
Efficiency Three-Phase

Product code : 14046783

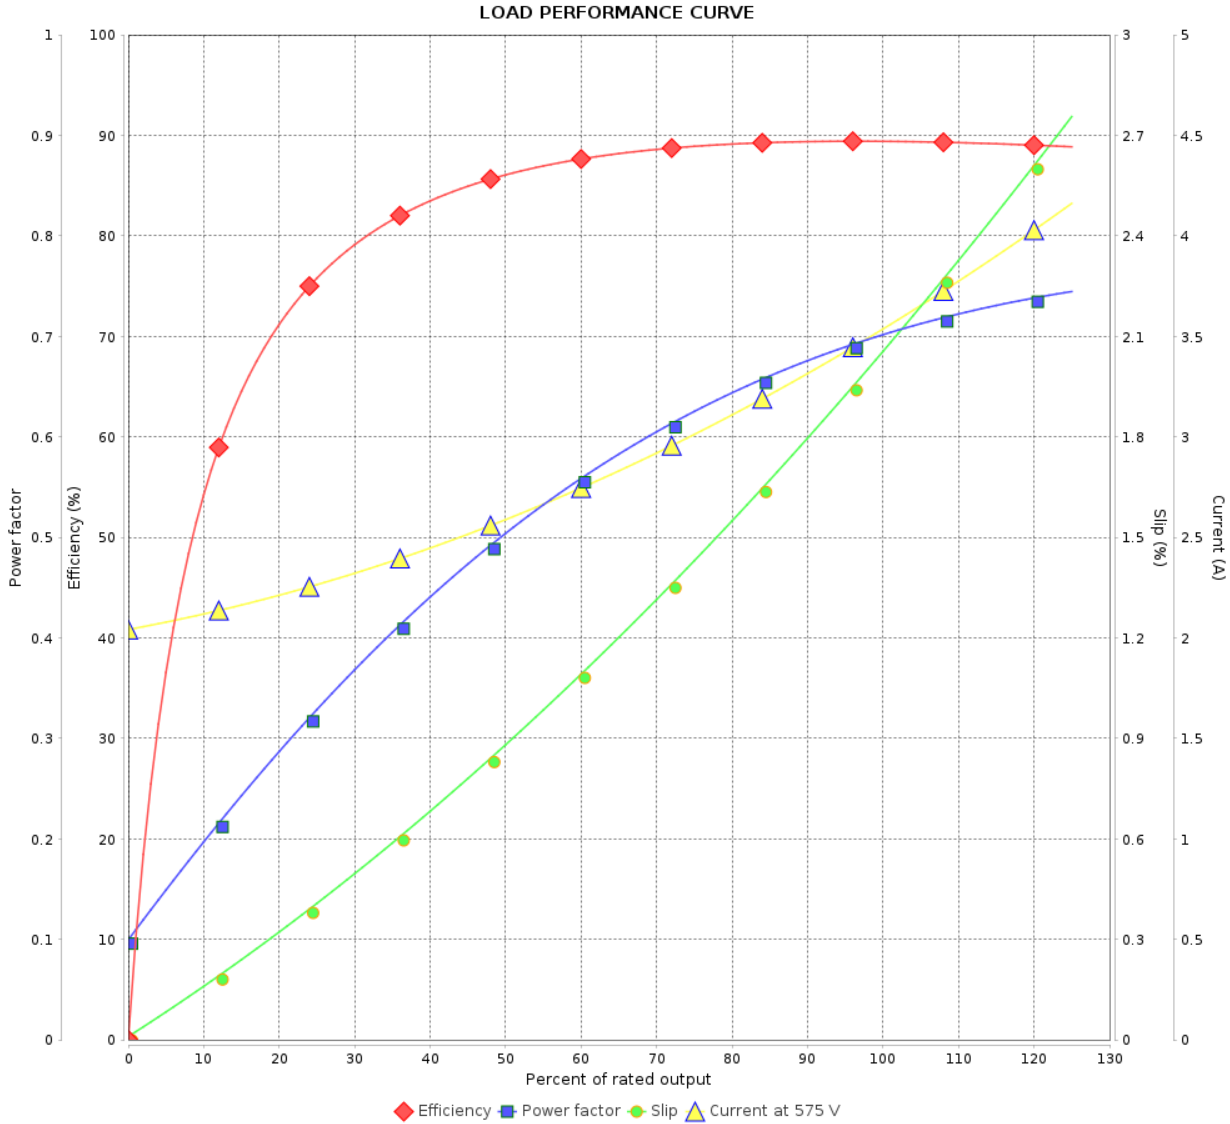

Performance : 575 V 60 Hz 6P

Rated current : 3.53 A  
 LRC : 7.0  
 Rated torque : 1.85 kgfm  
 Locked rotor torque : 190 %  
 Breakdown torque : 270 %  
 Rated speed : 1175 rpm

Moment of inertia (J) : 0.0504 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	27/10/2024			