

# DATA SHEET

## Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Single-Phase

Product code : 14091668

Frame	: 213/5T	Locked rotor time	: 25s (cold) 14s (hot)
Output	: 5 HP (3.7 kW)	Temperature rise	: 80 K
Poles	: 6	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 208-230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 22.0-21.2/10.6 A	Protection degree	: IP55
L. R. Amperes	: 185-178/89.0 A	Cooling method	: IC411 - TEFC
LRC	: 8.4x(Code K)	Mounting	: F-1
No load current	: 6.47-7.50/3.75 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 1175 rpm	Noise level <sup>2</sup>	: 63.0 dB(A)
Slip	: 2.08 %	Starting method	: Direct On Line
Rated torque	: 3.09 kgfm	Approx. weight <sup>3</sup>	: 84.4 kg
Locked rotor torque	: 220 %		
Breakdown torque	: 250 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0836 kgm <sup>2</sup>		

Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	77.4	77.0	83.9	82.5	Max. traction	: 100 kgf
Power Factor	0.56	0.85	0.90	0.92	Max. compression	: 185 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6308 ZZ	6206 ZZ
Sealing	:	V'Ring	V'Ring
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2 Revision		
Checked by				
Date	15/01/2024			

# LOAD PERFORMANCE CURVE


## Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Single-Phase

Product code : 14091668

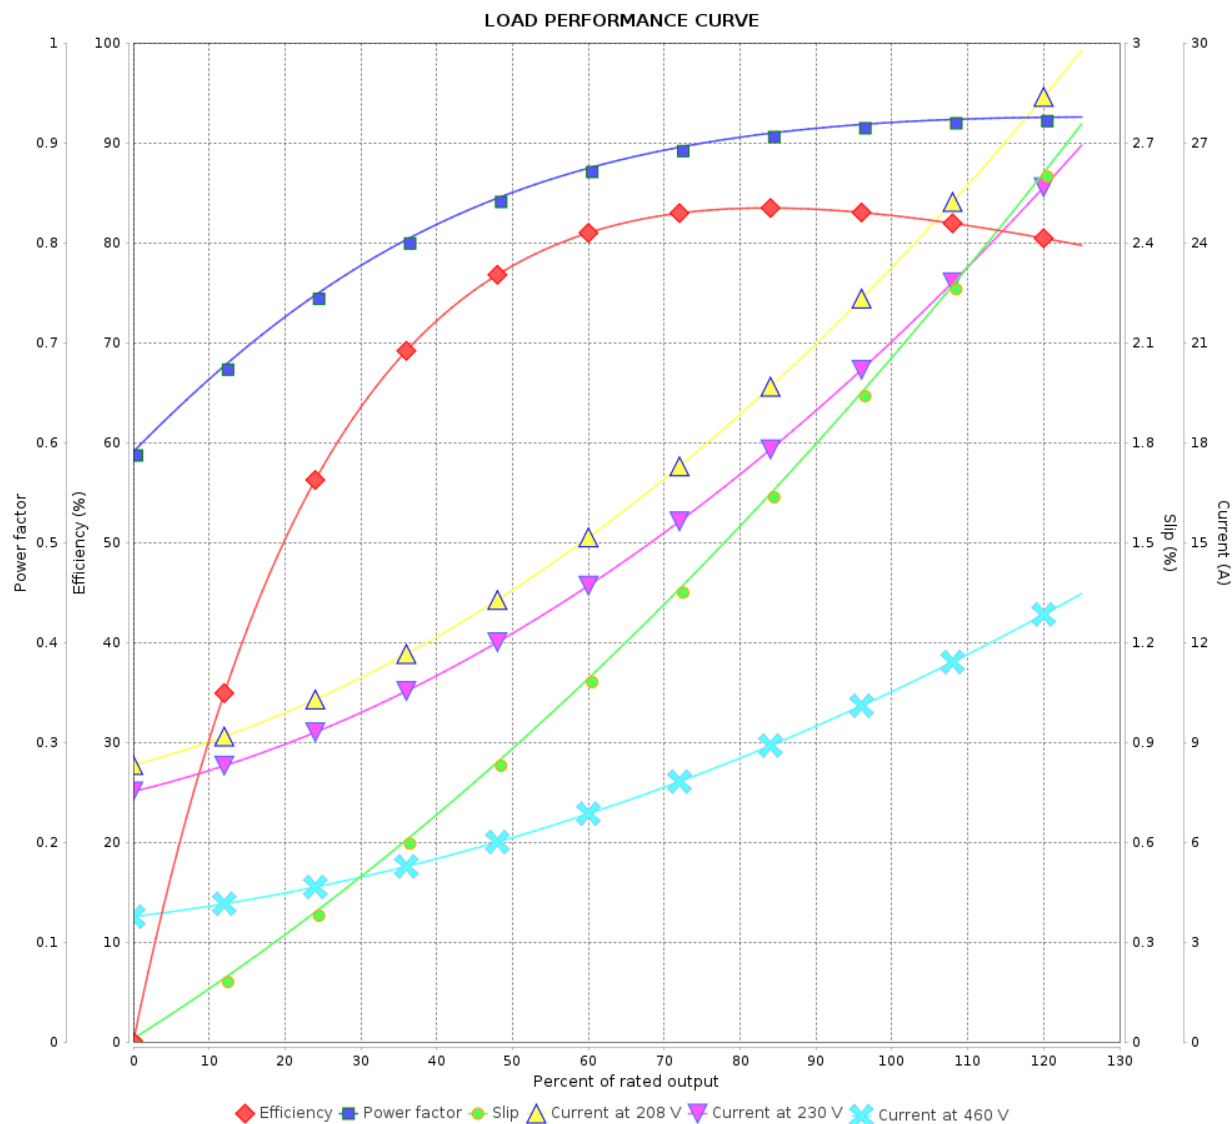

Performance : 208-230/460 V 60 Hz 6P

Rated current : 22.0-21.2/10.6 A  
LRC : 8.4  
Rated torque : 3.09 kgfm  
Locked rotor torque : 220 %  
Breakdown torque : 250 %  
Rated speed : 1175 rpm

Moment of inertia (J) : 0.0836 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor :  
Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 2 / 2Revision		
Checked by				
Date	15/01/2024			